


REV. 1
DCO 16356

COIL: @ 25°C	540 - 770 OHMS
RESISTANCE	
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX., 2.3 VDC MIN.

CUSTOMER DATA SHEET

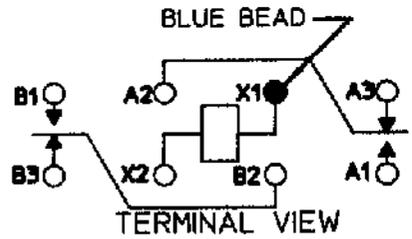

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	15	g's
SHOCK	100	g's	6 ± 1	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING:	2A 28 VDC RESISTIVE 100,000 OPERATIONS MINIMUM
-----------------	--

NOTES: OPERATE & RELEASE 6 MS MAX.
CONTACT BOUNCE 1 MS MAX.

DR. PBB 5-5-00 CK. TLG 7-12-00

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M5757/10-054 REV.

'FW' RELAY

FW1201G03