
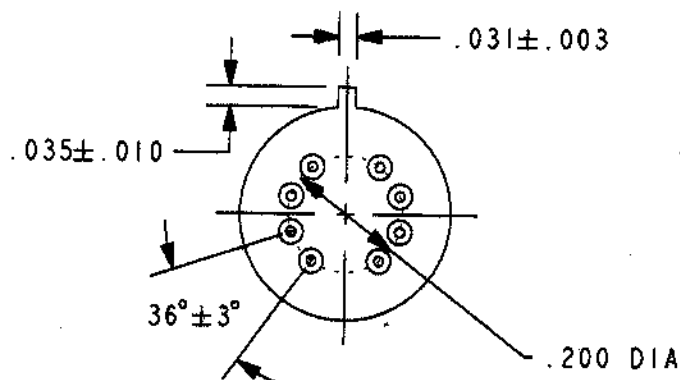


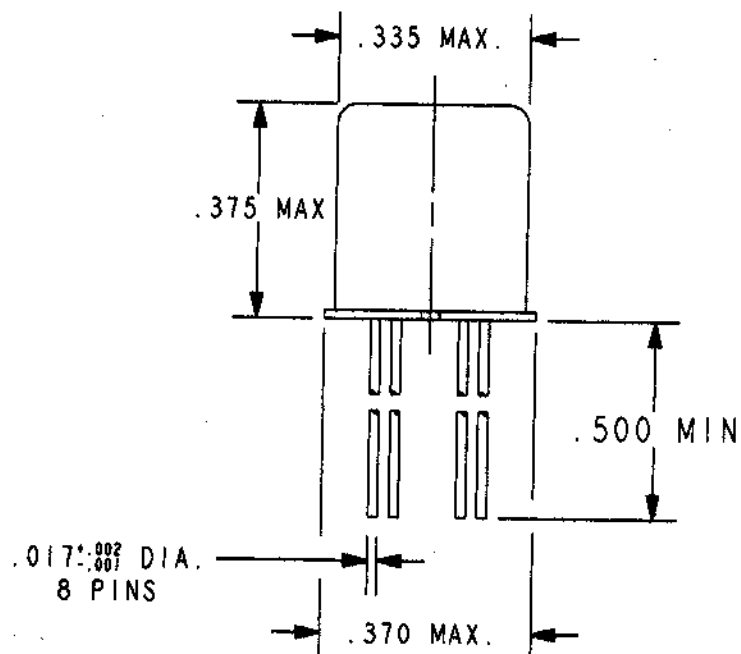

REV. 0
DCO 143373

COIL: @ 25°C
RESISTANCE 3300 OHMS ±10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 15.2 VDC
MUST RELEASE 10.8 VDC MAX; 1.7 VDC MIN.


ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 7.5 MS MAX.

CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 12/19/01 CK 12/19/01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/21-038P REV.

"JMSDD" RELAY

JMSCDD-26XP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[JMSCDD-26XP](#)