

isc Silicon PNP Power Transistor

TIP34B

DESCRIPTION

- DC Current Gain-
: $h_{FE} = 40(\text{Min}) @ I_C = -1\text{A}$
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(\text{SUS})} = -80\text{V}(\text{Min})$
- Complement to Type TIP33B

APPLICATIONS



- Designed for use in general purpose power amplifier and switching applications.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-10	A
I_{CM}	Collector Current-peak	-15	A
I_B	Base Current	-3	A
P_C	Collector Power Dissipation@ $T_C = 25^\circ\text{C}$	80	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.56	$^\circ\text{C/W}$

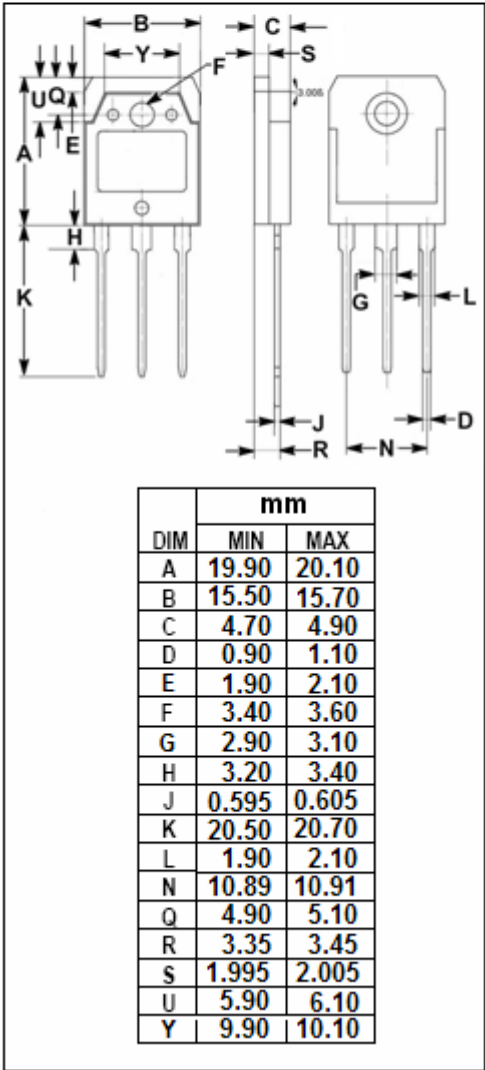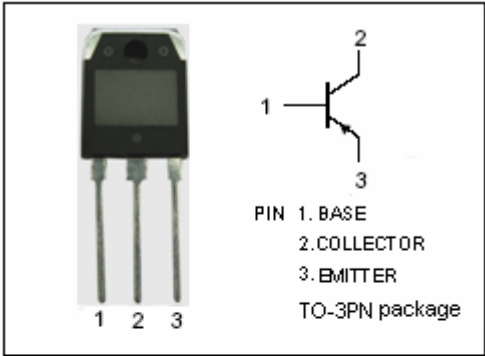

isc Silicon PNP Power Transistor**TIP34B****ELECTRICAL CHARACTERISTICS** **$T_C=25^{\circ}\text{C}$ unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = -30\text{mA}$; $I_B = 0$	-80		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = -3\text{A}$; $I_B = -0.3\text{A}$		-1.0	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = -10\text{A}$; $I_B = -2.5\text{A}$		-4.0	V
$V_{BE(on)-1}$	Base-Emitter On Voltage	$I_C = -3\text{A}$; $V_{CE} = -4\text{V}$		-1.6	V
$V_{BE(on)-2}$	Base-Emitter On Voltage	$I_C = -10\text{A}$; $V_{CE} = -4\text{V}$		-3.0	V
I_{CEO}	Collector Cutoff Current	$V_{CE} = -60\text{V}$; $I_B = 0$		-0.7	mA
I_{CES}	Collector Cutoff Current	$V_{CE} = -80\text{V}$; $V_{EB} = 0$		-0.4	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -5\text{V}$; $I_C = 0$		-1.0	mA
h_{FE-1}	DC Current Gain	$I_C = -1\text{A}$; $V_{CE} = -4\text{V}$	40		
h_{FE-2}	DC Current Gain	$I_C = -3\text{A}$; $V_{CE} = -4\text{V}$	20	100	
f_T	Current-Gain—Bandwidth Product	$I_C = -0.5\text{A}$; $V_{CE} = -10\text{V}$; $f_{test} = 1.0\text{MHz}$	3		MHz