
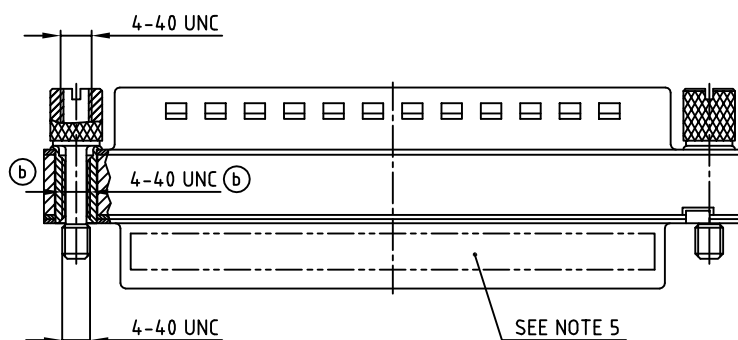
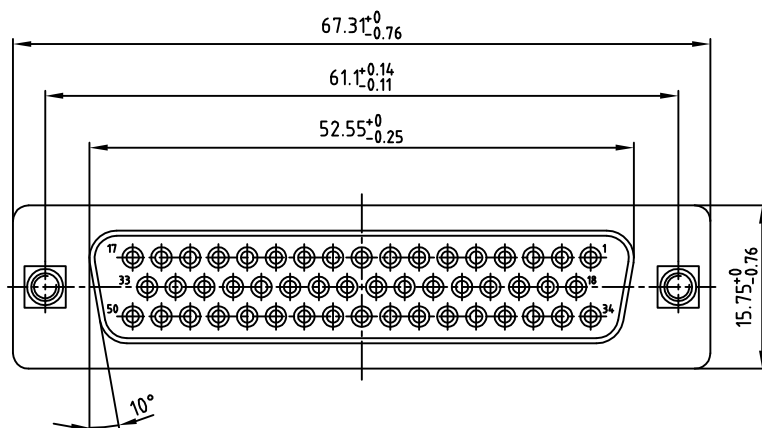


1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
5. CONNECTOR IS PART MARKED: 163A50049X CONEC ABC

APPROVAL # FREIGARE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGARE # DEBLOCAGE # AUTORIZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGARE # DEBLOCAGE # AUTORIZACION # APPROVAL	APPROVAL # FREIGARE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

2 x b	Ä 214.1	30.12.2004	Lehmer
rev.	description	date	name

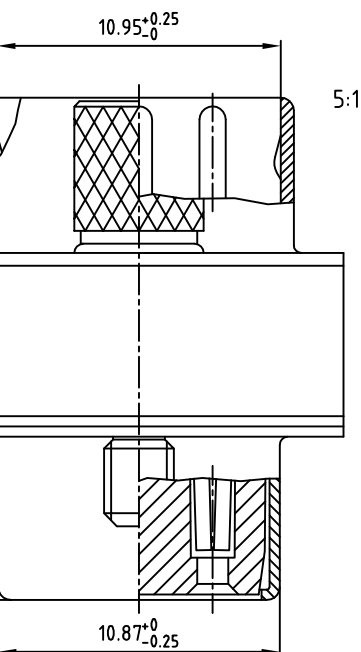

dim. in mm

scale:	2:1 (5:1)
material:	SEE NOTES

title:	ADAPTER PLUG / SOCKET 50pos. 4-40 UNC
--------	---

dwg no:	AutoCAD 2004	DIN-A
---------	--------------	-------

16K2A560

part no:	163A50049X
----------	------------



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[163A50029X](#) [163A50049X](#)