
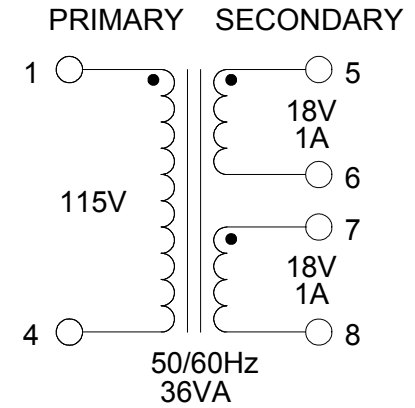


DIMENSIONS:	
L	2.625" ± 0.030
W	2.188" ± 0.030
H	1.563" ± 0.030
A	0.400" ± 0.030
B	0.400" ± 0.030
C	1.850" ± 0.030
D	0.041" x 0.018" ± 0.005
N	1.750" ± 0.030
P	2.188" ± 0.030

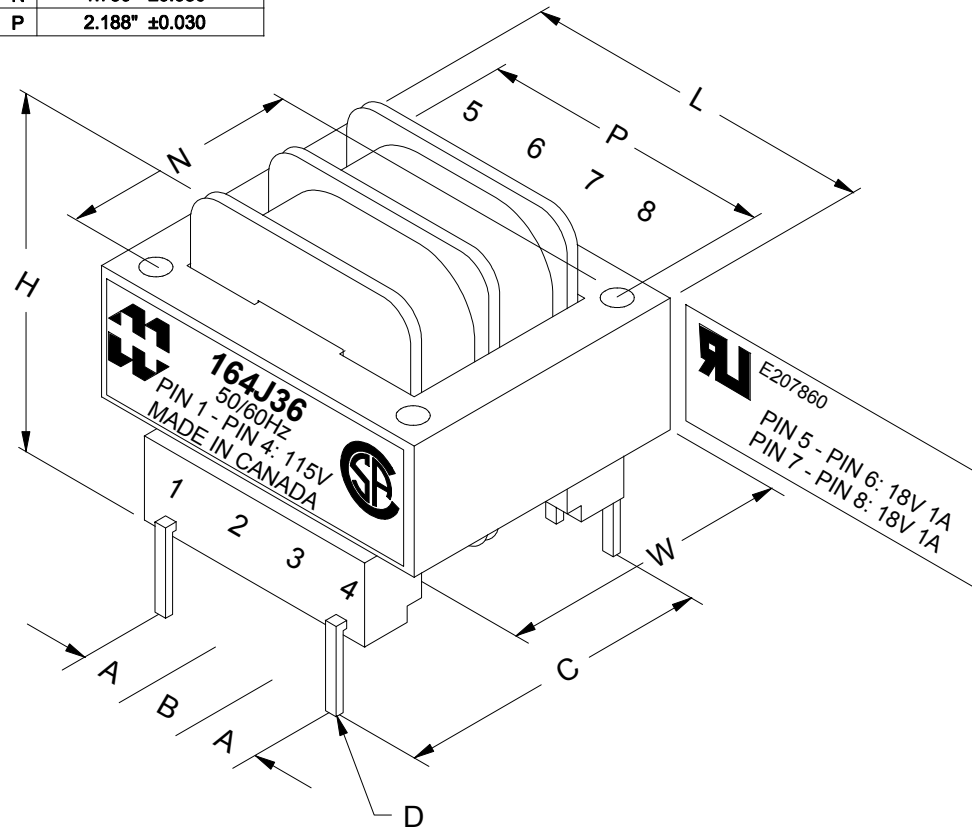

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 4	97.2mA Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 4	
	PIN 5 - PIN 6 =	21.30V $\pm 2\%$
	PIN 7 - PIN 8 =	21.30V $\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 4 =	20.63 Ω $\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	1.522 Ω $\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	1.522 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	09/10/15	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT	DWG. NO.
			DATE: 09/10/15	APP'D. BY:	POWER TRANSFORMER	164J36
			DIMENSIONS: IN(X) MM()			

PH # (519) 886-6181
FAX # (519) 886-9540