

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86				
	J	REV PER ECR 08-028314	18NOV08	JR	TM

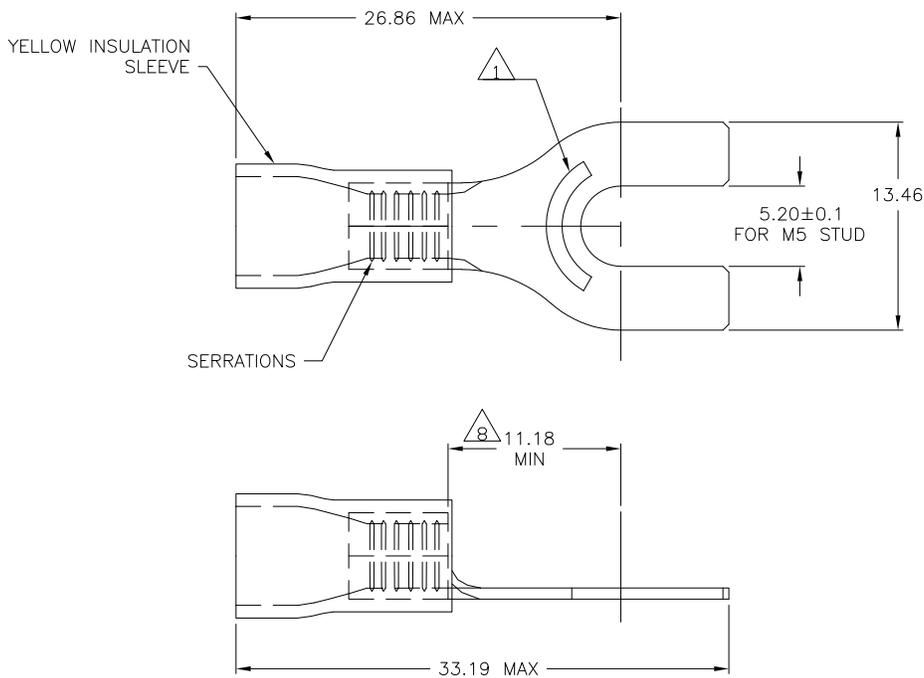

- 1 STAMP "AMP 12-10*", LOCATION APPROX AS SHOWN.
- 2 WIRE INSULATION DIA 3.8-6.4
- 3 OPERATING TEMPERATURE 90°C MAX
- 4 VOLTAGE RATING 600V MAX
- 5 CMA 2.62-6.64mm² [5,180-13,100]
- 6 MATERIAL:
BODY - COPPER PER ASTM B-152
INSULATION - PVC
- 7 FINISH:
BODY - TIN PL PER ASTM B-545
INSULATION - COLOR-YELLOW
- 8 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 9 MATERIAL THICKNESS IS 1.00 ± 0.05

165017

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16JUN2004			Tyco Electronics Corporation	
		CHK	16JUN04			Harrisburg, Pa 17105-3608	
DIMENSIONS:		T MICHELUTTI		NAME		RECTANGULAR TONGUE,	
mm		T MICHELUTTI		PRODUCT SPEC		SPADE TYPE, PLASTI-GRIP	
		APVD		APPLICATION SPEC		-	
		16JUN04		WEIGHT		-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:				SIZE		RESTRICTED TO	
0 PLC ± -				A3		-	
1 PLC ± -				CAGE CODE		-	
2 PLC ± 0.20				DRAWING NO		-	
3 PLC ± -				165017		-	
4 PLC ± -				SCALE		4:1	
ANGLES ± -				SHEET		1 OF 1	
FINISH				REV		J	
MATERIAL				CUSTOMER DRAWING			

AMP 1470-19 REV 31MAR2000