



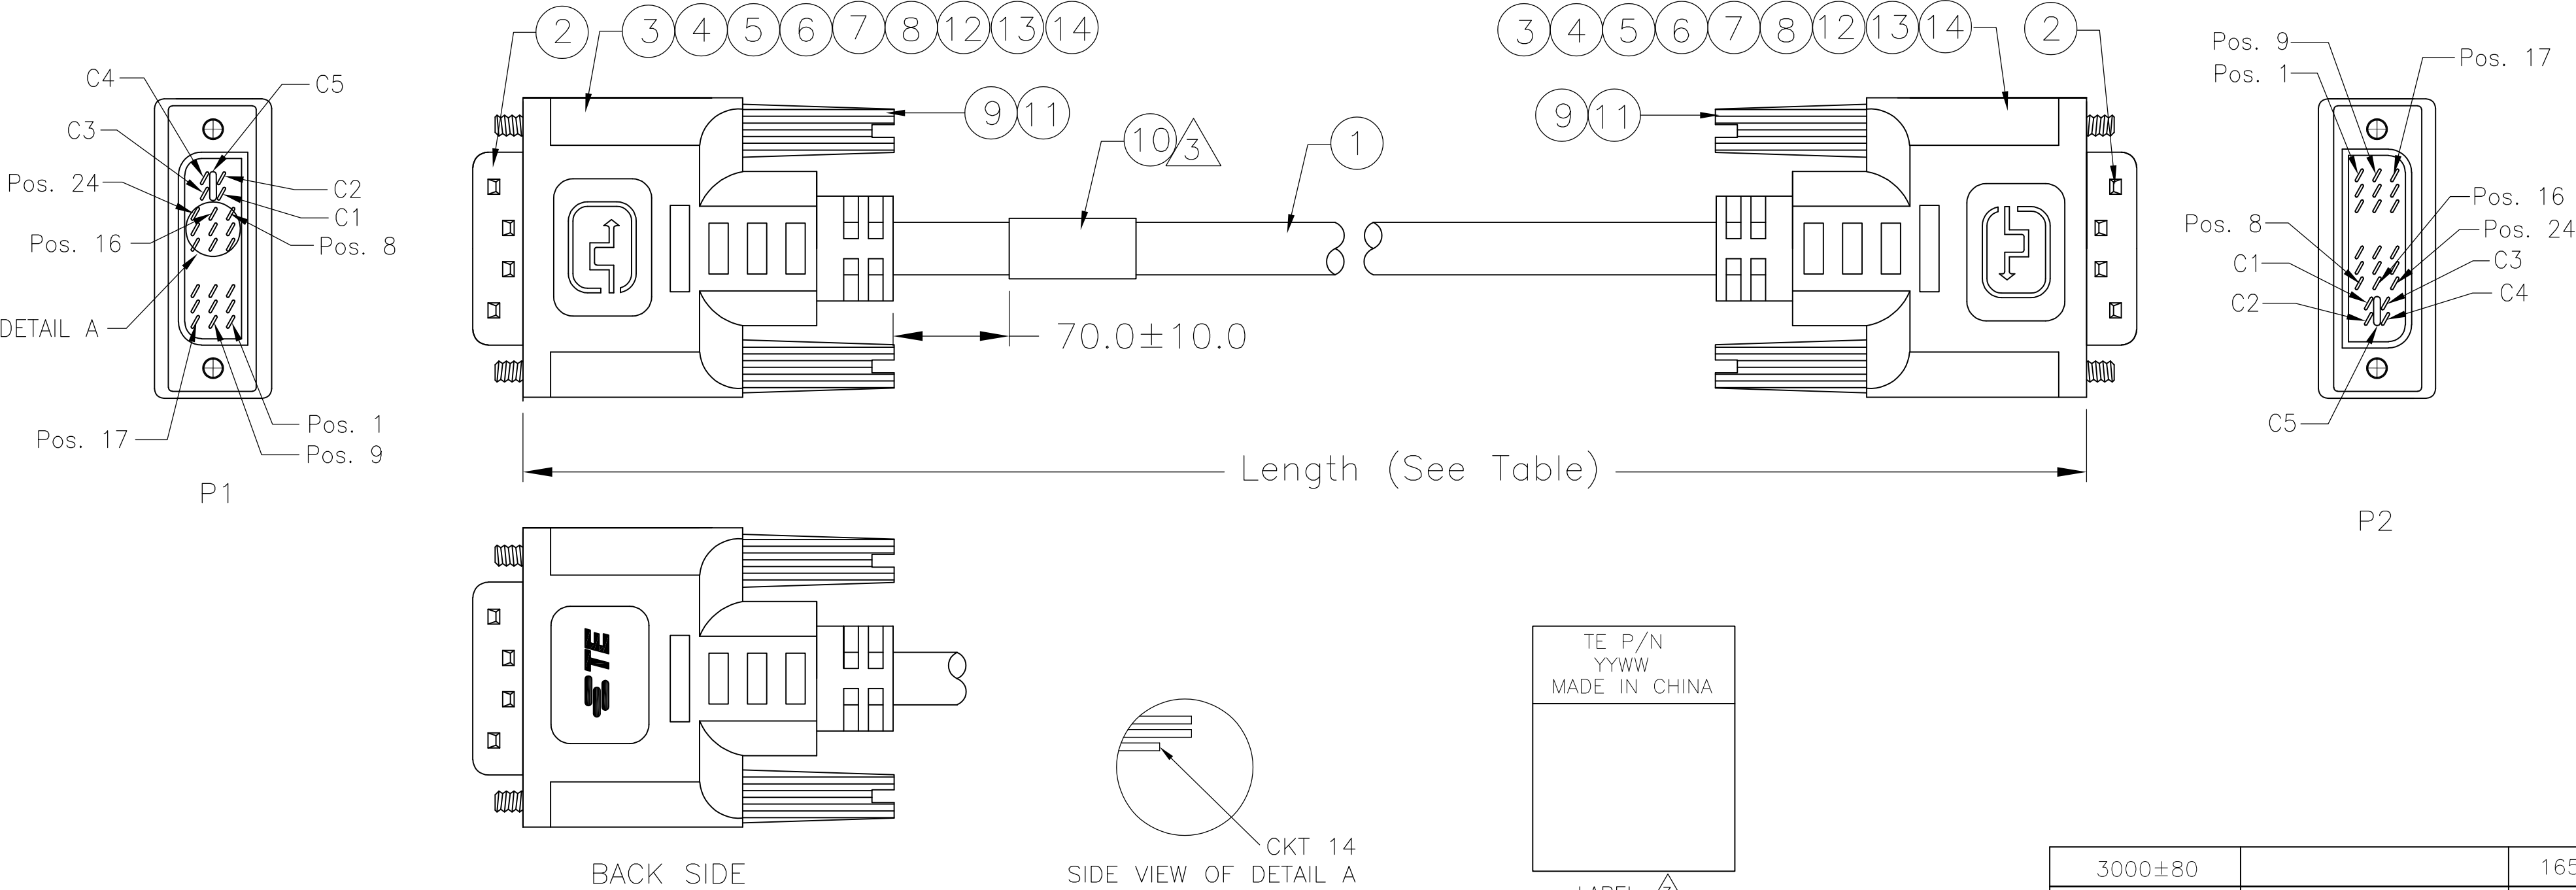

PIN ASSIGNMENT :

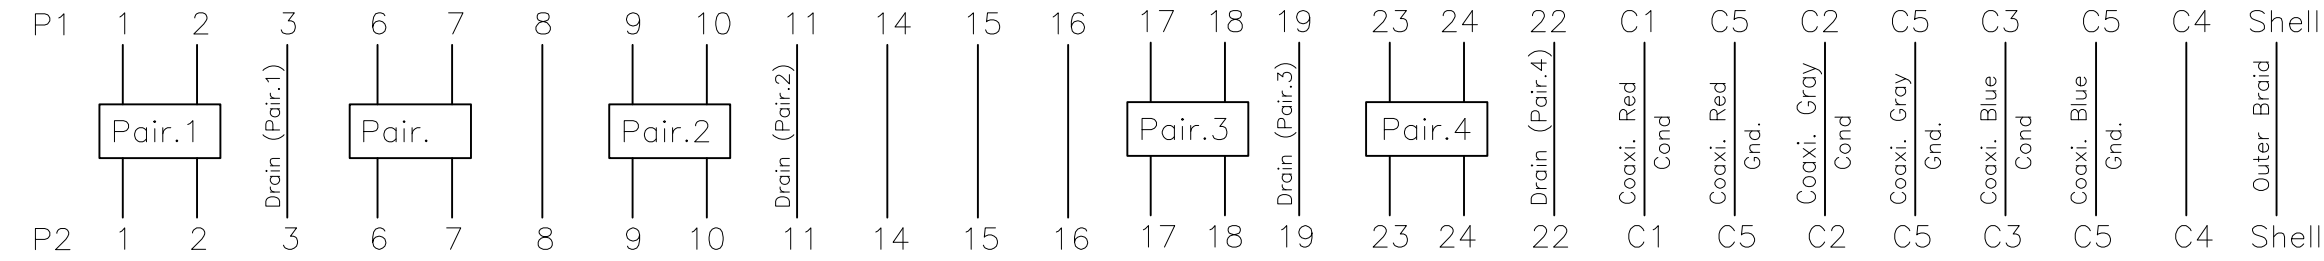

NOTES :

1. CABLE SHALL BE TESTED WITH AUTOMATED TEST EQUIPMENT FOR THE FOLLOWING:
A. CONNECTION RESISTANCE SHALL NOT EXCEED 1.8 OHMS.
B. INSULATION RESISTANCE 100M OHMS, MIN.
C. HIPOT-300 VOLTS AT 0.01 SEC.
2. CABLE ASSEMBLY MUST PASS DVI 1.0 SPECIFICATION.
3. CABLE LABEL TO BE APPLIED AS SHOWN.
4. 100% DISPLAY-SCREEN FUNCTIONAL TESTING.
5. PRODUCT AND PROCESSING MUST MEET REQUIRMENTS OF TEC-138-702.

				3000±80		1653929-3
				2000±60		1653929-2
				1000±30		1653929-1
				LENGTH(L)	CUSTOMER P/N	TE P/N
AR	AR	AR	MR	UL TAPE BLK (9mm)		14
AR	AR	AR	MR	Heat Shrink Tubing, OD: 1.5mm, Color: Black.		13
AR	AR	AR	MR	Heat Shrink Tubing, OD: 0.7mm, Color: Black.		12
AR	AR	AR	KG	PVC, Shore A 95±3, Color: White (WH01).		11
1	1	1	PC	Label, Size: 25.0*50.0, White: 25.0*13.0.		10
4	4	4	PC	DVI #4-40 3*45mm Thumbscrew.		9
AR	AR	AR	MR	Copper Foil, W:8mm.		8
AR	AR	AR	KG	PVC, Shore A 90±3, Color: White (WH01).		7
AR	AR	AR	MR	Heat Shrink Tubing, OD: 18.0mm, Color: Black.		6
AR	AR	AR	MR	Heat Shrink Tubing, OD: 2.5mm, Color: Black.		5
AR	AR	AR	MR	Heat Shrink Tubing, OD: 1.0mm, Color: Black.		4
2	2	2	PC	Metal Can For DVI Connector.		3
2	2	2	PC	DVI-I Connector, Gold 30U"Plated		2
AR	AR	AR	M1	UL20276 [30AWG*3Coax.+(28AWG*1P+Drain+Al/Mylar)*4+28AWG*1P+28AWG*6C]+Al/Mylar+Braid, Black(BK01)		1
-3	-2	-1	U/M	DESCRIPTION		ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

DWN JERRY LIU 22JAN03

CHK MONTGOMERY, JOHN D 15JUN04

APVD MONTGOMERY, JOHN D 15JUN04

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

DVI-I TO DVI-I CABLE ASSEMBLY

SIZE A2 CAGE CODE 00779 DRAWING NO C=1653929 RESTRICTED TO

SCALE N.T.S SHEET 1 OF 1 REV J

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1653929-2](#)