

# VS-25-ST-DSUB-3P-10S-LH

Order No.: 1655425



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655425>

D-SUB contact insert, shell size 3, with 10 signal contacts, for PCB assembly, angled, accommodation for 3 combined contacts, contact type pin, fixing with M3 thread and solder pins, for panel mounting frame VS-25-...

## Commercial data

|                          |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| GTIN (EAN)               | <br>4 046356 029353 |
| sales group              | D501                                                                                                 |
| Pack                     | 10 pcs.                                                                                              |
| Customs tariff           | 85369010                                                                                             |
| Catalog page information | Page 437 (PC-2011)                                                                                   |

## Product notes

WEEE/RoHS-compliant since:  
03/01/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### Mechanical characteristics

|                                 |                   |
|---------------------------------|-------------------|
| Number of positions             | 44                |
| Insertion/withdrawal cycles     | ≥ 500             |
| Connection method               | Crimp connection  |
| Ambient temperature (operation) | -55 °C ... 125 °C |

### Material data

|                                    |    |
|------------------------------------|----|
| Inflammability class acc. to UL 94 | V0 |
|------------------------------------|----|

|                          |                         |
|--------------------------|-------------------------|
| Housing material         | Steel, yellow chromated |
| Contact carrier material | Polyester GF            |

**Electrical characteristics**

|                       |      |
|-----------------------|------|
| Rated voltage (III/3) | 60 V |
| Rated surge voltage   | 1 kV |
| Rated current         | 3 A  |


**Accessories**

| Item            | Designation               | Description                                                                                                              |
|-----------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Contacts</b> |                           |                                                                                                                          |
| 1655263         | VS-BU-CD-HD-1,0/13,5/0,37 | Crimp contact, for D-SUB contact inserts with high density, socket, connection cross section AWG 22, turned, gold-plated |

**Diagrams/Drawings**

Dimensioned drawing

D-SUB contact carrier

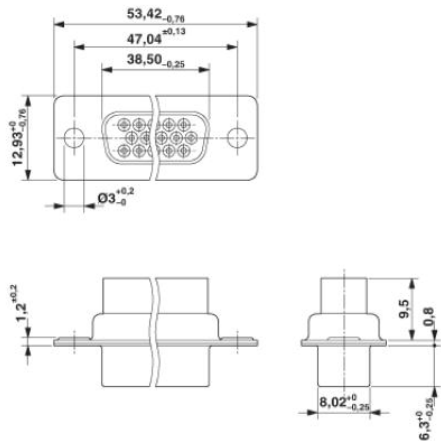

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;