


VS-09-T-20-1-S-A

Order No.: 1655661

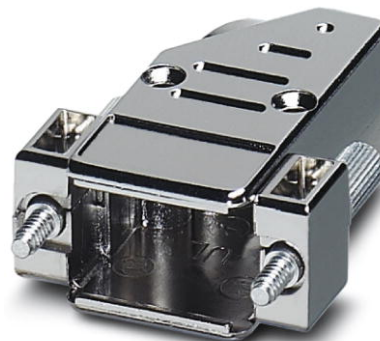

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655661>

D-SUB sleeve housing, shell size 1, shielded, IP20 degree of protection

Commercial data

GTIN (EAN)	
sales group	D500
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 327 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/12/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

External cable diameter	4 mm ... 8.5 mm
Cable exit	Angled
Color	Bare metallic
Ambient temperature (operation)	0 °C ... 70 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	ABS
Housing surface material	Metal-plated
Degree of protection	IP20

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;