

300 MHz/450 MHz/600 MHz, MCU with ARM Cortex®-R4F and -M3\*1, on-chip FPU, 498/747/996 DMIPS, up to 1 Mbyte of on-chip extended SRAM, Ethernet MAC, EtherCAT\*1, USB 2.0 high-speed, CAN, various communications interfaces such as an SPI multi-I/O bus controller,  $\Delta\Sigma$  interface, safety functions, encoder interfaces\*1, and security functions\*1

## Features

### ■ On-chip 32-bit ARM Cortex-R4F processor

- High-speed realtime control with maximum operating frequency of 300/450/600 MHz  
Capable of 498/747/996 DMIPS (in operation at 300/450/600 MHz)
- On-chip 32-bit ARM Cortex-R4F (revision r1p4)
- Tightly coupled memory (TCM) with ECC: 512 Kbytes/32 Kbytes
- Instruction cache/data cache with ECC: 8 Kbytes per cache
- High-speed interrupt
- The FPU supports addition, subtraction, multiplication, division, multiply-and-accumulate, and square-root operations at single-precision and double-precision.
- Harvard architecture with 8-stage pipeline
- Supports the memory protection unit (MPU)
- ARM CoreSight architecture, includes support for debugging through JTAG and SWD interfaces

### ■ On-chip 32-bit ARM Cortex-M3 processor (in products incorporating an R-IN engine)

- 150-MHz operating frequency
- On-chip 32-bit ARM Cortex-M3 (revision r2p1)
- RISC Harvard architecture with 3-stage pipeline
- Supports the memory protection unit (MPU)

### ■ Low power consumption

- Standby mode, sleep mode, and module stop function

### ■ On-chip extended SRAM

- Up to 1 Mbyte of the on-chip extended SRAM with ECC
- 150 MHz

### ■ Data transfer

- DMAC: 16 channels  $\times$  2 units
- DMAC for the Ethernet controller: 1 channel

### ■ Event link controller

- Module operations can be started by event signals rather than by interrupt handlers.
- Linked operation of modules is available even while the CPU is in the sleep state.

### ■ Reset and power supply voltage control

- Four reset sources including a pin reset
- Dual power-voltage configuration: 3.3 V (I/O unit), 1.2 V (internal)

### ■ Clock functions

- External clock/oscillator input frequency: 25 MHz
- CPU clock frequency: Up to 300/450/600 MHz
- Low-speed on-chip oscillator (LOCO): 240 kHz

### ■ Independent watchdog timer

- Operated by a clock signal obtained by frequency-dividing the clock signal from the low-speed on-chip oscillator: Up to 120 kHz

### ■ Safety functions


- Register write protection, input clock oscillation stop detection, CRC, IWDtA, and A/D self-diagnosis
- An error control module is incorporated to generate a pin signal output, interrupt, or internal reset in response to errors originating in the various modules.

### ■ Security functions (optional)\*2

- Boot mode with security through encryption

### ■ Encoder interfaces (optional)\*3

- EnDat 2.2 and BiSS-compliant interfaces\*4

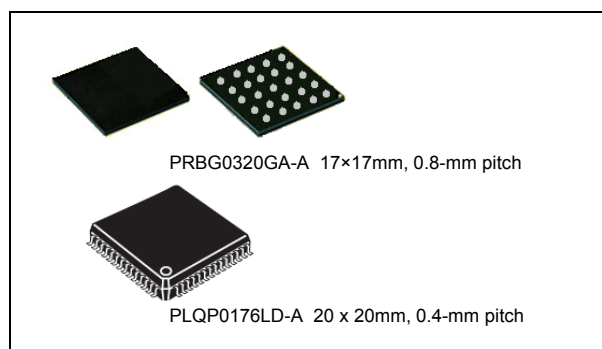

### ■ Various communications interfaces

- Ethernet
  - EtherCAT slave controller: 2 ports (optional)
  - Ether-MAC: 1 port (without the switching function) or
  - Ether-MAC: 1 port (2 ports with the switching function)
- USB 2.0 high-speed host/function : 1 channel
- CAN (compliant with ISO11898-1): 2 channels (max.)
- SCIFA with 16-byte transmission and reception FIFOs: 5 channels
- I<sup>2</sup>C bus interface: 2 channels for transfer at up to 400 kbps
- RSPIa: 4 channels
- SPIBSC: Provides a single interface for multi-I/O compatible serial flash memory

### ■ External address space

- Buses for high-speed data transfer at 75 MHz (max.)
- Support for up to 6 CS areas
- 8-, 16-, or 32-bit bus space is selectable per area

### ■ Up to 33 extended-function timers

- 16-bit TPUa (12 channels), MTU3a (9 channels), GPTa (4 channels): Input capture, output compare, PWM waveform output
- 16-bit CMT (6 channels), 32-bit CMTW (2 channels)

### ■ Serial sound interface (1 channel)

### ■ $\Delta\Sigma$ interface

- Up to 4  $\Delta\Sigma$  modulators are connectable externally.

### ■ 12-bit A/D converters

- 12 bits  $\times$  2 units (max.)  
(8 channels for unit 0; 16 channels for unit 1)
- Self diagnosis
- Detection of analog input disconnection

### ■ Temperature sensor for measuring temperature within the chip

### ■ General-purpose I/O ports

- 5-V tolerance, open drain, input pull-up

### ■ Multi-function pin controller

- The locations of input/output functions for peripheral modules are selectable from among multiple pins.

### ■ Operating temperature range

- T<sub>j</sub> = -40°C to +125°C  
T<sub>j</sub>: Junction temperature

Note 1. Optional

Note 2. Details of these optional functions will only be disclosed after completion of a binding non-disclosure agreement. For details, contact our sales representative.

Note 3. For details, contact our sales representative.

Note 4. BiSS is a registered trademark of iC-Haus GmbH.

## 1. Overview

### 1.1 Outline of Specifications

This LSI circuit is a high-performance MCU equipped with the ARM Cortex®-R4F processor and Cortex-M3 (for products incorporating an R-IN engine) processors, and incorporating integrated peripheral functions necessary for system configuration. Table 1.1 lists the specifications in outline, and Table 1.2 gives a comparison of the functions of products in different packages.

Table 1.1 shows the outline of maximum specifications, and the number of peripheral module channels differs depending on the pin number on the package. For details, see Table 1.2, Comparison of Functions for Different Packages.

**Table 1.1 Outline of Specifications (1 / 7)**

| Classification  | Module/Function                                                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU             | Central processing unit (Cortex-R4F)                                               | <ul style="list-style-type: none"> <li>Maximum operating frequency<br/>320-pin FBGA: 300 MHz/450 MHz/600 MHz<br/>176-pin HLQFP: 450 MHz</li> <li>32-bit CPU Cortex-R4F designed by ARM (core revision r1p4)</li> <li>Address space: 4 Gbytes</li> <li>Instruction cache: 8 Kbytes (with ECC)</li> <li>Data cache: 8 Kbytes (with ECC)</li> <li>Tightly coupled memory (TCM)<br/>ATCM: 512 Kbytes (with ECC)<br/>BTCM: 32 Kbytes (with ECC)</li> <li>Instruction set: ARMv7-R architecture, so support includes Thumb and Thumb-2</li> <li>Data arrangement<br/>Instructions: Little endian<br/>Data: Little endian</li> <li>Memory protection unit (MPU)</li> </ul> |
|                 | Central processing unit (Cortex-M3)<br>(for products incorporating an R-IN engine) | <ul style="list-style-type: none"> <li>Operating frequency: 150 MHz</li> <li>32-bit CPU Cortex-M3 designed by ARM (core revision r2p1)</li> <li>Address space: 4 Gbytes</li> <li>Instruction set: ARMv7-R architecture, so support includes Thumb® and Thumb-2</li> <li>Data arrangement<br/>Instructions: Little endian<br/>Data: Little endian</li> <li>Memory protection unit (MPU)</li> </ul>                                                                                                                                                                                                                                                                   |
|                 | FPU (Cortex-R4F)                                                                   | <ul style="list-style-type: none"> <li>Supports addition, subtraction, multiplication, division, multiply-and-accumulate, and square-root operations at single- and double-precision.</li> <li>Registers<br/>32-bit single-word registers: 32 bits × 32<br/>(can be used as 16 double-word registers: 64 bits × 16)</li> </ul>                                                                                                                                                                                                                                                                                                                                      |
| Memory          | On-chip extended SRAM with ECC                                                     | <ul style="list-style-type: none"> <li>Capacity: Up to 1 Mbyte</li> <li>150 MHz</li> <li>SEC-DED (single error correction/double error detection)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Operating modes |                                                                                    | <ul style="list-style-type: none"> <li>Three boot modes<br/>SPI boot mode (for booting up from serial flash memory)<br/>16-bit bus boot mode (NOR Flash)<br/>32-bit bus boot mode (NOR Flash)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Clock           | Clock generation circuit                                                           | <ul style="list-style-type: none"> <li>The input clock can be selected from an external clock signal or external resonator.</li> <li>Detection of input clock oscillation stopping</li> <li>The following clocks are generated.<br/>CPU clock: 300/450/600 MHz (max.)<br/>System clock: 150 MHz (fixed)<br/>High-speed peripheral module clock: 150 MHz (fixed)<br/>Low-speed peripheral module clock: 75 MHz (fixed)<br/>ADCClk in the 12-bit A/D converter (S12ADCa): 60 MHz (max.)<br/>External bus clock: 75 MHz (max.)<br/>Low-speed on-chip oscillator: 240 kHz (fixed)</li> </ul>                                                                            |
| Reset           |                                                                                    | RES # pin reset, error control module (ECM) reset, software reset                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 1.1 Outline of Specifications (2 / 7)**

| Classification                      | Module/Function                                                                                                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low power                           | Low power consumption                                                                                             | <ul style="list-style-type: none"> <li>Standby mode (Cortex-R4F)</li> <li>Sleep mode (Cortex-M3) (for products incorporating an R-IN engine)</li> <li>Module stop function</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Interrupt                           | Cortex-R4F vector interrupt controller (VIC)                                                                      | <ul style="list-style-type: none"> <li>Peripheral function interrupts: 273 sources / 276 sources (for products incorporating an R-IN engine)</li> <li>External interrupts: 20 sources (NMI, IRQ0 to IRQ15, ETH0_INT, ETH1_INT, and ETH2_INT pins)</li> <li>Software interrupts: 1 source</li> <li>Non-maskable interrupts: 2 sources</li> <li>Sixteen levels specifiable for the order of priority</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                     | Cortex-M3 nested-type vector interrupt controller (NVIC) (only included in products incorporating an R-IN engine) | <ul style="list-style-type: none"> <li>Peripheral function interrupts: 82 sources</li> <li>External interrupts: 19 sources (IRQ0 to IRQ15, ETH0_INT, ETH1_INT, and ETH2_INT pins)</li> <li>Software interrupts: 1 source</li> <li>Non-maskable interrupts: 1 source</li> <li>Sixteen levels specifiable for the order of priority</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| External bus extension              | Bus state controller (BSC)                                                                                        | <ul style="list-style-type: none"> <li>The external address space is divided into six areas (CS0 to CS5) for management.</li> <li>The following features settable for each area independently.<br/>Bus size (8, 16, or 32 bits): Available sizes depend on the area.<br/>Number of access wait cycles (different wait cycles can be specified for read and write access cycles in some areas)<br/>Idle wait cycle insertion (between same area access cycles or different area access cycles)<br/>Specifying the memory to be connected to each area enables direct connection to SRAM, SRAM with byte selection, SDRAM, and burst ROM (clocked synchronous or asynchronous). The address/data multiplexed I/O (MPX) interface is also available.</li> <li>Outputs a chip select signal (CS0# to CS5#) according to the target area (CS assert or negate timing can be selected by software)</li> <li>SDRAM refresh<br/>Auto refresh or self-refresh mode selectable</li> <li>SDRAM burst access</li> </ul> |
| Data transfer                       | Direct memory access controller (DMAC)                                                                            | <ul style="list-style-type: none"> <li>2 units (16 channels for unit 0, 16 channels for unit 1)</li> <li>Transfer modes: Single transfer mode and block transfer mode</li> <li>Transfer size<br/>Unit 0: 1/2/4/16/32/64 bytes<br/>Unit 1: 1/2/4/16 bytes</li> <li>Activation sources: Software trigger, external DMA requests (DREQ0 to DREQ2), external interrupts, and interrupt requests from peripheral functions</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| I/O ports                           | General-purpose I/O ports                                                                                         | <ul style="list-style-type: none"> <li>320-pin FBGA<br/>I/O pins: 209<br/>Input pins: 9<br/>Pull-up/pull-down resistors: 209<br/>5-V tolerance: 9</li> <li>176-pin HLQFP<br/>I/O pins: 97<br/>Input pins: 5<br/>Pull-up/pull-down resistors: 97<br/>5-V tolerance: 5</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Event link controller (ELC)         |                                                                                                                   | <ul style="list-style-type: none"> <li>87 event signals can be interlinked with the operation of modules.</li> <li>In particular, the operation of timer modules can be started by input event signals.</li> <li>Event-linked operation of signals of ports B and E is to be possible.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Multi-function pin controller (MPC) |                                                                                                                   | The locations of input/output functions are selectable from among multiple pins.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**Table 1.1 Outline of Specifications (3 / 7)**

| Classification | Module/Function                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timers         | 16-bit timer pulse unit (TPUa)         | <ul style="list-style-type: none"> <li>• (16 bits × 6 channels) × 2 units*1</li> <li>• Maximum of 32 pulse-input/output possible</li> <li>• Select from among seven or eight counter-input clock signals for each channel (with maximum operating frequency of 75 MHz)</li> <li>• Input capture/output compare function</li> <li>• Counter clear operation (synchronous clearing by compare match/input capture)</li> <li>• Simultaneous writing to multiple timer counters (TCNT)</li> <li>• Simultaneous register input/output by synchronous counter operation</li> <li>• Output of PWM waveforms in up to 30 phases in PWM mode</li> <li>• Support for buffered operation, phase-counting mode (two phase encoder input) and cascade-connected operation (32 bits × 4 channels) depending on the channel.</li> <li>• PPG output trigger can be generated</li> <li>• Capable of generating conversion start triggers for the A/D converters</li> <li>• Digital noise filtering of signals from the input capture pins</li> <li>• Event linking by the ELC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                | Multifunction timer pulse unit (MTU3a) | <ul style="list-style-type: none"> <li>• 9 channels (16 bits × 8 channels, 32 bits × 1 channel)</li> <li>• Maximum of 28 pulse-input/output and 3 pulse-input possible</li> <li>• Select from among 9, 11, or 12 counter-input clock signals for each channel (with maximum operating frequency of 150 MHz)</li> <li>• Input capture function</li> <li>• 39 output compare/input capture registers</li> <li>• Counter clear operation (synchronous clearing by compare match/input capture)</li> <li>• Simultaneous writing to multiple timer counters (TCNT)</li> <li>• Simultaneous register input/output by synchronous counter operation</li> <li>• Buffered operation</li> <li>• Support for cascade-connected operation</li> <li>• Automatic transfer of register data</li> <li>• Pulse output mode <ul style="list-style-type: none"> <li>• Toggle/PWM/complementary PWM/reset-synchronized PWM</li> </ul> </li> <li>• Complementary PWM output mode <ul style="list-style-type: none"> <li>• Outputs non-overlapping waveforms for controlling 3-phase inverters</li> <li>• Automatic specification of dead times</li> <li>• PWM duty cycle: Selectable as any value from 0% to 100%</li> <li>• Delay can be applied to requests for A/D conversion.</li> <li>• Non-generation of interrupt requests at peak or trough values of counters can be selected.</li> <li>• Double buffer configuration</li> </ul> </li> <li>• Reset synchronous PWM mode <ul style="list-style-type: none"> <li>• Three phases of positive and negative PWM waveforms can be output with desired duty cycles.</li> </ul> </li> <li>• Phase-counting mode: 16-bit mode (channels 1 and 2); 32-bit mode (channels 1 and 2)</li> <li>• Counter functionality for dead-time compensation</li> <li>• Generation of triggers for A/D converter conversion</li> <li>• A/D converter start triggers can be skipped</li> <li>• Digital noise filter function for signals on the input capture and external counter clock pins</li> <li>• PPG output trigger can be generated</li> <li>• Event linking by the ELC</li> </ul> |

**Table 1.1 Outline of Specifications (4 / 7)**

| Classification | Module/Function                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timers         | General PWM timer (GPTa)           | <ul style="list-style-type: none"> <li>• 16 bits × 4 channels</li> <li>• Counting up or down (saw-wave), counting up and down (triangle-wave) selectable for all channels</li> <li>• Select from among four counter-input clock signals for each channel (with maximum operating frequency of 150 MHz)</li> <li>• 2 input/output pins per channel</li> <li>• 2 output compare/input capture registers per channel</li> <li>• For the 2 output compare/input capture registers of each channel, 4 registers are provided as buffer registers and are capable of operating as comparison registers when buffering is not in use.</li> <li>• In output compare operation, buffer switching can be at peaks or troughs, enabling the generation of laterally asymmetrically PWM waveforms.</li> <li>• Registers for setting up frame intervals on each channel (with capability for generating interrupts on overflow or underflow)</li> <li>• Synchronizable operation of the several counters</li> <li>• Modes of synchronized operation (synchronized, or displaced by desired times for phase shifting)</li> <li>• Generation of dead times in PWM operation</li> <li>• Through combination of three counters, generation of automatic three-phase PWM waveforms incorporating dead times</li> <li>• Starting, clearing, and stopping counters in response to external or internal triggers</li> <li>• Internal trigger sources: software, and compare-match</li> <li>• Generation of triggers for A/D converter conversion</li> <li>• Digital noise filter function for signals on the input capture and external trigger pins</li> <li>• Event linking by the ELC</li> </ul> |
|                | Programmable pulse generator (PPG) | <ul style="list-style-type: none"> <li>• (4 bits × 4 groups) × 2 units*1</li> <li>• Pulse output with the MTU3a or TPUa output as a trigger</li> <li>• Maximum of 32 pulse-output possible</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                | Compare match timer (CMT)          | <ul style="list-style-type: none"> <li>• (16 bits × 2 channels) × 3 units</li> <li>• Select from among four counter-input clock signals for each channel (with maximum operating frequency of 75 MHz)</li> <li>• Event linking by the ELC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                | Compare match timer W (CMTW)       | <ul style="list-style-type: none"> <li>• (32 bits × 1 channel) × 2 units</li> <li>• Compare-match, input-capture input, and output-comparison output are available.</li> <li>• Select from among four counter-input clock signals for each channel (with maximum operating frequency of 75 MHz)</li> <li>• Interrupt requests can be output in response to compare-match, input-capture, and output-comparison events.</li> <li>• Digital noise filter function for signals on the input capture pins</li> <li>• Event linking by the ELC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                | Watchdog timer (WDTa)              | <ul style="list-style-type: none"> <li>• 14 bits × 1 channel</li> <li>• Products incorporating an R-IN engine: 14 bits × 2 channels</li> <li>• Select from among six counter-input clock signals for each channel (with maximum operating frequency of 75 MHz)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                | Independent watchdog timer (IWDTa) | <ul style="list-style-type: none"> <li>• 14 bits × 1 channel</li> <li>• Counter-input clock: Low-speed on-chip oscillator (LOCO)/2</li> <li>• Dedicated clock/1, dedicated clock/16, dedicated clock/32, dedicated clock/64, dedicated clock/128, dedicated clock/256 (with maximum operating frequency of 120 MHz)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                | Port output enable 3 (POE3)        | <ul style="list-style-type: none"> <li>• Control of the high-impedance state of the MTU3a / GPTa's waveform output pins</li> <li>• 4 pins for input from signal sources: POE0, POE4, POE8, POE10</li> <li>• Initiation on detection of short-circuited outputs (detection of simultaneous PWM output to the active level)</li> <li>• Initiation by input clock oscillation-stoppage detection, PLL oscillation anomaly detection, or software</li> <li>• Additional programming of output control target pins is enabled</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**Table 1.1 Outline of Specifications (5 / 7)**

| Classification         | Module/Function                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Communication function | Ethernet MAC (ETHERC)                            | <ul style="list-style-type: none"> <li>• 1 Port</li> <li>• IEEE802.3 is supported</li> <li>• 10BASE and 100BASE are supported</li> <li>• Full duplex and half duplex are supported</li> <li>• Automatic pause packet transmission function</li> <li>• Auto broadcast suspension function by the pause packet reception</li> <li>• MII/RMII interface is supported</li> </ul>                                                                                                                                                                                                                                                                                                                        |
|                        | Ethernet switch                                  | <ul style="list-style-type: none"> <li>• 2-port PHY interfaces</li> <li>• IEEE802.3</li> <li>• 10BASE, 100BASE</li> <li>• Full and half duplex</li> <li>• Hardware switching, lookup, and filtering</li> <li>• QoS with frame prioritization</li> <li>• Priority control based on VLAN Priority (IEEE802.1q), which enables priority reassignment</li> <li>• Classification and priority assignment based on IPv4 DiffServ Code Point Field, IPv6 Class of Service</li> <li>• Queue with four priority levels</li> <li>• Multicasting and broadcasting</li> <li>• VLAN frame</li> <li>• IEEE1588 timer module</li> <li>• Cut-through and hub features</li> <li>• Device level ring (DLR)</li> </ul> |
|                        | EtherCAT Slave Controller (ECATC) *2             | <ul style="list-style-type: none"> <li>• 1 channel (2 ports) *3</li> <li>• EtherCAT Slave Controller IP core (made by Beckhoff Automation GmbH) implemented</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                        | USB 2.0 HS host/function module                  | <ul style="list-style-type: none"> <li>• 1 port</li> <li>• Compliance with the USB 2.0 specification</li> <li>• Transfer rate<br/>High speed (480 Mbps), full speed (12 Mbps)</li> <li>• Communications buffer<br/>Incorporates 1 Kbyte of RAM for host mode<br/>Incorporates 8 Kbytes of RAM for function mode</li> </ul>                                                                                                                                                                                                                                                                                                                                                                          |
|                        | Serial communication interface with FIFO (SCIFA) | <ul style="list-style-type: none"> <li>• 5 channels</li> <li>• Serial communications modes: Asynchronous, clock synchronous</li> <li>• On-chip baud rate generator allows selection of the desired bit rate</li> <li>• Choice of LSB-first or MSB-first transfer</li> <li>• Both the transmission and reception sections are equipped with 16-byte FIFO buffers, allowing continuous transmission and reception.</li> <li>• Bit rate modulation</li> </ul>                                                                                                                                                                                                                                          |
|                        | I <sup>2</sup> C bus interface (RIICa)           | <ul style="list-style-type: none"> <li>• 2 channels</li> <li>• I<sup>2</sup>C bus format</li> <li>• Supports the multi-master</li> <li>• Max. transfer rate: 400 kbps</li> <li>• Event linking by the ELC</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                        | CAN module (RSCAN)                               | <ul style="list-style-type: none"> <li>• 2 channels</li> <li>• Compliance with the ISO11898-1 specification (standard frame and extended frame)</li> <li>• Message buffers<br/>Max. 64 x 2 channels of receive message buffers, which are used by all channels<br/>16 transmit message buffers per channel</li> <li>• Max. transfer rate: 1 Mbps</li> </ul>                                                                                                                                                                                                                                                                                                                                         |
|                        |                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Table 1.1 Outline of Specifications (6 / 7)**

| Classification                   | Module/Function                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Communication function           | Serial peripheral interface (RSPIa)   | <ul style="list-style-type: none"> <li>• 4 channels</li> <li>• RSPI transfer facility<br/>Using the MOSI (master out slave in), MISO (master in slave out), SSL (slave select), and RSPCK (RSPI clock) signals enables serial transfer through SPI operation (four lines) or clock-synchronous operation (three lines)<br/>Capable of handling serial transfer as a master or slave</li> <li>• Data formats<br/>Switching between MSB first and LSB first<br/>The number of bits in each transfer can be changed to any number of bits from 8 to 16, or 20, 24, or 32 bits.<br/>128-bit buffers for transmission and reception<br/>Up to four frames can be transmitted or received in a single transfer operation (with each frame having up to 32 bits)</li> <li>• Buffered structure<br/>Double buffers for both transmission and reception</li> <li>• RSPCK can be stopped automatically with the receive buffer full for master reception</li> <li>• Event linking by the ELC</li> </ul>                                                                                                                                                                                                                                                  |
|                                  | SPI multi I/O bus controller (SPIBSC) | <ul style="list-style-type: none"> <li>• 1 channel</li> <li>• One serial flash memory with multiple I/O bus sizes (single/dual/quad) can be connected.</li> <li>• External address space read mode (built-in read cache)</li> <li>• SPI operating mode</li> <li>• Clock polarity and clock phase can be selected.</li> <li>• Maximum transfer rate: 300 Mbps (for quad)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Serial sound interface (SSI)     |                                       | <ul style="list-style-type: none"> <li>• 1 channel</li> <li>• Duplex communication</li> <li>• Support of various serial audio formats</li> <li>• Support of master and slave functions</li> <li>• Generation of programmable word clock and bit clock</li> <li>• Support of 8, 16, 18, 20, 22, 24, and 32-bit data formats</li> <li>• Support of eight-stage FIFO for transmission and reception</li> <li>• Support of WS continue mode in which the SSIWS signal is not stopped.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| $\Delta\Sigma$ interface (DSMIF) |                                       | <ul style="list-style-type: none"> <li>• 4 channels</li> <li>• Up to 4 <math>\Delta\Sigma</math> modulators are externally connectable</li> <li>• Sync filter can be selected as first, second or third order</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 12-bit A/D converter (S12ADCa)   |                                       | <ul style="list-style-type: none"> <li>• 12 bits <math>\times</math> 2 units (unit 0: 8 channels, unit 1: 16 channels)*1</li> <li>• 12-bit resolution</li> <li>• Conversion time<br/>Unit 0: 0.483 <math>\mu</math>s per channel<br/>Unit 1: 0.883 <math>\mu</math>s per channel</li> <li>• Operating mode<br/>Scan mode (single scan mode, continuous scan mode, or group scan mode)<br/>Group A priority control (only for group scan mode)</li> <li>• Sample-and-hold function<br/>Common sample-and-hold circuit included<br/>In addition, channel-dedicated sample-and-hold function (4 channels: in unit 0 only) included</li> <li>• Sampling variable<br/>Sampling time can be set up for each channel</li> <li>• Self-diagnostic function<br/>The self-diagnostic function internally generates three analog input voltages (unit 0: VREFL0, VREFH0 <math>\times</math> 1/2, VREFH0; unit 1: VREFL1, VREFH1 <math>\times</math> 1/2, VREFH1)</li> <li>• Double trigger mode (A/D conversion data duplicated)</li> <li>• Detection of analog input disconnection</li> <li>• Three ways to start A/D conversion<br/>Software trigger, timer (MTU3a, GPTa, TPUa) trigger, external trigger</li> <li>• Event linking by the ELC</li> </ul> |
| Temperature sensor               |                                       | <ul style="list-style-type: none"> <li>• 1 channel</li> <li>• Relative precision: <math>\pm 1^\circ\text{C}</math></li> <li>• The voltage of the temperature is converted into a digital value by the 12-bit A/D converter (unit 0).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

**Table 1.1 Outline of Specifications (7 / 7)**

| Classification        | Module/Function                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety                | Register write protection function    | Protects important registers from being overwritten for in case a program runs out of control.                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                       | CRC calculator (CRC)                  | <ul style="list-style-type: none"> <li>• CRC code generation for arbitrary amounts of data in 8-, 16-, or 32-bit units</li> <li>• Select any of four generating polynomials:<br/> <math>X^{32} + X^{26} + X^{23} + X^{22} + X^{16} + X^{12} + X^{11} + X^{10} + X^8 + X^7 + X^5 + X^4 + X^2 + X + 1</math> (32-Ethernet),<br/> <math>X^{16} + X^{12} + X^5 + 1</math> (16-CCITT),<br/> <math>X^8 + X^4 + X^3 + X^2 + 1</math> (8-SAEJ1850),<br/> <math>X^8 + X^5 + X^3 + X^2 + X + 1</math> (8-0x2F)</li> </ul> |
|                       | Input clock oscillation stop function | Input clock oscillation stop detection: Available                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       | Clock monitor circuit (CLMA)          | Monitors the abnormal output clock frequency from the PLL circuit or low-speed on-chip oscillator.                                                                                                                                                                                                                                                                                                                                                                                                              |
|                       | Data operation circuit (DOC)          | The function to compare, add, or subtract 16-bit data                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                       | Error control module (ECM)            | <ul style="list-style-type: none"> <li>• Generates an interrupt, internal reset, or error output for the error signal input from each module.</li> <li>• Time-out function</li> <li>• The error control is duplicated in the master and the checker.</li> </ul>                                                                                                                                                                                                                                                 |
| Security              | Secure boot mode*4                    | As an option, a boot mode with encryption as a security function is available.                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Encoder interfaces*5  |                                       | EnDat 2.2 and BiSS-compliant interfaces                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power supply voltage  |                                       | VDD = PLLVDD0 = PLLVDD1 = DVDD_USB = 1.14 to 1.26 V<br>VCCQ33 = AVCC0 = AVCC1 = VREFH0 = VREFH1 = VDD33_USB = 3.0 to 3.6 V                                                                                                                                                                                                                                                                                                                                                                                      |
| Operating temperature |                                       | Tj = -40 to +125°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Package               |                                       | 320-pin FBGA: 17 × 17 mm, 0.8-mm pitch PRBG0320GA-A<br>176-pin HLQFP: 20 × 20 mm, 0.4-mm pitch PLQP0176LD-A                                                                                                                                                                                                                                                                                                                                                                                                     |
| Debugging interface   |                                       | <ul style="list-style-type: none"> <li>• CoreSight architecture designed by ARM</li> <li>• Debugging function by the JTAG/SWD interface, and trace function by the trace port/SWV interface</li> </ul>                                                                                                                                                                                                                                                                                                          |

Note 1. One unit for 176-pin devices (only unit 0 is provided)

Note 2. EtherCAT is a registered trademark of Beckhoff Automation GmbH, Germany. (optional)

Note 3. Not included in 176-pin devices.

Note 4. See Table 1.3, List of Products, for the products that have the secure boot mode. Details of these optional functions will only be disclosed after completion of a binding non-disclosure agreement. For details, contact our sales representative.

Note 5. This applies to the devices with the encoder interfaces. For details, contact our sales representative.

**Table 1.2 Comparison of Functions for Different Packages**

| Module/Function                |                                                   | RZ/T1 Group                                        |                              |                                        |
|--------------------------------|---------------------------------------------------|----------------------------------------------------|------------------------------|----------------------------------------|
|                                |                                                   | 320 Pins                                           |                              | 176 Pins                               |
|                                |                                                   | R-IN Engine Incorporated                           | R-IN Engine Not-Incorporated |                                        |
| External bus                   | External bus width                                | 32 bits                                            |                              |                                        |
| Interrupt                      | External interrupt                                | NMI, IRQ0 to IRQ15, ETH0_INT, ETH1_INT, ETH2_INT   |                              | NMI, IRQ0 to IRQ15, ETH0_INT, ETH1_INT |
| DMA                            | DMA controller (DMAC)                             | ch0 to ch31                                        |                              |                                        |
| Timers                         | 16-bit timer pulse unit (TPUa)                    | ch0 to ch11 (Unit 0, Unit 1)                       |                              | ch0 to ch5 (Unit 0)                    |
|                                | Multi-function timer pulse unit 3 (MTU3a)         | ch0 to ch8                                         |                              |                                        |
|                                | General-purpose PWM timer (GPTa)                  | ch0 to ch3                                         |                              |                                        |
|                                | Port output enable 3 (POE3)                       | Available                                          |                              |                                        |
|                                | Programmable pulse generator (PPG)                | Unit 0, Unit 1                                     |                              | Unit 0                                 |
|                                | Compare match timer (CMT)                         | ch0 to ch5                                         |                              |                                        |
|                                | Compare match timer W (CMTW)                      | ch0, ch1                                           |                              |                                        |
|                                | Watchdog timer (WDTA)                             | ch0, 1                                             | ch0                          |                                        |
|                                | Independent watchdog timer (IWDTa)                | Available                                          |                              |                                        |
| Communication function         | Ethernet controller (ETHERC)                      | 3 ports                                            |                              | 2 port                                 |
|                                | EtherCAT slave controller (ECATC)                 | Available                                          | Optional                     | Not supported                          |
|                                | USB 2.0 HS host/function module (USB)             | ch0                                                |                              |                                        |
|                                | Serial communications interface with FIFO (SCIFA) | ch0 to ch4                                         |                              |                                        |
|                                | I <sup>2</sup> C bus interface (RIICa)            | ch0, ch1                                           |                              |                                        |
|                                | Serial peripheral interface (RSPIa)               | ch0 to ch3                                         |                              |                                        |
|                                | CAN module (RSCAN)                                | ch0, 1                                             |                              |                                        |
|                                | SPI multi I/O bus controller (SPIBSC)             | ch0                                                |                              |                                        |
| Serial sound interface (SSI)   |                                                   | ch0                                                |                              |                                        |
| ΔΣ interface (DSMIF)           |                                                   | ch0 to ch3                                         |                              |                                        |
| 12-bit A/D converter (S12ADCa) |                                                   | AN000 to AN007 (unit 0)<br>AN100 to AN115 (unit 1) |                              | AN000 to AN007 (unit 0)                |
| Temperature sensor             |                                                   | Available                                          |                              |                                        |
| CRC calculator (CRC)           |                                                   | Available                                          |                              |                                        |
| Data operation circuit (DOC)   |                                                   | Available                                          |                              |                                        |
| Clock monitor circuit (CLMA)   |                                                   | Available                                          |                              |                                        |
| Secure boot mode*1             |                                                   | Optional                                           |                              |                                        |
| Event link controller (ELC)    |                                                   | Available                                          |                              |                                        |
| Encoder interfaces*2           |                                                   | Optional                                           |                              | Not supported                          |

Note 1. See Table 1.3, List of Products for the products that have the secure boot mode. Details of these optional functions will only be disclosed after completion of a binding non-disclosure agreement. For details, contact our sales representative.

Note 2. For details, contact our sales representative.

## 1.2 List of Products

Table 1.3 is a list of products.

**Table 1.3 List of Products (1 / 2)**

| Part No.     | Package                        | CPU        | On-Chip<br>Extended<br>SRAM<br>Capacity | EtherCAT         | Operating<br>Frequency<br>(max.) | Security<br>Function<br>*1 | Optional<br>Function                            |
|--------------|--------------------------------|------------|-----------------------------------------|------------------|----------------------------------|----------------------------|-------------------------------------------------|
| R7S910001CFP | 176 pins<br>(PLQP0176L<br>D-A) | Cortex-R4F | Not<br>supported                        | Not<br>supported | 450MHz                           | Not<br>supported           | —                                               |
| R7S910101CFP | 176 pins<br>(PLQP0176L<br>D-A) | Cortex-R4F | Not<br>supported                        | Not<br>supported | 450MHz                           | Available                  | —                                               |
| R7S910002CBG | 320 pins<br>(PRBG0320<br>GA-A) | Cortex-R4F | Not<br>supported                        | Not<br>supported | 450MHz                           | Not<br>supported           | —                                               |
| R7S910102CBG | 320 pins<br>(PRBG0320<br>GA-A) | Cortex-R4F | Not<br>supported                        | Not<br>supported | 450MHz                           | Available                  | —                                               |
| R7S910006CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | 1 Mbyte                                 | Not<br>supported | 450MHz                           | Not<br>supported           | —                                               |
| R7S910106CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | 1 Mbyte                                 | Not<br>supported | 450MHz                           | Available                  | —                                               |
| R7S910007CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | 1 Mbyte                                 | Not<br>supported | 600MHz                           | Not<br>supported           | —                                               |
| R7S910107CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | 1 Mbyte                                 | Not<br>supported | 600MHz                           | Available                  | —                                               |
| R7S910011CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | Not<br>supported                        | Not<br>supported | 450MHz                           | Not<br>supported           | Encoder I/F                                     |
| R7S910111CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | Not<br>supported                        | Not<br>supported | 450MHz                           | Available                  | Encoder I/F                                     |
| R7S910013CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | 1 Mbyte                                 | Not<br>supported | 600MHz                           | Not<br>supported           | Encoder I/F                                     |
| R7S910113CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | 1 Mbyte                                 | Not<br>supported | 600MHz                           | Available                  | Encoder I/F                                     |
| R7S910015CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported        | 450MHz                           | Not<br>supported           | R-IN Engine<br>(CM3 :<br>150MHz)                |
| R7S910115CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported        | 450MHz                           | Available                  | R-IN Engine<br>(CM3 :<br>150MHz)                |
| R7S910016CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported        | 450MHz                           | Not<br>supported           | Encoder I/F<br>R-IN Engine<br>(CM3 :<br>150MHz) |
| R7S910116CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported        | 450MHz                           | Available                  | Encoder I/F<br>R-IN Engine<br>(CM3 :<br>150MHz) |

**Table 1.3 List of Products (2 / 2)**


| Part No.     | Package                        | CPU        | On-Chip<br>Extended<br>SRAM<br>Capacity | EtherCAT  | Operating<br>Frequency<br>(max.) | Security<br>Function<br>*1 | Optional<br>Function                            |
|--------------|--------------------------------|------------|-----------------------------------------|-----------|----------------------------------|----------------------------|-------------------------------------------------|
| R7S910017CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported | 600MHz                           | Not<br>supported           | R-IN Engine<br>(CM3 :<br>150MHz)                |
| R7S910117CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported | 600MHz                           | Available                  | R-IN Engine<br>(CM3 :<br>150MHz)                |
| R7S910018CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported | 600MHz                           | Not<br>supported           | Encoder I/F<br>R-IN Engine<br>(CM3 :<br>150MHz) |
| R7S910118CBG | 320 pins<br>(PRBG0320GA<br>-A) | Cortex-R4F | (1 MB for R-<br>IN Engine)              | Supported | 600MHz                           | Available                  | Encoder I/F<br>R-IN Engine<br>(CM3 :<br>150MHz) |
| R7S910025CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 450MHz                           | Not<br>supported           | —                                               |
| R7S910125CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 450MHz                           | Available                  | —                                               |
| R7S910026CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 450MHz                           | Not<br>supported           | Encoder I/F                                     |
| R7S910126CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 450MHz                           | Available                  | Encoder I/F                                     |
| R7S910027CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 600MHz                           | Not<br>supported           | —                                               |
| R7S910127CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 600MHz                           | Available                  | —                                               |
| R7S910028CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 600MHz                           | Not<br>supported           | Encoder I/F                                     |
| R7S910128CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | 1 MB                                    | Supported | 600MHz                           | Available                  | Encoder I/F                                     |
| R7S910035CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | Not<br>supported                        | Supported | 300MHz                           | Not<br>supported           | —                                               |
| R7S910135CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | Not<br>supported                        | Supported | 300MHz                           | Available                  | —                                               |
| R7S910036CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | Not<br>supported                        | Supported | 300MHz                           | Not<br>supported           | Encoder I/F                                     |
| R7S910136CBG | 320 pins<br>(PRBG0320G<br>A-A) | Cortex-R4F | Not<br>supported                        | Supported | 300MHz                           | Available                  | Encoder I/F                                     |

Note: See the separate documents regarding the encoder I/F.

Note 1. Details of these optional functions will only be disclosed after completion of a binding non-disclosure agreement. For details, contact our sales representative.

### 1.3 Block Diagram

Figure 1.1 shows a block diagram of a 320-pin device.

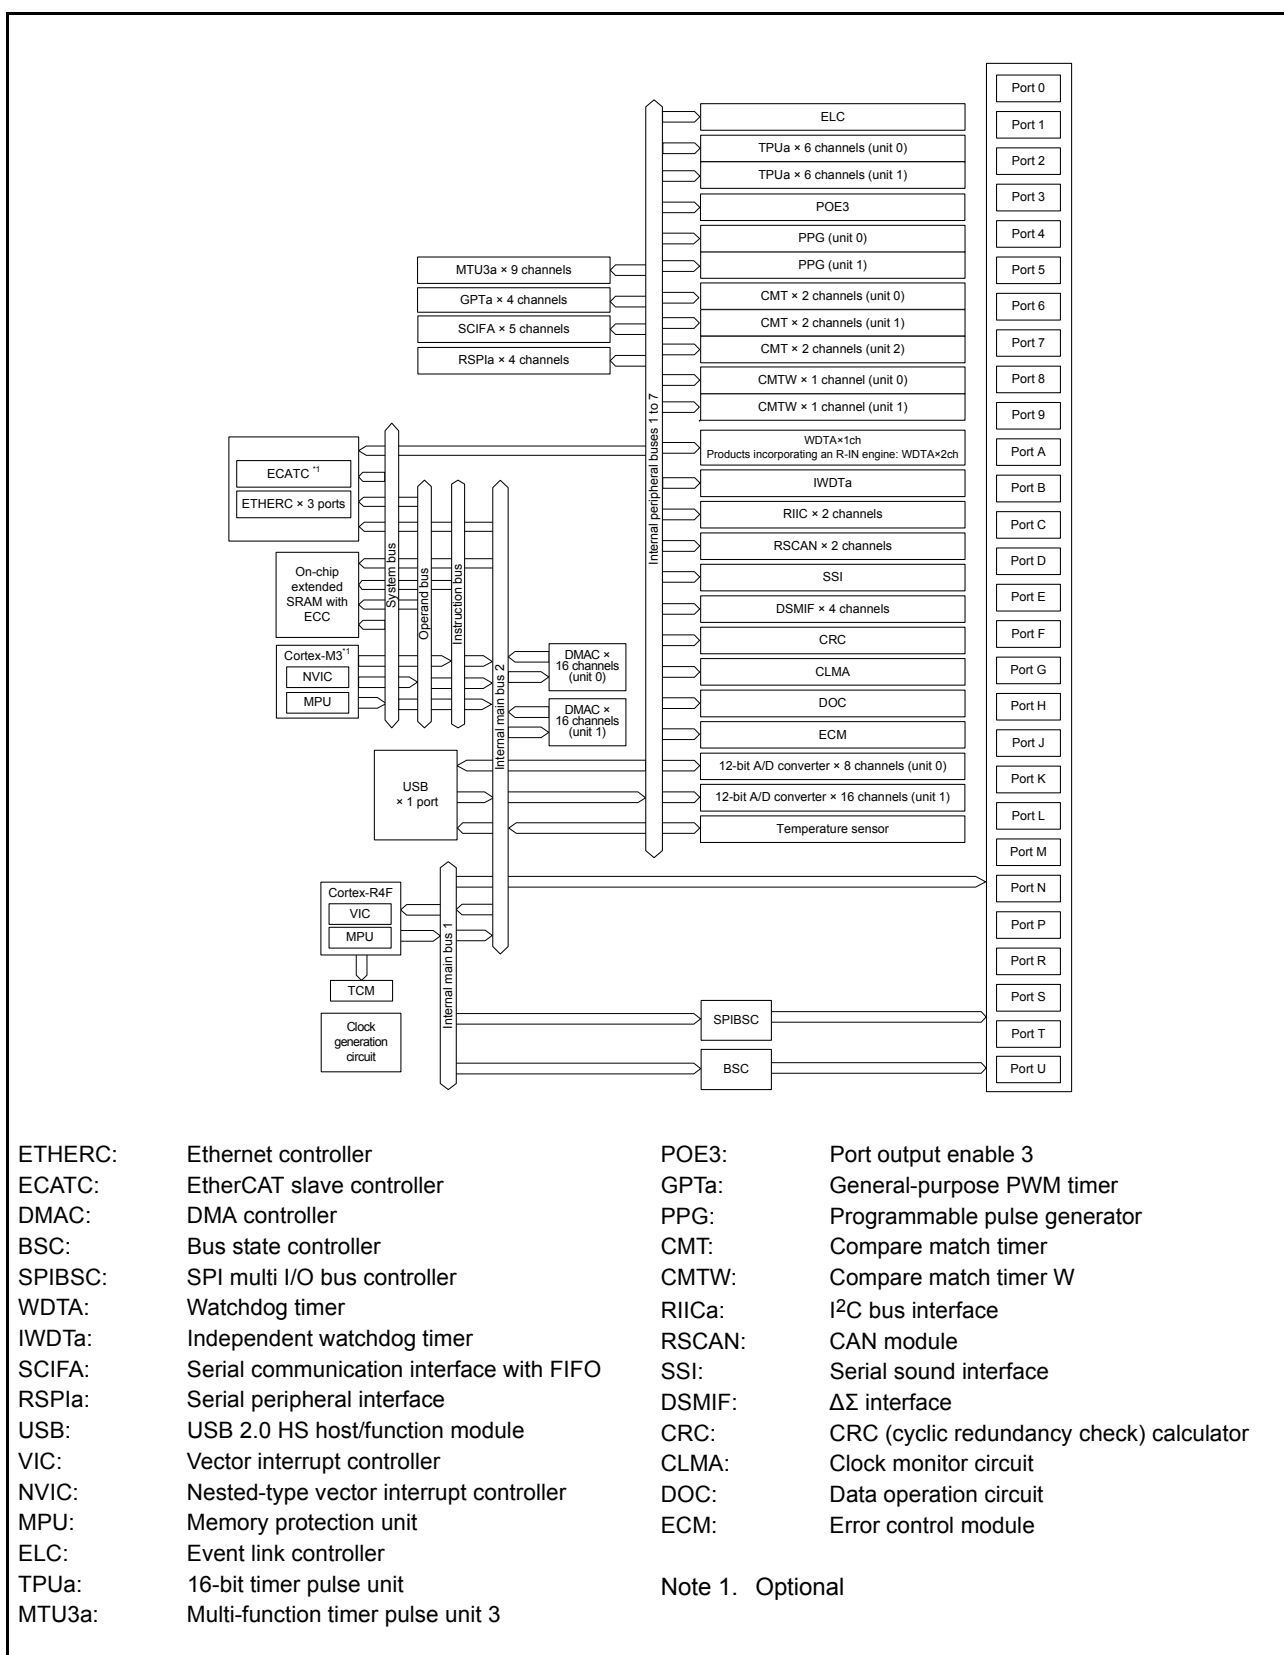

**Figure 1.1 Block Diagram**

## 1.4 Pin Functions

Table 1.4 lists the pin functions.

**Table 1.4 Pin Functions (1 / 7)**

| Classifications        | Pin Name                           | I/O    | Description                                                                                                                                                                 |
|------------------------|------------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply           | VDD                                | Input  | Power supply pin. Connect this pin to the system power supply.                                                                                                              |
|                        | VSS                                | Input  | Ground pin. Connect this pin to the system power supply (0 V).                                                                                                              |
|                        | VCCQ33                             | Input  | Power supply pin for I/O pins                                                                                                                                               |
|                        | PLLVDD0, PLLVDD1                   | Input  | Power supply pins for the on-chip PLL oscillator                                                                                                                            |
|                        | PLLVSS0, PLLVSS1                   | Input  | Ground pins for the on-chip PLL oscillator. Connect these pins to the system power supply (0 V).                                                                            |
| Clock                  | XTAL                               | Output | Connected to a crystal resonator. An external clock signal may also be input to the EXTAL pin.                                                                              |
|                        | EXTAL                              | Input  |                                                                                                                                                                             |
|                        | CKIO                               | Output | Outputs the external bus clock for external devices.                                                                                                                        |
|                        | AUDIO_CLK                          | Input  | Inputs the external clock for audio.                                                                                                                                        |
|                        | CLKOUT25M0, CLKOUT25M1, CLKOUT25M2 | Output | Output the external clock for Ethernet PHY.                                                                                                                                 |
| Operating mode control | MD0 to MD2                         | Input  | Input the operating mode select signal.                                                                                                                                     |
| System control         | RES#                               | Input  | Reset signal input pin. This LSI enters the reset state when this signal goes low.                                                                                          |
|                        | BSCANP                             | Input  | Inputs the boundary scan enable signal. Boundary scan is enabled when this pin goes high. When not used, it should be driven low.                                           |
|                        | OSCTH                              | Input  | Inputs the clock input mode select signal. When an external clock is input, this pin should be driven high. When a crystal resonator is connected, it should be driven low. |
|                        | ERROROUT#                          | Output | Outputs the error signal from the error control module (ECM).                                                                                                               |
|                        | RSTOUT#                            | Output | Outputs the reset signal externally.                                                                                                                                        |
| Debugging interface    | TRST#                              | Input  | Test reset pin for on-chip emulator                                                                                                                                         |
|                        | TMS                                | I/O    | Test mode select pin for on-chip emulator                                                                                                                                   |
|                        | TDI                                | Input  | Test data input pin for on-chip emulator                                                                                                                                    |
|                        | TDO                                | Output | Test data output pin for on-chip emulator                                                                                                                                   |
|                        | TCK                                | Input  | Test clock pin for on-chip emulator                                                                                                                                         |
|                        | TRACECLK                           | Output | Outputs the clock for synchronization with the trace data.                                                                                                                  |
|                        | TRACECTL                           | Output | Outputs the enable signal for trace control.                                                                                                                                |
|                        | TRACEDATA0 to 7                    | Output | Output the trace data.                                                                                                                                                      |

**Table 1.4 Pin Functions (2 / 7)**

| Classifications                        | Pin Name                     | I/O    | Description                                                                                                      |
|----------------------------------------|------------------------------|--------|------------------------------------------------------------------------------------------------------------------|
| Bus state controller (BSC)             | A0 to A25                    | Output | Output the address.                                                                                              |
|                                        | D0 to D31                    | I/O    | Input and output the data.                                                                                       |
|                                        | CS0# to CS5#                 | Output | Output the chip select signal for the external memory or device.                                                 |
|                                        | RD#                          | Output | Outputs the strobe signal which indicates reading is in progress.                                                |
|                                        | RD/WR#                       | Output | Outputs the strobe signal which indicates the read or write access.                                              |
|                                        | BS#                          | Output | Outputs the status signal which indicates the start of bus cycles.                                               |
|                                        | AH#                          | Output | Outputs the address hold signal for the device that uses the multiplexed I/O bus.                                |
|                                        | WAIT#                        | Input  | Inputs the external wait control signal which inserts a wait cycle into the bus cycles.                          |
|                                        | WE0#                         | Output | Outputs the write strobe signal to D7 to D0.                                                                     |
|                                        | WE1#                         | Output | Outputs the write strobe signal to D15 to D8.                                                                    |
|                                        | WE2#                         | Output | Outputs the write strobe signal to D23 to D16.                                                                   |
|                                        | WE3#                         | Output | Outputs the write strobe signal to D31 to D24.                                                                   |
|                                        | DQMLL                        | Output | Outputs the data mask enable signal to D7 to D0 when SDRAM is connected.                                         |
|                                        | DQMLU                        | Output | Outputs the data mask enable signal to D15 to D8 when SDRAM is connected.                                        |
|                                        | DQMUL                        | Output | Outputs the data mask enable signal to D23 to D16 when SDRAM is connected.                                       |
|                                        | DQMUU                        | Output | Outputs the data mask enable signal to D31 to D24 when SDRAM is connected.                                       |
|                                        | RAS#                         | Output | Outputs the low-address strobe signal to the SDRAM. This pin should be connected to the RAS pin on the SDRAM.    |
|                                        | CAS#                         | Output | Outputs the column-address strobe signal to the SDRAM. This pin should be connected to the CAS pin on the SDRAM. |
|                                        | CKE                          | Output | Outputs the clock enable signal to the SDRAM. This pin should be connected to the CKE pin on the SDRAM.          |
| Direct memory access controller (DMAC) | DREQ0 to DREQ2               | Input  | Input the DMA transfer request signal from the external device.                                                  |
|                                        | DACK0 to DACK2               | Output | Output the acknowledge signal which indicates acceptance of the DMA transfer request from the external device.   |
|                                        | TEND0 to TEND2               | Output | Output the DMA transfer end signal.                                                                              |
| Interrupt                              | NMI                          | Input  | Inputs the non-maskable interrupt request signal.                                                                |
|                                        | IRQ0 to IRQ15                | Input  | Input the external interrupt request signal.                                                                     |
|                                        | ETH0_INT, ETH1_INT, ETH2_INT | Input  | Input the Ethernet PHY interrupt request signal.                                                                 |

**Table 1.4 Pin Functions (3 / 7)**

| Classifications                           | Pin Name                             | I/O   | Description                                                                            |
|-------------------------------------------|--------------------------------------|-------|----------------------------------------------------------------------------------------|
| Multi-function timer pulse unit 3 (MTU3a) | MTIOC0A, MTIOC0B<br>MTIOC0C, MTIOC0D | I/O   | TGRA0 to TGRD0 input capture input/output compare output/<br>PWM output pins           |
|                                           | MTIOC1A, MTIOC1B                     | I/O   | TGRA1 and TGRB1 input capture input/output compare output/<br>PWM output pins          |
|                                           | MTIOC2A, MTIOC2B                     | I/O   | TGRA2 and TGRB2 input capture input/output compare output/<br>PWM output pins          |
|                                           | MTIOC3A, MTIOC3B<br>MTIOC3C, MTIOC3D | I/O   | TGRA3 to TGRD3 input capture input/output compare output/<br>PWM output pins           |
|                                           | MTIOC4A, MTIOC4B<br>MTIOC4C, MTIOC4D | I/O   | TGRA4 to TGRD4 input capture input/output compare output/<br>PWM output pins           |
|                                           | MTIC5U, MTIC5V<br>MTIC5W             | Input | TGRU5, TGRV5, and TGRW5 input capture input/dead time<br>compensation input pins       |
|                                           | MTIOC6A, MTIOC6B<br>MTIOC6C, MTIOC6D | I/O   | TGRA6 to TGRD6 input capture input/output compare output/<br>PWM output pins           |
|                                           | MTIOC7A, MTIOC7B<br>MTIOC7C, MTIOC7D | I/O   | TGRA7 to TGRD7 input capture input/output compare output/<br>PWM output pins           |
|                                           | MTIOC8A, MTIOC8B<br>MTIOC8C, MTIOC8D | I/O   | TGRA8 to TGRD8 input capture input/output compare output/<br>PWM output pins           |
|                                           | MTCLKA, MTCLKB<br>MTCLKC, MTCLKD     | Input | External clock input pins for MTU3a                                                    |
| Port output enable 3 (POE3)               | POE0#, POE4#<br>POE8#, POE10#        | Input | Input the request signal to place the MTU3a or GPTa in the high<br>impedance state.    |
| General-purpose PWM timer (GPTa)          | GTIOC0A, GTIOC0B                     | I/O   | GPT0.GTGRA and GPT0.GTGRB input capture input/output<br>compare output/PWM output pins |
|                                           | GTIOC1A, GTIOC1B                     | I/O   | GPT1.GTGRA and GPT1.GTGRB input capture input/output<br>compare output/PWM output pins |
|                                           | GTIOC2A, GTIOC2B                     | I/O   | GPT2.GTGRA and GPT2.GTGRB input capture input/output<br>compare output/PWM output pins |
|                                           | GTIOC3A, GTIOC3B                     | I/O   | GPT3.GTGRA and GPT3.GTGRB input capture input/output<br>compare output/PWM output pins |
|                                           | GTETRQ                               | Input | External trigger input pin for GPT0 to GPT3                                            |

**Table 1.4 Pin Functions (4 / 7)**

| Classifications                                  | Pin Name                       | I/O    | Description                                                                         |
|--------------------------------------------------|--------------------------------|--------|-------------------------------------------------------------------------------------|
| 16-bit timer pulse unit (TPUa)                   | TIOCA0, TIOCB0, TIOCC0, TIOCD0 | I/O    | TPU0.TGRA0 to TPU0.TGRD0 input capture input/output compare output/PWM output pins  |
|                                                  | TIOCA1, TIOCB1                 | I/O    | TPU0.TGRA1 and TPU0.TGRB1 input capture input/output compare output/PWM output pins |
|                                                  | TIOCA2, TIOCB2                 | I/O    | TPU0.TGRA2 and TPU0.TGRB2 input capture input/output compare output/PWM output pins |
|                                                  | TIOCA3, TIOCB3, TIOCC3, TIOCD3 | I/O    | TPU0.TGRA3 to TPU0.TGRD3 input capture input/output compare output/PWM output pins  |
|                                                  | TIOCA4, TIOCB4                 | I/O    | TPU0.TGRA4 and TPU0.TGRB4 input capture input/output compare output/PWM output pins |
|                                                  | TIOCA5, TIOCB5                 | I/O    | TPU0.TGRA5 and TPU0.TGRB5 input capture input/output compare output/PWM output pins |
|                                                  | TCLKA, TCLKB, TCLKC, TCLKD     | Input  | External clock input pins for TPU0                                                  |
|                                                  | TIOCA6, TIOCB6, TIOCC6, TIOCD6 | I/O    | TPU1.TGRA0 to TPU1.TGRD0 input capture input/output compare output/PWM output pins  |
|                                                  | TIOCA7, TIOCB7                 | I/O    | TPU1.TGRA1 and TPU1.TGRB1 input capture input/output compare output/PWM output pins |
|                                                  | TIOCA8, TIOCB8                 | I/O    | TPU1.TGRA2 and TPU1.TGRB2 input capture input/output compare output/PWM output pins |
|                                                  | TIOCA9, TIOCB9, TIOCC9, TIOCD9 | I/O    | TPU1.TGRA3 to TPU1.TGRD3 input capture input/output compare output/PWM output pins  |
|                                                  | TIOCA10, TIOCB10               | I/O    | TPU1.TGRA4 and TPU1.TGRB4 input capture input/output compare output/PWM output pins |
|                                                  | TIOCA11, TIOCB11               | I/O    | TPU1.TGRA5 and TPU1.TGRB5 input capture input/output compare output/PWM output pins |
|                                                  | TCLKF, TCLKG, TCLKH            | Input  | External clock input pins for TPU1                                                  |
| Programmable pulse generator (PPG)               | PO0 to PO31                    | Output | Pulse output pins                                                                   |
| Compare match timer W (CMTW)                     | TIC0 to TIC3                   | Input  | CMTW input capture input pins                                                       |
|                                                  | TOC0 to TOC3                   | Output | CMTW output compare output pins                                                     |
| Serial communication interface with FIFO (SCIFA) | SCK0 to SCK4                   | I/O    | Clock I/O pins                                                                      |
|                                                  | RXD0 to RXD4                   | Input  | Input the receive data.                                                             |
|                                                  | TXD0 to TXD4                   | Output | Output the transmit data.                                                           |
|                                                  | CTS0# to CTS4#                 | Input  | Input pins for controlling the start of transmission and reception                  |
|                                                  | RTS0# to RTS4#                 | Output | Output pins for controlling the start of transmission and reception                 |
| I <sup>2</sup> C bus interface (RIICa)           | SCL0, SCL1                     | I/O    | Clock I/O pins. The bus can be directly driven by the N-channel open drain.         |
|                                                  | SDA0, SDA1                     | I/O    | Data I/O pins. The bus can be directly driven by the N-channel open drain.          |

**Table 1.4 Pin Functions (5 / 7)**

| Classifications                              | Pin Name                                       | I/O    | Description                                                                                  |
|----------------------------------------------|------------------------------------------------|--------|----------------------------------------------------------------------------------------------|
| Ethernet controller (ETHERC)                 | ETH0_TXC, ETH1_TXC, ETH2_TXC                   | Input  | Input the 10 M/100 M transmission clock (2.5 MHz/25 MHz).                                    |
|                                              | ETH0_TXEN, ETH1_TXEN, ETH2_TXEN                | Output | Output the transmission enable signal.                                                       |
|                                              | ETH0_TXER, ETH1_TXER, ETH2_TXER                | Output | Output the transmission error signal.                                                        |
|                                              | ETH0_TXD0 to 3, ETH1_TXD0 to 3, ETH2_TXD0 to 3 | Output | Output the transmission data signal.                                                         |
|                                              | ETH0_RXC, ETH1_RXC, ETH2_RXC                   | I/O    | Receive clock I/O pins                                                                       |
|                                              | ETH0_RXDV, ETH1_RXDV, ETH2_RXDV                | Input  | Input the receive data enable signal.                                                        |
|                                              | ETH0_RXER, ETH1_RXER, ETH2_RXER                | Input  | Input the receive data error signal.                                                         |
|                                              | ETH0_RXD0 to 3, ETH1_RXD0 to 3, ETH2_RXD0 to 3 | Input  | Input the receive data signal.                                                               |
|                                              | ETH0_CRS, ETH1_CRS, ETH2_CRS                   | Input  | Input the carrier sense signal.                                                              |
|                                              | ETH0_COL, ETH1_COL, ETH2_COL                   | Input  | Input the collision detection signal.                                                        |
|                                              | ETH_MDC, MII2_MDC                              | Output | Output the management interface clock.                                                       |
|                                              | ETH_MDIO, MII2_MDIO                            | I/O    | Management data signal I/O pins                                                              |
|                                              | PHYLINK0, PHYLINK1                             | Input  | Input the PHY Link signal.                                                                   |
|                                              | ETHSWSECOUT                                    | Output | Event output pin for Ether Switch per second                                                 |
|                                              | PHYRESETOUT#, PHYRESETOUT2#                    | Output | Output the PHY RESET signal (PHYRESETOUT#: for Ether0 and Ether1, PHYRESETOUT2#: for Ether2) |
| EtherCAT slave controller (ECATC) (optional) | CATLEDRUN                                      | Output | Outputs the EtherCAT RUN LED signal.                                                         |
|                                              | CATIRQ                                         | Output | Outputs the EtherCAT IRQ signal.                                                             |
|                                              | CATLEDSTER                                     | Output | Outputs the EtherCAT Dual-color state LED signal.                                            |
|                                              | CATLEDERR                                      | Output | Outputs the EtherCAT error LED signal.                                                       |
|                                              | CATLINKACT0, CATLINKACT1                       | Output | Output the EtherCAT link/activity LED signal.                                                |
|                                              | CATSYNC0, CATSYNC1                             | Output | Output the EtherCAT SYNC signal.                                                             |
|                                              | CATLATCH0, CATLATCH1                           | Input  | Input the EtherCAT LATCH signal.                                                             |
|                                              | CATI2CCLK                                      | Output | Outputs the EtherCAT EEPROM I <sup>2</sup> C clock signal.                                   |
|                                              | CATI2CDATA                                     | I/O    | Inputs/outputs the EtherCAT EEPROM I <sup>2</sup> C data signal.                             |

**Table 1.4 Pin Functions (6 / 7)**

| Classifications                       | Pin Name                       | I/O    | Description                                                                                                                                               |
|---------------------------------------|--------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB 2.0 host/function module          | VDD33_USB                      | Input  | Power supply input pin for USB                                                                                                                            |
|                                       | VSS_USB                        | Input  | Ground input pin for USB                                                                                                                                  |
|                                       | DVDD_USB                       | Input  | Digital power supply input pin for USB                                                                                                                    |
|                                       | USB_RREF                       | Input  | Reference current input pin for USB. Connect this pin to the VSS_USB pin via 200Ω (±1%).                                                                  |
|                                       | USB_DP                         | I/O    | USB bus D+ data I/O pin                                                                                                                                   |
|                                       | USB_DM                         | I/O    | USB bus D- data I/O pin                                                                                                                                   |
|                                       | USB_VBUSEN                     | Output | Outputs the VBUS power enable signal for USB.                                                                                                             |
|                                       | USB_OVRCUR                     | Input  | Inputs the overcurrent signal for USB.                                                                                                                    |
|                                       | USB_VBUSIN                     | Input  | USB cable connection/disconnection detection input pin                                                                                                    |
| CAN module (RSCAN)                    | CRXD0 to CRXD1                 | Input  | Receive data input pins                                                                                                                                   |
|                                       | CTXD0 to CTXD1                 | Output | Transmit data output pins                                                                                                                                 |
| Serial peripheral interface (RSPIa)   | RSPCK0 to RSPCK3               | I/O    | Clock I/O pins                                                                                                                                            |
|                                       | MOSI0 to MOSI3                 | I/O    | Master transmit data I/O pins                                                                                                                             |
|                                       | MISO0 to MISO3                 | I/O    | Slave transmit data I/O pins                                                                                                                              |
|                                       | SSL00, SSL10, SSL20, SSL30     | I/O    | Slave select signal I/O pins                                                                                                                              |
|                                       | SSL01, SSL02, SSL03, SSL11     | Output | Slave select signal output pins                                                                                                                           |
| SPI multi I/O bus controller (SPIBSC) | SPBCLK                         | Output | Clock output pin                                                                                                                                          |
|                                       | SPBSSL                         | Output | Slave select signal output pin                                                                                                                            |
|                                       | SPBMO/SPBIO0                   | I/O    | Master transmit data/data 0 I/O pins                                                                                                                      |
|                                       | SPBMI/SPBIO1                   | I/O    | Master input data/data 1 I/O pins                                                                                                                         |
|                                       | SPBIO2 to 3                    | I/O    | Data 2, data 3 I/O pins                                                                                                                                   |
| Serial sound interface (SSI)          | SSISCK0                        | I/O    | SSI serial bit clock I/O pin                                                                                                                              |
|                                       | SSIWS0                         | I/O    | Word select I/O pin                                                                                                                                       |
|                                       | SSITXD0                        | Output | Serial data output pin                                                                                                                                    |
|                                       | SSIRXD0                        | Input  | Serial data input pin                                                                                                                                     |
| ΔΣ interface (DSMIF)                  | MCLK0 to MCLK3                 | I/O    | Clock I/O pins                                                                                                                                            |
|                                       | MDAT0 to MDAT3                 | Input  | Data input pins                                                                                                                                           |
| 12-bit A/D converter (S12ADCa)        | AN000 to AN007, AN100 to AN115 | Input  | Analog input pins for A/D converter                                                                                                                       |
|                                       | ADTRG0, ADTRG1                 | Input  | External trigger input pins for the start of A/D conversion                                                                                               |
|                                       | AN1_ANEX0                      | Output | Extended analog output pin                                                                                                                                |
|                                       | AN1_ANEX1                      | Input  | Extended analog input pin                                                                                                                                 |
| Analog power supply                   | AVCC0                          | Input  | Analog power supply input pin for the 12-bit A/D converter (unit 0). Connect this pin to the VCCQ33 pin if the 12-bit A/D converter is not to be used.    |
|                                       | AVSS0                          | Input  | Analog ground input pin for the 12-bit A/D converter (unit 0). Connect this pin to the VSS pin if the 12-bit A/D converter is not to be used.             |
|                                       | VREFH0                         | Input  | Reference power supply input pin for the 12-bit A/D converter (unit 0). Connect this pin to the VCCQ33 pin if the 12-bit A/D converter is not to be used. |
|                                       | VREFL0                         | Input  | Reference ground pin for the 12-bit A/D converter (unit 0). Connect this pin to the VSS pin if the 12-bit A/D converter is not to be used.                |

**Table 1.4 Pin Functions (7 / 7)**

| Classifications     | Pin Name           | I/O        | Description                                                                                                                                               |
|---------------------|--------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analog power supply | AVCC1              | Input      | Analog power supply input pin for the 12-bit A/D converter (unit 1). Connect this pin to the VCCQ33 pin if the 12-bit A/D converter is not to be used.    |
|                     | AVSS1              | Input      | Analog ground input pin for the 12-bit A/D converter (unit 1). Connect this pin to the VSS pin if the 12-bit A/D converter is not to be used.             |
|                     | VREFH1             | Input      | Reference power supply input pin for the 12-bit A/D converter (unit 1). Connect this pin to the VCCQ33 pin if the 12-bit A/D converter is not to be used. |
|                     | VREFL1             | Input      | Reference ground pin for the 12-bit A/D converter (unit 1). Connect this pin to the VSS pin if the 12-bit A/D converter is not to be used.                |
| I/O ports           | P00 to P07         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P10 to P17         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P20 to P27         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P30 to P37         | Input, I/O | 1-bit input pin (P30), 7-bit I/O pins (P31 to P37) I/O pins                                                                                               |
|                     | P40 to P47         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P50 to P56         | I/O        | 7-bit I/O pins                                                                                                                                            |
|                     | P60 to P67         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P70 to P77         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P80 to P87         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | P90 to P97         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PA0 to PA7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PB0 to PB7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PC0 to PC7         | Input      | 8-bit input pins I/O pins                                                                                                                                 |
|                     | PD0 to PD7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PE0 to PE7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PF5 to PF7         | I/O        | 3-bit I/O pins                                                                                                                                            |
|                     | PG0 to PG7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PH0 to PH7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PJ0 to PJ7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PK0 to PK7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PL0 to PL7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PM0 to PM7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PN0 to PN7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PP0 to PP7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PR0 to PR7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PS0 to PS7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PT0 to PT7         | I/O        | 8-bit I/O pins                                                                                                                                            |
|                     | PU0 to PU7         | I/O        | 8-bit I/O pins                                                                                                                                            |
| Encoder I/F*1       | ENCIF00 to ENCIF07 | I/O        | I/O pins for multi-protocol encoder interface                                                                                                             |


Note 1. Only in products with the encoder interfaces.

## 1.5 Pin Assignments

Figure 1.2 and Figure 1.3 show the pin arrangement. Table 1.5 and Table 1.6 show the pin assignments. Table 1.7 and Table 1.8 show the lists of pin functions.

|   | 1        | 2          | 3         | 4   | 5   | 6          | 7         | 8       | 9   | 10      | 11  | 12      | 13     | 14      | 15     | 16      | 17      | 18      | 19  | 20      |         |     |     |     |     |   |
|---|----------|------------|-----------|-----|-----|------------|-----------|---------|-----|---------|-----|---------|--------|---------|--------|---------|---------|---------|-----|---------|---------|-----|-----|-----|-----|---|
| A | VSS      | PC2        | PJ3       | PJ1 | PF7 | PB4        | PB0       | PC0     | PF6 | VCC Q33 | P54 | VSS     | AN0 07 | AN0 05  | AN0 02 | AVC C0  | AVC C1  | VRE FH1 | P17 | VSS     | A       |     |     |     |     |   |
| B | PJ5      | PJ4        | PC3       | PJ2 | PJ0 | PB5        | PB2       | PC1     | PB7 | P86     | PD7 | P52     | AN0 06 | AN0 03  | AN0 01 | AVS S0  | AVS S1  | VRE FL1 | P16 | P15     | B       |     |     |     |     |   |
| C | PJ7      | PJ6        | PU2       | PL7 | PL5 | PB6        | PB3       | PB1     | PF5 | P87     | PD6 | P53     | P51    | AN0 04  | AN0 00 | VRE FL0 | VRE FH0 | PD2     | P14 | P13     | C       |     |     |     |     |   |
| D | P81      | P80        | PU3       |     |     |            |           |         |     |         |     |         |        |         |        |         |         | PD0     | P96 | P95     | D       |     |     |     |     |   |
| E | P84      | P82        | PU1       |     |     | PU0        | PL6       | PL4     | PL2 | PL0     | PK7 | PK6     | PD5    | P56     | PD4    | VCC Q33 | PD1     |         |     | P97     | P94     | P93 | E   |     |     |   |
| F | PC4      | P83        | P85       |     |     | PU4        | VSS       | VCC Q33 | PL3 | PL1     | PK5 | PK4     | P55    | P50     | PD3    | PK2     | P90     |         |     | P92     | P91     | P12 | F   |     |     |   |
| G | PU6      | PC5        | VCC Q33   |     |     | PU5        | PM0       |         |     |         |     |         |        |         | PK3    | PA7     |         |         | PA4 | PA3     | P11     | G   |     |     |     |   |
| H | PU7      | PM1        | P35       |     |     | ERR OR OUT | VCC Q33   | VDD     |     |         |     |         |        |         |        | PA6     | PA5     |         |     | PA2     | PK0     | PK1 | H   |     |     |   |
| J | PM6      | PM3        | PM2       |     |     | P33        | TRST#     | VDD     |     |         |     |         |        | VSS     | VSS    | VSS     | VSS     | VDD     |     |         | VCC Q33 | PA1 | PA0 | PT7 | PT6 | J |
| K | PM7      | PM5        | PM4       |     |     | P34        | PLL VDD 1 | VDD     |     |         |     |         |        | VSS     | VSS    | VSS     | VSS     | VDD     |     |         | VSS     | P77 | P76 | P75 | PT5 | K |
| L | MD1      | MD2        | TMS       |     |     | TCK        | PLL VSS 1 | VDD     |     |         |     |         |        | VSS     | VSS    | VSS     | VSS     | VDD     |     |         | VSS     | PE7 | P72 | P73 | P74 | L |
| M | XTAL     | EXTAL      | OSCTH     |     |     | BSCANP     | PLL VDD 0 | VDD     |     |         |     |         |        | VSS     | VSS    | VSS     | VSS     | VDD     |     |         | VCC Q33 | PE6 | P70 | PT4 | P71 | M |
| N | VSS      | MD0        | RST OUT # |     |     | RES #      | PLL VSS 0 | VDD     |     |         |     |         |        | VSS     | VDD    | VDD     | VDD     | VDD     |     |         | PE2     | PE4 | PE5 | PT2 | PT3 | N |
| P | VSS USB  | VDD 33 USB | USB _RREF |     |     | P31        | VCC Q33   |         |     |         |     |         |        |         |        |         | P06     | P07     |     |         | PE3     | PT0 | PT1 | P   |     |   |
| R | USB _DP  | USB _DM    | P30       |     |     | PN0        | PN2       | PG0     | PG2 | PG7     | PH2 | PH4     | PH6    | P23     | P27    | P47     | VCC Q33 |         |     | VCC Q33 | PS6     | PS7 | R   |     |     |   |
| T | DVD _USB | VDD 33 USB | P32       |     |     | PC6        | P37       | P36     | PG3 | PG6     | PH3 | VCC Q33 | PH5    | VCC Q33 | P26    | VCC Q33 | VSS     |         |     | VSS     | PE0     | PE1 | T   |     |     |   |
| U | P60      | P63        | PN1       |     |     |            |           |         |     |         |     |         |        |         |        |         |         |         |     | P00     | P04     | P03 | U   |     |     |   |
| V | P61      | P64        | PN3       | PN4 | PC7 | PG1        | PG4       | PG5     | PH0 | PH1     | PH7 | P20     | P21    | VSS     | P45    | P46     | PS2     | P05     | P01 | P02     | V       |     |     |     |     |   |
| W | P62      | P65        | PN5       | PN6 | PP0 | PP2        | PP4       | PP6     | PP7 | PR1     | PR3 | PR5     | P24    | P22     | P44    | P43     | PS1     | PS3     | PS4 | PS5     | W       |     |     |     |     |   |
| Y | VSS      | P67        | P66       | PN7 | PP1 | PP3        | PP5       | VSS     | PR0 | PR2     | PR4 | PR6     | PR7    | P25     | P41    | P42     | P40     | PS0     | P10 | VSS     | Y       |     |     |     |     |   |
|   | 1        | 2          | 3         | 4   | 5   | 6          | 7         | 8       | 9   | 10      | 11  | 12      | 13     | 14      | 15     | 16      | 17      | 18      | 19  | 20      |         |     |     |     |     |   |

Figure 1.2 Pin Arrangement (320-Pin FBGA) (Top View)

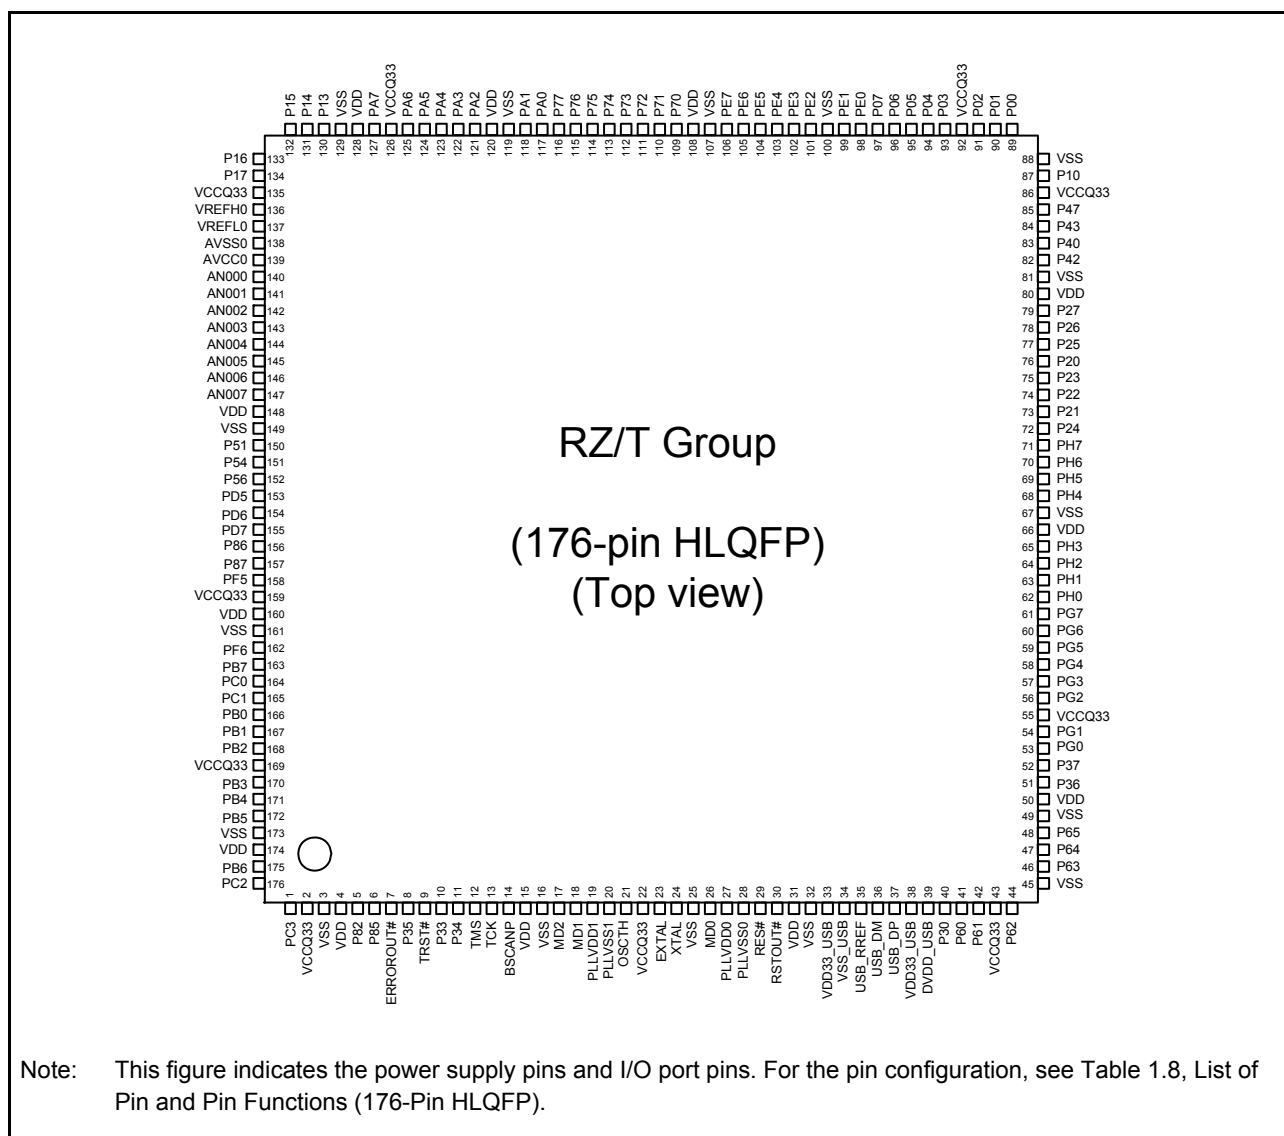**Figure 1.3 Pin Arrangement (176-pin HLQFP)**

**Table 1.5 Pin Assignments (320-Pin FBGA) (1 / 8)**

| Pin Number | Pin Name                                                                       |
|------------|--------------------------------------------------------------------------------|
| A1         | VSS                                                                            |
| A2         | PC2 / ETH0_TXC / ETH1_RXD2 / CATI2CDATA / SDA0                                 |
| A3         | PJ3 / IRQ11 / ETH0_TXD0 / ADTRG0                                               |
| A4         | PJ1 / ETH0_TXD2 / CATLEDSTER / RSPCK3                                          |
| A5         | PF7 / IRQ7 / A25 / ETH0_TXER / RTS3# / SSL30                                   |
| A6         | PB4 / A24 / ETH1_COL / ETH0_RXER / CATSYNC0 / CATLATCH0 / RXD3 / MOSI3 / MDAT0 |
| A7         | PB0 / ETH1_RXDV / MTCLKB / TCLKD / TIC3                                        |
| A8         | PC0 / WAIT# / ETH1_RXD2 / GTETRQ / SCL1 / MDAT3                                |
| A9         | PF6 / ETH1_RXD0 / MTIOC3D / GTIOC0B / TOC2                                     |
| A10        | VCCQ33                                                                         |
| A11        | P54 / CLKOUT25M1 / MOSI2                                                       |
| A12        | VSS                                                                            |
| A13        | AN007                                                                          |
| A14        | AN005                                                                          |
| A15        | AN002                                                                          |
| A16        | AVCC0                                                                          |
| A17        | AVCC1                                                                          |
| A18        | VREFH1                                                                         |
| A19        | P17 / CS5# / ETH1_TXER / PHYRESETOUT# / ADTRG0                                 |
| A20        | VSS                                                                            |
| B1         | PJ5 / ETH0_RXD1 / TIOCD0 / RXD3                                                |
| B2         | PJ4 / ETH0_RXD0 / TXD3                                                         |
| B3         | PC3 / ETH0_RXC / ETH0_RXDV / CATI2CCLK / RXD4 / SCL0 / CRXD1                   |
| B4         | PJ2 / IRQ10 / ETH0_TXD1 / MISO3                                                |
| B5         | PJ0 / IRQ8 / ETH0_TXD3 / CATLEDERR / MOSI3                                     |
| B6         | PB5 / ETH_MDIO / TCLKB / POE0# / POE10# / CTS3# / RSPCK3                       |
| B7         | PB2 / ETH1_RXC / ETH0_RXD1 / CATSYNC1 / CATLATCH1 / MTIOC1A / SSL30 / MDAT1    |
| B8         | PC1 / IRQ9 / ETH1_RXD3 / PHYLINK0 / SDA1 / MDAT2                               |
| B9         | PB7 / ETH1_RXD1 / MTIOC3B / GTIOC0A / TOC3                                     |
| B10        | P86 / AN1_ANEX0 / ETH1_TXD0 / MTIOC4B / GTIOC2A / TOC1 / RSPCK2                |
| B11        | PD7 / AN115 / ETH1_TXD1 / MTIOC4D / GTIOC2B / TOC0                             |
| B12        | P52 / ETH0_INT / SSL20                                                         |
| B13        | AN006                                                                          |
| B14        | AN003                                                                          |
| B15        | AN001                                                                          |
| B16        | AVSS0                                                                          |
| B17        | AVSS1                                                                          |
| B18        | VREFL1                                                                         |
| B19        | P16 / CS4# / CS2# / MTIOC3B / GTIOC0A                                          |
| B20        | P15 / CS3# / CKE / MTIOC3D / GTIOC0B                                           |
| C1         | PJ7 / IRQ15 / ETH0_RXD3 / CATLEDRUN / CTS3#                                    |
| C2         | PJ6 / IRQ14 / ETH0_RXD2 / CATIRQ / SCK3                                        |
| C3         | PU2 / IRQ2 / ETH2_CRS / TIOCD9 / RXD3                                          |
| C4         | PL7 / IRQ15 / ETH2_RXDV                                                        |

**Table 1.5 Pin Assignments (320-Pin FBGA) (2 / 8)**

| Pin Number | Pin Name                                                                 |
|------------|--------------------------------------------------------------------------|
| C5         | PL5 / ETH2_RXD2 / TIOCA8                                                 |
| C6         | PB6 / ETH_MDC / TCLKA / SCK3 / RTS4# / MISO3                             |
| C7         | PB3 / IRQ3 / CS1# / ETH1_CRS / PHYRESETOUT# / TXD3 / CTXD1 / MCLK0       |
| C8         | PB1 / ETH1_RXER / MTCLKA / TCLKC / CTS4#                                 |
| C9         | PF5 / ETH1_TXEN / MTIOC4A / GTIOC1A / TIC2                               |
| C10        | P87 / AN1_ANEX1 / A23 / ETH1_TXC / ETH0_RXD0 / MTIOC4C / GTIOC1B / MCLK1 |
| C11        | PD6 / AN114 / A22 / ETH1_TXD2 / ETH0_TXD1 / TIC1 / MISO2 / MCLK2         |
| C12        | P53 / ETH1_INT / MISO2                                                   |
| C13        | P51 / IRQ1 / PHYLINK1 / RSPCK2                                           |
| C14        | AN004                                                                    |
| C15        | AN000                                                                    |
| C16        | VREFL0                                                                   |
| C17        | VREFH0                                                                   |
| C18        | PD2 / AN110 / WAIT#                                                      |
| C19        | P14 / CAS# / MTIOC4A / GTIOC1A                                           |
| C20        | P13 / RAS# / MTIOC4C / GTIOC1B                                           |
| D1         | P81 / ETH0_RXER / TIOCC0 / CTS4#                                         |
| D2         | P80 / IRQ8 / ETH0_RXDV / TIOCC3 / RTS4#                                  |
| D3         | PU3 / ETH2_COL / TIOCD6 / TXD3                                           |
| D18        | PD0 / AN108 / CS4#                                                       |
| D19        | P96 / AN106 / POE0# / POE10#                                             |
| D20        | P95 / AN105 / IRQ13 / MTCLKA / CTS2#                                     |
| E1         | P84 / ETH0_COL / CATLINKACT1 / RXD4                                      |
| E2         | P82 / ETH0_TXEN / ETH1_CRS / TIOCD3 / SCK4 / RTS3# / USB_OVRCUR          |
| E3         | PU1 / ETH2_RXC / TIOCA11 / SCK3                                          |
| E5         | PU0 / ETH2_RXER / TIOCA10                                                |
| E6         | PL6 / ETH2_RXD3 / TIOCA9                                                 |
| E7         | PL4 / IRQ4 / ETH2_RXD1                                                   |
| E8         | PL2 / ETH2_TXEN / TIOCA6 / ADTRG1                                        |
| E9         | PL0 / ETH2_TXD0 / TIOCB9                                                 |
| E10        | PK7 / ETH2_TXD2 / TIOCB7                                                 |
| E11        | PK6 / ETH2_TXD3 / TIOCB6                                                 |
| E12        | PD5 / AN113 / A21 / ETH1_TXD3 / ETH0_TXD0 / TIC0 / SSL20 / MCLK3         |
| E13        | P56 / BS# / ETH1_TXER                                                    |
| E14        | PD4 / AN112 / ETH2_INT                                                   |
| E15        | VCCQ33                                                                   |
| E16        | PD1 / AN109 / CS1#                                                       |
| E18        | P97 / AN107 / IRQ7 / A25 / ADTRG1                                        |
| E19        | P94 / AN104 / IRQ4 / MTCLKB / RTS2#                                      |
| E20        | P93 / AN103 / MTIOC1A / TIC3 / SCK2 / ENCIF07                            |
| F1         | PC4 / CATI2CCLK / TCLKH / SCL0                                           |
| F2         | P83 / IRQ11 / ETH0_CRS / CATLINKACT0 / TXD4                              |
| F3         | P85 / IRQ5 / CLKOUT25M0 / TXD4 / SCK4 / USB_VBUSEN                       |
| F5         | PU4 / MII2_MDC / TIOCC9 / CTS3#                                          |
| F6         | VSS                                                                      |

**Table 1.5 Pin Assignments (320-Pin FBGA) (3 / 8)**

| Pin Number | Pin Name                                                         |
|------------|------------------------------------------------------------------|
| F7         | VCCQ33                                                           |
| F8         | PL3 / ETH2_RXD0 / TIOCA7                                         |
| F9         | PL1 / ETH2_TXC / TIOCB10                                         |
| F10        | PK5 / ETH2_TXD1 / TIOCB8                                         |
| F11        | PK4 / ETH2_TXER / TIOCB11 / MOSI2                                |
| F12        | P55 / IRQ5 / A24 / ETHSWSECOUT                                   |
| F13        | P50 / IRQ8 / CS1# / PHYLINK0                                     |
| F14        | PD3 / AN111 / PHYRESETOUT2#                                      |
| F15        | PK2 / A23                                                        |
| F16        | P90 / AN100 / RAS# / TIOCA5 / TXD4                               |
| F18        | P92 / AN102 / CS5# / TOC3 / RXD2                                 |
| F19        | P91 / AN101 / CAS# / TXD2 / ENCIF06                              |
| F20        | P12 / MTIOC4B / GTIOC2A                                          |
| G1         | PU6 / PHYRESETOUT# / TCLKF / CTS4#                               |
| G2         | PC5 / CATI2CDATA / TCLKG / SDA0                                  |
| G3         | VCCQ33                                                           |
| G5         | PU5 / IRQ13 / MII2_MDIO / TIOCC6 / RTS3#                         |
| G6         | PM0 / CLKOUT25M2 / TXD4                                          |
| G15        | PK3 / A24                                                        |
| G16        | PA7 / IRQ7 / D31 / A22 / MTIOC6B / GTIOC3B / RTS2# / MCLK0       |
| G18        | PA4 / D28 / ETH1_INT / TIOCA3 / ADTRG0 / RXD2 / TEND2 / MDAT1    |
| G19        | PA3 / D27 / ETHSWSECOUT / GTETRG / TIOCA2 / SCK2 / DACK2 / MCLK2 |
| G20        | P11 / IRQ9 / MTIOC4D / GTIOC2B                                   |
| H1         | PU7 / CATIRQ / RXD4                                              |
| H2         | PM1 / CATLEDERR / SCK4                                           |
| H3         | P35 / NMI                                                        |
| H5         | ERROROUT#                                                        |
| H6         | VCCQ33                                                           |
| H8         | VDD                                                              |
| H9         | VDD                                                              |
| H10        | VDD                                                              |
| H11        | VDD                                                              |
| H12        | VDD                                                              |
| H13        | VSS                                                              |
| H15        | PA6 / IRQ6 / D30 / A21 / GTIOC3A / CTS2# / MDAT0                 |
| H16        | PA5 / D29 / ETH0_INT / ETH1_TXER / TIOCA4 / TXD2 / MCLK1         |
| H18        | PA2 / D26 / MTIOC3B / GTIOC0A / SSL02 / DREQ2 / MDAT2 / ENCIF05  |
| H19        | PK0 / CAS# / PO31                                                |
| H20        | PK1 / CS5#                                                       |
| J1         | PM6 / IRQ6 / CATLINKACT0 / PO19                                  |
| J2         | PM3 / CATSYNC0 / CATLATCH0 / PO16                                |
| J3         | PM2 / CATSYNC1 / CATLATCH1 / TCLKE / RTS4#                       |
| J5         | P33 / TDO                                                        |
| J6         | TRST#                                                            |
| J8         | VDD                                                              |

**Table 1.5 Pin Assignments (320-Pin FBGA) (4 / 8)**

| Pin Number | Pin Name                                                               |
|------------|------------------------------------------------------------------------|
| J9         | VSS                                                                    |
| J10        | VSS                                                                    |
| J11        | VSS                                                                    |
| J12        | VSS                                                                    |
| J13        | VDD                                                                    |
| J15        | VCCQ33                                                                 |
| J16        | PA1 / D25 / MTIOC3D / GTIOC0B / MISO0 / AUDIO_CLK / TRACEDATA7 / MCLK3 |
| J18        | PA0 / D24 / MTIOC4A / GTIOC1A / MOSI0 / TRACEDATA6 / MDAT3             |
| J19        | PT7 / A22 / DACK2                                                      |
| J20        | PT6 / A21 / DREQ2                                                      |
| K1         | PM7 / CATLINKACT1 / PO20                                               |
| K2         | PM5 / CATLEDSTER / PO18                                                |
| K3         | PM4 / CATLEDRUN / PO17                                                 |
| K5         | P34 / TDI                                                              |
| K6         | PLLVDD1                                                                |
| K8         | VDD                                                                    |
| K9         | VSS                                                                    |
| K10        | VSS                                                                    |
| K11        | VSS                                                                    |
| K12        | VSS                                                                    |
| K13        | VDD                                                                    |
| K15        | VSS                                                                    |
| K16        | P77 / D23 / MTIOC4C / GTIOC1B / RSPCK0 / TRACEDATA5                    |
| K18        | P76 / D22 / MTIOC4B / GTIOC2A / SSL01 / SSIWS0 / TRACEDATA4            |
| K19        | P75 / IRQ13 / D21 / MTIOC4D / GTIOC2B / SSL00 / TRACEDATA3/ ENCIF04    |
| K20        | PT5 / BS# / PO30 / TEND2                                               |
| L1         | MD1                                                                    |
| L2         | MD2                                                                    |
| L3         | TMS                                                                    |
| L5         | TCK                                                                    |
| L6         | PLLVSS1                                                                |
| L8         | VDD                                                                    |
| L9         | VSS                                                                    |
| L10        | VSS                                                                    |
| L11        | VSS                                                                    |
| L12        | VSS                                                                    |
| L13        | VDD                                                                    |
| L15        | VSS                                                                    |
| L16        | PE7 / D15 / MTIOC7A / TIOCD3 / POE8# / SCK1 / RSPCK0 / TRACEDATA7      |
| L18        | P72 / D18 / MTIOC1A / TIC2 / TXD1 / SSITXD0 / TRACEDATA0 / ENCIF02     |
| L19        | P73 / IRQ3 / D19 / MTCLKB / RXD1 / SSIRXD0 / TRACEDATA1 / ENCIF03      |
| L20        | P74 / D20 / MTCLKA / CTS1# / SSL03 / SSISCK0 / TRACEDATA2              |
| M1         | XTAL                                                                   |
| M2         | EXTAL                                                                  |
| M3         | OSCTH                                                                  |

**Table 1.5 Pin Assignments (320-Pin FBGA) (5 / 8)**

| Pin Number | Pin Name                                                             |
|------------|----------------------------------------------------------------------|
| M5         | BSCANP                                                               |
| M6         | PLLVD00                                                              |
| M8         | VDD                                                                  |
| M9         | VSS                                                                  |
| M10        | VSS                                                                  |
| M11        | VSS                                                                  |
| M12        | VSS                                                                  |
| M13        | VDD                                                                  |
| M15        | VCCQ33                                                               |
| M16        | PE6 / IRQ6 / D14 / MTIOC0A / TIOC0D / RXD1 / MISO0 / TRACEDATA6      |
| M18        | P70 / IRQ0 / D16 / MTIOC6D / RTS1# / USB_OVRCUR / TRACECLK / ENCIF00 |
| M19        | PT4 / CS3# / PO29                                                    |
| M20        | P71 / D17 / POE0# / POE10# / TOC2 / SCK1 / TRACECTL / ENCIF01        |
| N1         | VSS                                                                  |
| N2         | MD0                                                                  |
| N3         | RSTOUT#                                                              |
| N5         | RES#                                                                 |
| N6         | PLLVS0                                                               |
| N8         | VDD                                                                  |
| N9         | VSS                                                                  |
| N10        | VDD                                                                  |
| N11        | VDD                                                                  |
| N12        | VDD                                                                  |
| N13        | VDD                                                                  |
| N15        | PE2 / IRQ2 / D10 / MTCLKC / TIOCB4 / SSL02 / TRACEDATA2              |
| N16        | PE4 / D12 / MTIOC0B / TIOCC0 / RTS1# / SSL00 / TRACEDATA4            |
| N18        | PE5 / D13 / MTIOC0C / TIOCC3 / TXD1 / MOSI0 / TRACEDATA5             |
| N19        | PT2 / TIOCA1 / TIOCB1 / PO27                                         |
| N20        | PT3 / IRQ11 / TIOCA0 / TIOCB0 / PO28 / CTS2#                         |
| P1         | VSS_USB                                                              |
| P2         | VDD33_USB                                                            |
| P3         | USB_RREF                                                             |
| P5         | P31 / USB_VBUSEN                                                     |
| P6         | VCCQ33                                                               |
| P15        | P06 / D6 / MTIOC2B / TIOCB0                                          |
| P16        | P07 / D7 / MTIOC2A / TIOCB1                                          |
| P18        | PE3 / IRQ3 / D11 / MTIOC0D / TIOCB5 / CTS1# / SSL01 / TRACEDATA3     |
| P19        | PT0 / IRQ0 / TIOCA3 / TIOCB3 / PO25 / SCK2 / ENCIF07                 |
| P20        | PT1 / TIOCA2 / TIOCB2 / PO26 / RTS2#                                 |
| R1         | USB_DP                                                               |
| R2         | USB_DM                                                               |
| R3         | P30 / CRXD0 / USB_VBUSIN                                             |
| R5         | PN0 / MTIOC8D / SSL10                                                |
| R6         | PN2 / IRQ10 / MTIOC8B / MOSI1                                        |
| R7         | PG0 / A1 / PO2                                                       |

**Table 1.5 Pin Assignments (320-Pin FBGA) (6 / 8)**

| Pin Number | Pin Name                                              |
|------------|-------------------------------------------------------|
| R8         | PG2 / A3 / PO4 / TOC0 / RSPCK1                        |
| R9         | PG7 / A8 / PO9                                        |
| R10        | PH2 / A11 / MTIOC2A / PO12                            |
| R11        | PH4 / IRQ4 / A13 / PO14                               |
| R12        | PH6 / A15 / MTIOC7D / RTS0#                           |
| R13        | P23 / A0 / MTIC5U / TXD0 / DACK1                      |
| R14        | P27 / A20 / MTIOC8C / TIOCB0 / RTS0#                  |
| R15        | P47 / WE3#/DQMUU/AH# / MTIOC6C                        |
| R16        | VCCQ33                                                |
| R18        | VCCQ33                                                |
| R19        | PS6 / IRQ14 / TIOCA5 / TIOCB5 / PO23 / RXD2 / ENCIF06 |
| R20        | PS7 / TIOCA4 / TIOCB4 / PO24 / TXD2                   |
| T1         | DVDD_USB                                              |
| T2         | VDD33_USB                                             |
| T3         | P32 / IRQ10 / USB_OVRCUR                              |
| T5         | PC6 / TCLKC / SCL1 / CRXD0 / DREQ0 / USB_VBUSIN       |
| T6         | P37 / WE1#/DQMLU / PO1                                |
| T7         | P36 / WE0#/DQMLL / PO0                                |
| T8         | PG3 / A4 / PO5 / TIC1 / MISO1                         |
| T9         | PG6 / A7 / TCLKB / PO8 / SSL11                        |
| T10        | PH3 / A12 / MTIOC1B / PO13                            |
| T11        | VCCQ33                                                |
| T12        | PH5 / A14 / PO15                                      |
| T13        | VCCQ33                                                |
| T14        | P26 / A19 / MTIOC8D / DREQ1                           |
| T15        | VCCQ33                                                |
| T16        | VSS                                                   |
| T18        | VSS                                                   |
| T19        | PE0 / D8 / MTIOC1B / TIOCB2 / TRACEDATA0              |
| T20        | PE1 / D9 / MTCLKD / TIOCB3 / SSL03 / TRACEDATA1       |
| U1         | P60 / SPBSSL / CTXD0 / TEND0                          |
| U2         | P63 / SPBMO/SPBIO0                                    |
| U3         | PN1 / MTIOC8C / PO21 / MISO1                          |
| U18        | P00 / D0 / MTIOC6A / TIOCA1 / ADTRG1 / TRACECTL       |
| U19        | P04 / D4 / MTIOC3C / TIOCA5                           |
| U20        | P03 / D3 / MTIC5U / TIOCA4                            |
| V1         | P61 / SPBIO3 / CTXD1 / DACK0                          |
| V2         | P64 / SPBBI/SPBIO1                                    |
| V3         | PN3 / MTIOC8A / RSPCK1                                |
| V4         | PN4 / IRQ12 / MTIOC6C / TIOCC6 / SSL11                |
| V5         | PC7 / TIC0 / SDA1 / CRXD1                             |
| V6         | PG1 / A2 / PO3                                        |
| V7         | PG4 / A5 / PO6 / TOC1 / MOSI1                         |
| V8         | PG5 / A6 / TCLKA / PO7 / SSL10                        |
| V9         | PH0 / A9 / PO10                                       |

**Table 1.5 Pin Assignments (320-Pin FBGA) (7 / 8)**

| Pin Number | Pin Name                                                  |
|------------|-----------------------------------------------------------|
| V10        | PH1 / A10 / MTIOC2B / PO11                                |
| V11        | PH7 / A16 / MTIC5W                                        |
| V12        | P20 / A17 / MTCLKD                                        |
| V13        | P21 / IRQ1 / CS0# / MTIC5V / TIOCB1 / CTS0#               |
| V14        | VSS                                                       |
| V15        | P45 / CS2#                                                |
| V16        | P46 / CKE                                                 |
| V17        | PS2 / MTIOC7C / SSIWS0                                    |
| V18        | P05 / D5 / MTIOC3A                                        |
| V19        | P01 / D1 / MTIC5W / TIOCA2                                |
| V20        | P02 / D2 / MTIC5V / TIOCA3                                |
| W1         | P62 / SPBCLK                                              |
| W2         | P65 / SPBIO2 / DREQ0                                      |
| W3         | PN5 / IRQ5 / MTIOC6A / TIOCD9                             |
| W4         | PN6 / MTIOC3C / TIOCC9 / MCLK3                            |
| W5         | PP0 / POE8# / TEND0 / MCLK2                               |
| W6         | PP2 / MTIOC0C / TCLKH / MCLK1                             |
| W7         | PP4 / MTIOC0A / MCLK0                                     |
| W8         | PP6 / TIOCA11 / RXD1 / TRACECTL / ENCIF06                 |
| W9         | PP7 / TCLKF / TCLKH / SCK1 / DACK1 / TRACECLK             |
| W10        | PR1 / IRQ9 / POE4# / CTS1# / TEND1 / TRACEDATA1           |
| W11        | PR3 / TIOCA10 / TIOCB10 / TRACEDATA3 / ENCIF01            |
| W12        | PR5 / TIOCA8 / TIOCB8 / TRACEDATA5 / ENCIF03              |
| W13        | P24 / IRQ12 / RD/WR# / RXD0                               |
| W14        | P22 / IRQ2 / RD# / MTIOC7B / TIOCD0 / SCK0                |
| W15        | P44 / IRQ12 / WAIT# / TCLKD / ADTRG0 / CTS0#              |
| W16        | P43 / WE2#/DQMUL / MTIOC8B / USB_VBUSEN                   |
| W17        | PS1 / IRQ1 / MTIOC7B / SSISCK0                            |
| W18        | PS3 / MTIOC7A / SSIRXD0                                   |
| W19        | PS4 / MTIOC6D / SSITXD0                                   |
| W20        | PS5 / MTIOC6B                                             |
| Y1         | VSS                                                       |
| Y2         | P67 / IRQ15 / GTIOC3B / CTXD0 / TEND0 / USB_OVRCUR        |
| Y3         | P66 / IRQ14 / GTIOC3A / CTXD1 / DACK0 / USB_VBUSEN        |
| Y4         | PN7 / MTIOC3A / TIOCD6 / DREQ0 / MDAT3                    |
| Y5         | PP1 / MTIOC0D / DACK0 / MDAT2                             |
| Y6         | PP3 / MTIOC0B / TCLKC / MDAT1                             |
| Y7         | PP5 / PO22 / MDAT0                                        |
| Y8         | VSS                                                       |
| Y9         | PR0 / TCLKE / TCLKG / TXD1 / DREQ1 / TRACEDATA0 / ENCIF07 |
| Y10        | PR2 / TIOCA11 / TIOCB11 / RTS1# / TRACEDATA2 / ENCIF00    |
| Y11        | PR4 / TIOCA9 / TIOCB9 / TRACEDATA4 / ENCIF02              |
| Y12        | PR6 / TIOCA7 / TIOCB7 / TRACEDATA6 / ENCIF04              |
| Y13        | PR7 / TIOCA6 / TIOCB6 / TRACEDATA7 / ENCIF05              |
| Y14        | P25 / A18 / MTCLKC / TEND1                                |

**Table 1.5 Pin Assignments (320-Pin FBGA) (8 / 8)**

| Pin Number | Pin Name                              |
|------------|---------------------------------------|
| Y15        | P41 / BS# / SCK0                      |
| Y16        | P42 / MTIOC7C / RXD0                  |
| Y17        | P40 / MTIOC8A / TXD0                  |
| Y18        | PS0 / MTIOC7D / AUDIO_CLK             |
| Y19        | P10 / IRQ0 / CKIO / TIOCA0 / TRACECLK |
| Y20        | VSS                                   |

**Table 1.6 Pin Assignments (176-Pin HLQFP) (1 / 4)**

| Pin Number | Pin Name                                                        |
|------------|-----------------------------------------------------------------|
| 1          | PC3 / ETH0_RXC / ETH0_RXDV / RXD4 / SCL0 / CRXD1                |
| 2          | VCCQ33                                                          |
| 3          | VSS                                                             |
| 4          | VDD                                                             |
| 5          | P82 / ETH0_TXEN / ETH1_CRS / TIOCD3 / SCK4 / RTS3# / USB_OVRCUR |
| 6          | P85 / IRQ5 / CLKOUT25M0 / TXD4 / SCK4 / USB_VBUSEN              |
| 7          | ERROROUT#                                                       |
| 8          | P35 / NMI                                                       |
| 9          | TRST#                                                           |
| 10         | P33 / TDO                                                       |
| 11         | P34 / TDI                                                       |
| 12         | TMS                                                             |
| 13         | TCK                                                             |
| 14         | BSCANP                                                          |
| 15         | VDD                                                             |
| 16         | VSS                                                             |
| 17         | MD2                                                             |
| 18         | MD1                                                             |
| 19         | PLLVDD1                                                         |
| 20         | PLLVSS1                                                         |
| 21         | OSCTH                                                           |
| 22         | VCCQ33                                                          |
| 23         | EXTAL                                                           |
| 24         | XTAL                                                            |
| 25         | VSS                                                             |
| 26         | MD0                                                             |
| 27         | PLLVDD0                                                         |
| 28         | PLLVSS0                                                         |
| 29         | RES#                                                            |
| 30         | RSTOUT#                                                         |
| 31         | VDD                                                             |
| 32         | VSS                                                             |
| 33         | VDD33_USB                                                       |
| 34         | VSS_USB                                                         |
| 35         | USB_RREF                                                        |
| 36         | USB_DM                                                          |
| 37         | USB_DP                                                          |
| 38         | VDD33_USB                                                       |
| 39         | DVDD_USB                                                        |
| 40         | P30 / CRXD0 / USB_VBUSIN                                        |
| 41         | P60 / SPBSSL / CTXD0 / TEND0                                    |
| 42         | P61 / SPBIO3 / CTXD1 / DACK0                                    |
| 43         | VCCQ33                                                          |
| 44         | P62 / SPBCLK                                                    |

**Table 1.6 Pin Assignments (176-Pin HLQFP) (2 / 4)**

| Pin Number | Pin Name                                    |
|------------|---------------------------------------------|
| 45         | VSS                                         |
| 46         | P63 / SPBMO/SPBIO0                          |
| 47         | P64 / SPBMI/SPBIO1                          |
| 48         | P65 / SPBIO2 / DREQ0                        |
| 49         | VSS                                         |
| 50         | VDD                                         |
| 51         | P36 / WE0#/DQMLL / PO0                      |
| 52         | P37 / WE1#/DQMLU / PO1                      |
| 53         | PG0 / A1 / PO2                              |
| 54         | PG1 / A2 / PO3                              |
| 55         | VCCQ33                                      |
| 56         | PG2 / A3 / PO4 / TOC0 / RSPCK1              |
| 57         | PG3 / A4 / PO5 / TIC1 / MISO1               |
| 58         | PG4 / A5 / PO6 / TOC1 / MOSI1               |
| 59         | PG5 / A6 / TCLKA / PO7 / SSL10              |
| 60         | PG6 / A7 / TCLKB / PO8 / SSL11              |
| 61         | PG7 / A8 / PO9                              |
| 62         | PH0 / A9 / PO10                             |
| 63         | PH1 / A10 / MTIOC2B / PO11                  |
| 64         | PH2 / A11 / MTIOC2A / PO12                  |
| 65         | PH3 / A12 / MTIOC1B / PO13                  |
| 66         | VDD                                         |
| 67         | VSS                                         |
| 68         | PH4 / IRQ4 / A13 / PO14                     |
| 69         | PH5 / A14 / PO15                            |
| 70         | PH6 / A15 / MTIOC7D / RTS0#                 |
| 71         | PH7 / A16 / MTIC5W                          |
| 72         | P24 / IRQ12 / RD/WR# / RXD0                 |
| 73         | P21 / IRQ1 / CS0# / MTIC5V / TIOCB1 / CTS0# |
| 74         | P22 / IRQ2 / RD# / MTIOC7B / TIOCD0 / SCK0  |
| 75         | P23 / A0 / MTIC5U / TXD0 / DACK1            |
| 76         | P20 / A17 / MTCLKD                          |
| 77         | P25 / A18 / MTCLKC / TEND1                  |
| 78         | P26 / A19 / MTIOC8D / DREQ1                 |
| 79         | P27 / A20 / MTIOC8C / TIOCB0 / RTS0#        |
| 80         | VDD                                         |
| 81         | VSS                                         |
| 82         | P42 / MTIOC7C / RXD0                        |
| 83         | P40 / MTIOC8A / TXD0                        |
| 84         | P43 / WE2#/DQMUL / MTIOC8B / USB_VBUSEN     |
| 85         | P47 / WE3#/DQMUU/AH# / MTIOC6C              |
| 86         | VCCQ33                                      |
| 87         | P10 / IRQ0 / CKIO / TIOCA0 / TRACECLK       |
| 88         | VSS                                         |
| 89         | P00 / D0 / MTIOC6A / TIOCA1 / TRACECTL      |

**Table 1.6 Pin Assignments (176-Pin HLQFP) (3 / 4)**

| Pin Number | Pin Name                                                               |
|------------|------------------------------------------------------------------------|
| 90         | P01 / D1 / MTIC5W / TIOCA2                                             |
| 91         | P02 / D2 / MTIC5V / TIOCA3                                             |
| 92         | VCCQ33                                                                 |
| 93         | P03 / D3 / MTIC5U / TIOCA4                                             |
| 94         | P04 / D4 / MTIOC3C / TIOCA5                                            |
| 95         | P05 / D5 / MTIOC3A                                                     |
| 96         | P06 / D6 / MTIOC2B / TIOCB0                                            |
| 97         | P07 / D7 / MTIOC2A / TIOCB1                                            |
| 98         | PE0 / D8 / MTIOC1B / TIOCB2 / TRACEDATA0                               |
| 99         | PE1 / D9 / MTCLKD / TIOCB3 / SSL03 / TRACEDATA1                        |
| 100        | VSS                                                                    |
| 101        | PE2 / IRQ2 / D10 / MTCLKC / TIOCB4 / SSL02 / TRACEDATA2                |
| 102        | PE3 / IRQ3 / D11 / MTIOC0D / TIOCB5 / CTS1# / SSL01 / TRACEDATA3       |
| 103        | PE4 / D12 / MTIOC0B / TIOCC0 / RTS1# / SSL00 / TRACEDATA4              |
| 104        | PE5 / D13 / MTIOC0C / TIOCC3 / TXD1 / MOSI0 / TRACEDATA5               |
| 105        | PE6 / IRQ6 / D14 / MTIOC0A / TIOCD0 / RXD1 / MISO0 / TRACEDATA6        |
| 106        | PE7 / D15 / MTIOC7A / TIOCD3 / POE8# / SCK1 / RSPCK0 / TRACEDATA7      |
| 107        | VSS                                                                    |
| 108        | VDD                                                                    |
| 109        | P70 / IRQ0 / D16 / MTIOC6D / RTS1# / USB_OVRCUR / TRACECLK             |
| 110        | P71 / D17 / POE0# / POE10# / TOC2 / SCK1 / TRACECTL                    |
| 111        | P72 / D18 / MTIOC1A / TIC2 / TXD1 / SSITXD0 / TRACEDATA0               |
| 112        | P73 / IRQ3 / D19 / MTCLKB / RXD1 / SSIRXD0 / TRACEDATA1                |
| 113        | P74 / D20 / MTCLKA / CTS1# / SSL03 / SSISCK0 / TRACEDATA2              |
| 114        | P75 / IRQ13 / D21 / MTIOC4D / GTIOC2B / SSL00 / TRACEDATA3             |
| 115        | P76 / D22 / MTIOC4B / GTIOC2A / SSL01 / SSIWS0 / TRACEDATA4            |
| 116        | P77 / D23 / MTIOC4C / GTIOC1B / RSPCK0 / TRACEDATA5                    |
| 117        | PA0 / D24 / MTIOC4A / GTIOC1A / MOSI0 / TRACEDATA6 / MDAT3             |
| 118        | PA1 / D25 / MTIOC3D / GTIOC0B / MISO0 / AUDIO_CLK / TRACEDATA7 / MCLK3 |
| 119        | VSS                                                                    |
| 120        | VDD                                                                    |
| 121        | PA2 / D26 / MTIOC3B / GTIOC0A / SSL02 / DREQ2 / MDAT2                  |
| 122        | PA3 / D27 / ETHSWSECOUT / GTETRG / TIOCA2 / SCK2 / DACK2 / MCLK2       |
| 123        | PA4 / D28 / ETH1_INT / TIOCA3 / ADTRG0 / RXD2 / TEND2 / MDAT1          |
| 124        | PA5 / D29 / ETH0_INT / ETH1_TXER / TIOCA4 / TXD2 / MCLK1               |
| 125        | PA6 / IRQ6 / D30 / A21 / GTIOC3A / CTS2# / MDAT0                       |
| 126        | VCCQ33                                                                 |
| 127        | PA7 / IRQ7 / D31 / A22 / MTIOC6B / GTIOC3B / RTS2# / MCLK0             |
| 128        | VDD                                                                    |
| 129        | VSS                                                                    |
| 130        | P13 / RAS# / MTIOC4C / GTIOC1B                                         |
| 131        | P14 / CAS# / MTIOC4A / GTIOC1A                                         |
| 132        | P15 / CS3# / CKE / MTIOC3D / GTIOC0B                                   |
| 133        | P16 / CS4# / CS2# / MTIOC3B / GTIOC0A                                  |
| 134        | P17 / CS5# / ETH1_TXER / PHYRESETOUT# / ADTRG0                         |

**Table 1.6 Pin Assignments (176-Pin HLQFP) (4 / 4)**

| Pin Number | Pin Name                                                           |
|------------|--------------------------------------------------------------------|
| 135        | VCCQ33                                                             |
| 136        | VREFH0                                                             |
| 137        | VREFL0                                                             |
| 138        | AVSS0                                                              |
| 139        | AVCC0                                                              |
| 140        | AN000                                                              |
| 141        | AN001                                                              |
| 142        | AN002                                                              |
| 143        | AN003                                                              |
| 144        | AN004                                                              |
| 145        | AN005                                                              |
| 146        | AN006                                                              |
| 147        | AN007                                                              |
| 148        | VDD                                                                |
| 149        | VSS                                                                |
| 150        | P51 / IRQ1 / PHYLINK1 / RSPCK2                                     |
| 151        | P54 / CLKOUT25M1 / MOSI2                                           |
| 152        | P56 / BS# / ETH1_TXER                                              |
| 153        | PD5 / A21 / ETH1_TXD3 / ETH0_TXD0 / TIC0 / SSL20 / MCLK3           |
| 154        | PD6 / A22 / ETH1_TXD2 / ETH0_TXD1 / TIC1 / MISO2 / MCLK2           |
| 155        | PD7 / ETH1_TXD1 / MTIOC4D / GTIOC2B / TOC0                         |
| 156        | P86 / ETH1_TXD0 / MTIOC4B / GTIOC2A / TOC1 / RSPCK2                |
| 157        | P87 / A23 / ETH1_TXC / ETH0_RXD0 / MTIOC4C / GTIOC1B / MCLK1       |
| 158        | PF5 / ETH1_TXEN / MTIOC4A / GTIOC1A / TIC2                         |
| 159        | VCCQ33                                                             |
| 160        | VDD                                                                |
| 161        | VSS                                                                |
| 162        | PF6 / ETH1_RXD0 / MTIOC3D / GTIOC0B / TOC2                         |
| 163        | PB7 / ETH1_RXD1 / MTIOC3B / GTIOC0A / TOC3                         |
| 164        | PC0 / WAIT# / ETH1_RXD2 / GTETRQ / SCL1 / MDAT3                    |
| 165        | PC1 / IRQ9 / ETH1_RXD3 / PHYLINK0 / SDA1 / MDAT2                   |
| 166        | PB0 / ETH1_RXDV / MTCLKB / TCLKD / TIC3                            |
| 167        | PB1 / ETH1_RXER / MTCLKA / TCLKC / CTS4#                           |
| 168        | PB2 / ETH1_RXC / ETH0_RXD1 / MTIOC1A / SSL30 / MDAT1               |
| 169        | VCCQ33                                                             |
| 170        | PB3 / IRQ3 / CS1# / ETH1_CRS / PHYRESETOUT# / TXD3 / CTXD1 / MCLK0 |
| 171        | PB4 / A24 / ETH1_COL / ETH0_RXER / RXD3 / MOSI3 / MDAT0            |
| 172        | PB5 / ETH_MDIO / TCLKB / POE0# / POE10# / CTS3# / RSPCK3           |
| 173        | VSS                                                                |
| 174        | VDD                                                                |
| 175        | PB6 / ETH_MDC / TCLKA / SCK3 / RTS4# / MISO3                       |
| 176        | PC2 / ETH0_TXC / ETH1_RXD2 / SDA0                                  |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (1 / 10)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus   | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, ECATC*1, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
|------------|-----------------------------------|----------|-------|-----------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------|-----------|---------|
| A1         | VSS                               |          |       |                                               |                                                                             |                                     |           |         |
| A2         |                                   | PC2      |       |                                               | ETH0_TXC /<br>ETH1_RXD2 /<br>CATI2CDATA /<br>SDA0                           |                                     |           |         |
| A3         |                                   | PJ3      |       |                                               | ETH0_TXD0                                                                   |                                     | IRQ11     | ADTRG0  |
| A4         |                                   | PJ1      |       |                                               | ETH0_TXD2 /<br>CATLEDSTER /<br>RSPCK3                                       |                                     |           |         |
| A5         |                                   | PF7      | A25   |                                               | ETH0_TXER /<br>RTS3# / SSL30                                                |                                     | IRQ7      |         |
| A6         |                                   | PB4      | A24   |                                               | ETH1_COL /<br>ETH0_RXER /<br>CATSYNC0 /<br>CATLATCH0 / RXD3<br>/ MOSI3      | MDAT0                               |           |         |
| A7         |                                   | PB0      |       | MTCLKB / TCLKD /<br>TIC3                      | ETH1_RXDV                                                                   |                                     |           |         |
| A8         |                                   | PC0      | WAIT# | GTETRG                                        | ETH1_RXD2 / SCL1                                                            | MDAT3                               |           |         |
| A9         |                                   | PF6      |       | MTIOC3D /<br>GTIOC0B / TOC2                   | ETH1_RXD0                                                                   |                                     |           |         |
| A10        | VCCQ33                            |          |       |                                               |                                                                             |                                     |           |         |
| A11        |                                   | P54      |       |                                               | CLKOUT25M1 /<br>MOSI2                                                       |                                     |           |         |
| A12        | VSS                               |          |       |                                               |                                                                             |                                     |           |         |
| A13        |                                   |          |       |                                               |                                                                             |                                     |           | AN007   |
| A14        |                                   |          |       |                                               |                                                                             |                                     |           | AN005   |
| A15        |                                   |          |       |                                               |                                                                             |                                     |           | AN002   |
| A16        | AVCC0                             |          |       |                                               |                                                                             |                                     |           |         |
| A17        | AVCC1                             |          |       |                                               |                                                                             |                                     |           |         |
| A18        | VREFH1                            |          |       |                                               |                                                                             |                                     |           |         |
| A19        |                                   | P17      | CS5#  |                                               | ETH1_TXER /<br>PHYRESETOUT#                                                 |                                     |           | ADTRG0  |
| A20        | VSS                               |          |       |                                               |                                                                             |                                     |           |         |
| B1         |                                   | PJ5      |       | TIOC0D0                                       | ETH0_RXD1 / RXD3                                                            |                                     |           |         |
| B2         |                                   | PJ4      |       |                                               | ETH0_RXD0 / TXD3                                                            |                                     |           |         |
| B3         |                                   | PC3      |       |                                               | ETH0_RXC /<br>ETH0_RXDV /<br>CATI2CCLK / RXD4<br>/ SCL0 / CRXD1             |                                     |           |         |
| B4         |                                   | PJ2      |       |                                               | ETH0_TXD1 /<br>MISO3                                                        |                                     | IRQ10     |         |
| B5         |                                   | PJ0      |       |                                               | ETH0_TXD3 /<br>CATLEDERR /<br>MOSI3                                         |                                     | IRQ8      |         |
| B6         |                                   | PB5      |       | TCLKB / POE0# /<br>POE10#                     | ETH_MDIO / CTS3#<br>/ RSPCK3                                                |                                     |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (2 / 10)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus         | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa    |
|------------|-----------------------------------|----------|-------------|-----------------------------------------------|----------------------------------------------------------------------------|-------------------------------------|-----------|------------|
| B7         |                                   | PB2      |             | MTIOC1A                                       | ETH1_RXC / ETH0_RXD1 / CATSYNC1 / CATLATCH1 / SSL30                        | MDAT1                               |           |            |
| B8         |                                   | PC1      |             |                                               | ETH1_RXD3 / PHYLINK0 / SDA1                                                | MDAT2                               | IRQ9      |            |
| B9         |                                   | PB7      |             | MTIOC3B / GTIOC0A / TOC3                      | ETH1_RXD1                                                                  |                                     |           |            |
| B10        |                                   | P86      |             | MTIOC4B / GTIOC2A / TOC1                      | ETH1_TXD0 / RSPCK2                                                         |                                     |           | AN1_ANE X0 |
| B11        |                                   | PD7      |             | MTIOC4D / GTIOC2B / TOC0                      | ETH1_TXD1                                                                  |                                     |           | AN115      |
| B12        |                                   | P52      |             |                                               | ETH0_INT / SSL20                                                           |                                     |           |            |
| B13        |                                   |          |             |                                               |                                                                            |                                     |           | AN006      |
| B14        |                                   |          |             |                                               |                                                                            |                                     |           | AN003      |
| B15        |                                   |          |             |                                               |                                                                            |                                     |           | AN001      |
| B16        | AVSS0                             |          |             |                                               |                                                                            |                                     |           |            |
| B17        | AVSS1                             |          |             |                                               |                                                                            |                                     |           |            |
| B18        | VREFL1                            |          |             |                                               |                                                                            |                                     |           |            |
| B19        |                                   | P16      | CS4# / CS2# | MTIOC3B / GTIOC0A                             |                                                                            |                                     |           |            |
| B20        |                                   | P15      | CS3# / CKE  | MTIOC3D / GTIOC0B                             |                                                                            |                                     |           |            |
| C1         |                                   | PJ7      |             |                                               | ETH0_RXD3 / CATLED RUN / CTS3#                                             |                                     | IRQ15     |            |
| C2         |                                   | PJ6      |             |                                               | ETH0_RXD2 / CATIRQ / SCK3                                                  |                                     | IRQ14     |            |
| C3         |                                   | PU2      |             | TIOC9D                                        | ETH2_CRS / RXD3                                                            |                                     | IRQ2      |            |
| C4         |                                   | PL7      |             |                                               | ETH2_RXDV                                                                  |                                     | IRQ15     |            |
| C5         |                                   | PL5      |             | TIOCA8                                        | ETH2_RXD2                                                                  |                                     |           |            |
| C6         |                                   | PB6      |             | TCLKA                                         | ETH_MDC / SCK3 / RTS4# / MISO3                                             |                                     |           |            |
| C7         |                                   | PB3      | CS1#        |                                               | ETH1_CRS / PHYRESETOUT# / TXD3 / CTXD1                                     | MCLK0                               | IRQ3      |            |
| C8         |                                   | PB1      |             | MTCLKA / TCLKC                                | ETH1_RXER / CTS4#                                                          |                                     |           |            |
| C9         |                                   | PF5      |             | MTIOC4A / GTIOC1A / TIC2                      | ETH1_TXEN                                                                  |                                     |           |            |
| C10        |                                   | P87      | A23         | MTIOC4C / GTIOC1B                             | ETH1_TXC / ETH0_RXD0                                                       | MCLK1                               |           | AN1_ANE X1 |
| C11        |                                   | PD6      | A22         | TIC1                                          | ETH1_TXD2 / ETH0_TXD1 / MISO2                                              | MCLK2                               |           | AN114      |
| C12        |                                   | P53      |             |                                               | ETH1_INT / MISO2                                                           |                                     |           |            |
| C13        |                                   | P51      |             |                                               | PHYLINK1 / RSPCK2                                                          |                                     | IRQ1      |            |
| C14        |                                   |          |             |                                               |                                                                            |                                     |           | AN004      |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (3 / 10)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus   | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa        |
|------------|-----------------------------------|----------|-------|-----------------------------------------------|----------------------------------------------------------------------------|-------------------------------------|-----------|----------------|
| C15        |                                   |          |       |                                               |                                                                            |                                     |           | AN000          |
| C16        | VREFL0                            |          |       |                                               |                                                                            |                                     |           |                |
| C17        | VREFH0                            |          |       |                                               |                                                                            |                                     |           |                |
| C18        |                                   | PD2      | WAIT# |                                               |                                                                            |                                     |           | AN110          |
| C19        |                                   | P14      | CAS#  | MTIOC4A / GTIOC1A                             |                                                                            |                                     |           |                |
| C20        |                                   | P13      | RAS#  | MTIOC4C / GTIOC1B                             |                                                                            |                                     |           |                |
| D1         |                                   | P81      |       | TIOCC0                                        | ETH0_RXER / CTS4#                                                          |                                     |           |                |
| D2         |                                   | P80      |       | TIOCC3                                        | ETH0_RXDV / RTS4#                                                          |                                     | IRQ8      |                |
| D3         |                                   | PU3      |       | TIOCD6                                        | ETH2_COL / TXD3                                                            |                                     |           |                |
| D18        |                                   | PD0      | CS4#  |                                               |                                                                            |                                     |           | AN108          |
| D19        |                                   | P96      |       | POE0# / POE10#                                |                                                                            |                                     |           | AN106          |
| D20        |                                   | P95      |       | MTCLKA                                        | CTS2#                                                                      |                                     | IRQ13     | AN105          |
| E1         |                                   | P84      |       |                                               | ETH0_COL / CATLINKACT1 / RXD4                                              |                                     |           |                |
| E2         |                                   | P82      |       | TIOCD3                                        | ETH0_TXEN / ETH1_CRS / SCK4 / RTS3# / USB_OVRCUR                           |                                     |           |                |
| E3         |                                   | PU1      |       | TIOCA11                                       | ETH2_RXC / SCK3                                                            |                                     |           |                |
| E5         |                                   | PU0      |       | TIOCA10                                       | ETH2_RXER                                                                  |                                     |           |                |
| E6         |                                   | PL6      |       | TIOCA9                                        | ETH2_RXD3                                                                  |                                     |           |                |
| E7         |                                   | PL4      |       |                                               | ETH2_RXD1                                                                  |                                     | IRQ4      |                |
| E8         |                                   | PL2      |       | TIOCA6                                        | ETH2_TXEN                                                                  |                                     |           | ADTRG1         |
| E9         |                                   | PL0      |       | TIOCB9                                        | ETH2_TXD0                                                                  |                                     |           |                |
| E10        |                                   | PK7      |       | TIOCB7                                        | ETH2_TXD2                                                                  |                                     |           |                |
| E11        |                                   | PK6      |       | TIOCB6                                        | ETH2_TXD3                                                                  |                                     |           |                |
| E12        |                                   | PD5      | A21   | TIC0                                          | ETH1_TXD3 / ETH0_TXD0 / SSL20                                              | MCLK3                               |           | AN113          |
| E13        |                                   | P56      | BS#   |                                               | ETH1_TXER                                                                  |                                     |           |                |
| E14        |                                   | PD4      |       |                                               | ETH2_INT                                                                   |                                     |           | AN112          |
| E15        | VCCQ33                            |          |       |                                               |                                                                            |                                     |           |                |
| E16        |                                   | PD1      | CS1#  |                                               |                                                                            |                                     |           | AN109          |
| E18        |                                   | P97      | A25   |                                               |                                                                            |                                     | IRQ7      | ADTRG1 / AN107 |
| E19        |                                   | P94      |       | MTCLKB                                        | RTS2#                                                                      |                                     | IRQ4      | AN104          |
| E20        |                                   | P93      |       | MTIOC1A / TIC3                                | SCK2                                                                       | ENCIF07                             |           | AN103          |
| F1         |                                   | PC4      |       | TCLKH                                         | CAT12CCLK / SCL0                                                           |                                     |           |                |
| F2         |                                   | P83      |       |                                               | ETH0_CRS / CATLINKACT0 / TXD4                                              |                                     | IRQ11     |                |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (4 / 10)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus         | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
|------------|-----------------------------------|----------|-------------|-----------------------------------------------|----------------------------------------------------------------------------|-------------------------------------|-----------|---------|
| F3         |                                   | P85      |             |                                               | CLKOUT25M0 / TXD4 / SCK4 / USB_VBUSEN                                      |                                     | IRQ5      |         |
| F5         |                                   | PU4      |             | TIOCC9                                        | MII2_MDC / CTS3#                                                           |                                     |           |         |
| F6         | VSS                               |          |             |                                               |                                                                            |                                     |           |         |
| F7         | VCCQ33                            |          |             |                                               |                                                                            |                                     |           |         |
| F8         |                                   | PL3      |             | TIOCA7                                        | ETH2_RXD0                                                                  |                                     |           |         |
| F9         |                                   | PL1      |             | TIOCB10                                       | ETH2_TXC                                                                   |                                     |           |         |
| F10        |                                   | PK5      |             | TIOCB8                                        | ETH2_TXD1                                                                  |                                     |           |         |
| F11        |                                   | PK4      |             | TIOCB11                                       | ETH2_TXER / MOSI2                                                          |                                     |           |         |
| F12        |                                   | P55      | A24         |                                               | ETHSWSECOUT                                                                |                                     | IRQ5      |         |
| F13        |                                   | P50      | CS1#        |                                               | PHYLINK0                                                                   |                                     | IRQ8      |         |
| F14        |                                   | PD3      |             |                                               | PHYRESETOUT2#                                                              |                                     |           | AN111   |
| F15        |                                   | PK2      | A23         |                                               |                                                                            |                                     |           |         |
| F16        |                                   | P90      | RAS#        | TIOCA5                                        | TXD4                                                                       |                                     |           | AN100   |
| F18        |                                   | P92      | CS5#        | TOC3                                          | RXD2                                                                       |                                     |           | AN102   |
| F19        |                                   | P91      | CAS#        |                                               | TXD2                                                                       | ENCIF06                             |           | AN101   |
| F20        |                                   | P12      |             | MTIOC4B / GTIOC2A                             |                                                                            |                                     |           |         |
| G1         |                                   | PU6      |             | TCLKF                                         | PHYRESETOUT# / CTS4#                                                       |                                     |           |         |
| G2         |                                   | PC5      |             | TCLKG                                         | CAT12CDATA / SDA0                                                          |                                     |           |         |
| G3         | VCCQ33                            |          |             |                                               |                                                                            |                                     |           |         |
| G5         |                                   | PU5      |             | TIOCC6                                        | MII2_MDIO / RTS3#                                                          |                                     | IRQ13     |         |
| G6         |                                   | PM0      |             |                                               | CLKOUT25M2 / TXD4                                                          |                                     |           |         |
| G15        |                                   | PK3      | A24         |                                               |                                                                            |                                     |           |         |
| G16        |                                   | PA7      | D31 / A22   | MTIOC6B / GTIOC3B                             | RTS2#                                                                      | MCLK0                               | IRQ7      |         |
| G18        |                                   | PA4      | D28 / TEND2 | TIOCA3                                        | ETH1_INT / RXD2                                                            | MDAT1                               |           | ADTRG0  |
| G19        |                                   | PA3      | D27 / DACK2 | GTETRG / TIOCA2                               | ETHSWSECOUT / SCK2                                                         | MCLK2                               |           |         |
| G20        |                                   | P11      |             | MTIOC4D / GTIOC2B                             |                                                                            |                                     | IRQ9      |         |
| H1         |                                   | PU7      |             |                                               | CATIRQ / RXD4                                                              |                                     |           |         |
| H2         |                                   | PM1      |             |                                               | CATLEDERR / SCK4                                                           |                                     |           |         |
| H3         |                                   | P35      |             |                                               |                                                                            |                                     | NMI       |         |
| H5         | ERROROUT#                         |          |             |                                               |                                                                            |                                     |           |         |
| H6         | VCCQ33                            |          |             |                                               |                                                                            |                                     |           |         |
| H8         | VDD                               |          |             |                                               |                                                                            |                                     |           |         |
| H9         | VDD                               |          |             |                                               |                                                                            |                                     |           |         |
| H10        | VDD                               |          |             |                                               |                                                                            |                                     |           |         |
| H11        | VDD                               |          |             |                                               |                                                                            |                                     |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (5 / 10)**

| Pin Number   |                                   |          |             | Timer                                | Communication                                             | Others                    |           |         |
|--------------|-----------------------------------|----------|-------------|--------------------------------------|-----------------------------------------------------------|---------------------------|-----------|---------|
| 320-Pin FBGA | Power Supply Clock System Control | I/O Port | Bus         | (MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | (ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | (SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
| H12          | VDD                               |          |             |                                      |                                                           |                           |           |         |
| H13          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| H15          |                                   | PA6      | D30 / A21   | GTIOC3A                              | CTS2#                                                     | MDAT0                     | IRQ6      |         |
| H16          |                                   | PA5      | D29         | TIOCA4                               | ETH0_INT / ETH1_TXER / TXD2                               | MCLK1                     |           |         |
| H18          |                                   | PA2      | D26 / DREQ2 | MTIOC3B / GTIOC0A                    | SSL02                                                     | MDAT2 / ENCIF05           |           |         |
| H19          |                                   | PK0      | CAS#        | PO31                                 |                                                           |                           |           |         |
| H20          |                                   | PK1      | CS5#        |                                      |                                                           |                           |           |         |
| J1           |                                   | PM6      |             | PO19                                 | CATLINKACT0                                               |                           | IRQ6      |         |
| J2           |                                   | PM3      |             | PO16                                 | CATSYNC0 / CATLATCH0                                      |                           |           |         |
| J3           |                                   | PM2      |             | TCLKE                                | CATSYNC1 / CATLATCH1 / RTS4#                              |                           |           |         |
| J5           | TDO                               | P33      |             |                                      |                                                           |                           |           |         |
| J6           | TRST#                             |          |             |                                      |                                                           |                           |           |         |
| J8           | VDD                               |          |             |                                      |                                                           |                           |           |         |
| J9           | VSS                               |          |             |                                      |                                                           |                           |           |         |
| J10          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| J11          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| J12          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| J13          | VDD                               |          |             |                                      |                                                           |                           |           |         |
| J15          | VCCQ33                            |          |             |                                      |                                                           |                           |           |         |
| J16          | TRACEDATA7                        | PA1      | D25         | MTIOC3D / GTIOC0B                    | MISO0                                                     | AUDIO_CLK / MCLK3         |           |         |
| J18          | TRACEDATA6                        | PA0      | D24         | MTIOC4A / GTIOC1A                    | MOSI0                                                     | MDAT3                     |           |         |
| J19          |                                   | PT7      | A22 / DACK2 |                                      |                                                           |                           |           |         |
| J20          |                                   | PT6      | A21 / DREQ2 |                                      |                                                           |                           |           |         |
| K1           |                                   | PM7      |             | PO20                                 | CATLINKACT1                                               |                           |           |         |
| K2           |                                   | PM5      |             | PO18                                 | CATLEDSTER                                                |                           |           |         |
| K3           |                                   | PM4      |             | PO17                                 | CATLEDRUN                                                 |                           |           |         |
| K5           | TDI                               | P34      |             |                                      |                                                           |                           |           |         |
| K6           | PLLVD1                            |          |             |                                      |                                                           |                           |           |         |
| K8           | VDD                               |          |             |                                      |                                                           |                           |           |         |
| K9           | VSS                               |          |             |                                      |                                                           |                           |           |         |
| K10          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| K11          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| K12          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| K13          | VDD                               |          |             |                                      |                                                           |                           |           |         |
| K15          | VSS                               |          |             |                                      |                                                           |                           |           |         |
| K16          | TRACEDATA5                        | P77      | D23         | MTIOC4C / GTIOC1B                    | RSPCK0                                                    |                           |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (6 / 10)**

| Pin Number | Power Supply Clock | I/O Port | Bus         | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
|------------|--------------------|----------|-------------|-----------------------------------------------|----------------------------------------------------------------------------|-------------------------------------|-----------|---------|
| K18        | TRACEDATA4         | P76      | D22         | MTIOC4B / GTIOC2A                             | SSL01                                                                      | SSIWS0                              |           |         |
| K19        | TRACEDATA3         | P75      | D21         | MTIOC4D / GTIOC2B                             | SSL00                                                                      | ENCIF04                             | IRQ13     |         |
| K20        |                    | PT5      | BS# / TEND2 | PO30                                          |                                                                            |                                     |           |         |
| L1         | MD1                |          |             |                                               |                                                                            |                                     |           |         |
| L2         | MD2                |          |             |                                               |                                                                            |                                     |           |         |
| L3         | TMS                |          |             |                                               |                                                                            |                                     |           |         |
| L5         | TCK                |          |             |                                               |                                                                            |                                     |           |         |
| L6         | PLLVS1             |          |             |                                               |                                                                            |                                     |           |         |
| L8         | VDD                |          |             |                                               |                                                                            |                                     |           |         |
| L9         | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| L10        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| L11        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| L12        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| L13        | VDD                |          |             |                                               |                                                                            |                                     |           |         |
| L15        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| L16        | TRACEDATA7         | PE7      | D15         | MTIOC7A / TIOCD3 / POE8#                      | SCK1 / RSPCK0                                                              |                                     |           |         |
| L18        | TRACEDATA0         | P72      | D18         | MTIOC1A / TIC2                                | TXD1                                                                       | SSITXD0 / ENCIF02                   |           |         |
| L19        | TRACEDATA1         | P73      | D19         | MTCLKB                                        | RXD1                                                                       | SSIRXD0 / ENCIF03                   | IRQ3      |         |
| L20        | TRACEDATA2         | P74      | D20         | MTCLKA                                        | CTS1# / SSL03                                                              | SSISCK0                             |           |         |
| M1         | XTAL               |          |             |                                               |                                                                            |                                     |           |         |
| M2         | EXTAL              |          |             |                                               |                                                                            |                                     |           |         |
| M3         | OSCTH              |          |             |                                               |                                                                            |                                     |           |         |
| M5         | BSCANP             |          |             |                                               |                                                                            |                                     |           |         |
| M6         | PLLVDD0            |          |             |                                               |                                                                            |                                     |           |         |
| M8         | VDD                |          |             |                                               |                                                                            |                                     |           |         |
| M9         | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| M10        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| M11        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| M12        | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| M13        | VDD                |          |             |                                               |                                                                            |                                     |           |         |
| M15        | VCCQ33             |          |             |                                               |                                                                            |                                     |           |         |
| M16        | TRACEDATA6         | PE6      | D14         | MTIOC0A / TIOCD0                              | RXD1 / MISO0                                                               |                                     | IRQ6      |         |
| M18        | TRACECLK           | P70      | D16         | MTIOC6D                                       | RTS1# / USB_OVRCUR                                                         | ENCIF00                             | IRQ0      |         |
| M19        |                    | PT4      | CS3#        | PO29                                          |                                                                            |                                     |           |         |
| M20        | TRACECTL           | P71      | D17         | POE0# / POE10# / TOC2                         | SCK1                                                                       | ENCIF01                             |           |         |
| N1         | VSS                |          |             |                                               |                                                                            |                                     |           |         |
| N2         | MD0                |          |             |                                               |                                                                            |                                     |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (7 / 10)**

| Pin Number   |                                   |          |                        | Timer                                | Communication                                             | Others                    |           |         |
|--------------|-----------------------------------|----------|------------------------|--------------------------------------|-----------------------------------------------------------|---------------------------|-----------|---------|
| 320-Pin FBGA | Power Supply Clock System Control | I/O Port | Bus                    | (MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | (ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | (SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
| N3           | RSTOUT#                           |          |                        |                                      |                                                           |                           |           |         |
| N5           | RES#                              |          |                        |                                      |                                                           |                           |           |         |
| N6           | PLLSS0                            |          |                        |                                      |                                                           |                           |           |         |
| N8           | VDD                               |          |                        |                                      |                                                           |                           |           |         |
| N9           | VSS                               |          |                        |                                      |                                                           |                           |           |         |
| N10          | VDD                               |          |                        |                                      |                                                           |                           |           |         |
| N11          | VDD                               |          |                        |                                      |                                                           |                           |           |         |
| N12          | VDD                               |          |                        |                                      |                                                           |                           |           |         |
| N13          | VDD                               |          |                        |                                      |                                                           |                           |           |         |
| N15          | TRACEDATA2                        | PE2      | D10                    | MTCLKC / TIOCB4                      | SSL02                                                     |                           | IRQ2      |         |
| N16          | TRACEDATA4                        | PE4      | D12                    | MTIOC0B / TIOCC0                     | RTS1# / SSL00                                             |                           |           |         |
| N18          | TRACEDATA5                        | PE5      | D13                    | MTIOC0C / TIOCC3                     | TXD1 / MOSI0                                              |                           |           |         |
| N19          |                                   | PT2      |                        | TIOCA1 / TIOCB1 / PO27               |                                                           |                           |           |         |
| N20          |                                   | PT3      |                        | TIOCA0 / TIOCB0 / PO28               | CTS2#                                                     |                           | IRQ11     |         |
| P1           | VSS_USB                           |          |                        |                                      |                                                           |                           |           |         |
| P2           | VDD33_USB                         |          |                        |                                      |                                                           |                           |           |         |
| P3           | USB_RREF                          |          |                        |                                      |                                                           |                           |           |         |
| P5           |                                   | P31      |                        |                                      | USB_VBUSEN                                                |                           |           |         |
| P6           | VCCQ33                            |          |                        |                                      |                                                           |                           |           |         |
| P15          |                                   | P06      | D6                     | MTIOC2B / TIOCB0                     |                                                           |                           |           |         |
| P16          |                                   | P07      | D7                     | MTIOC2A / TIOCB1                     |                                                           |                           |           |         |
| P18          | TRACEDATA3                        | PE3      | D11                    | MTIOC0D / TIOCB5                     | CTS1# / SSL01                                             |                           | IRQ3      |         |
| P19          |                                   | PT0      |                        | TIOCA3 / TIOCB3 / PO25               | SCK2                                                      | ENCIF07                   | IRQ0      |         |
| P20          |                                   | PT1      |                        | TIOCA2 / TIOCB2 / PO26               | RTS2#                                                     |                           |           |         |
| R1           | USB_DP                            |          |                        |                                      |                                                           |                           |           |         |
| R2           | USB_DM                            |          |                        |                                      |                                                           |                           |           |         |
| R3           |                                   | P30      |                        |                                      | CRXD0 / USB_VBUSIN                                        |                           |           |         |
| R5           |                                   | PN0      |                        | MTIOC8D                              | SSL10                                                     |                           |           |         |
| R6           |                                   | PN2      |                        | MTIOC8B                              | MOSI1                                                     |                           | IRQ10     |         |
| R7           |                                   | PG0      | A1                     | PO2                                  |                                                           |                           |           |         |
| R8           |                                   | PG2      | A3                     | PO4 / TOC0                           | RSPCK1                                                    |                           |           |         |
| R9           |                                   | PG7      | A8                     | PO9                                  |                                                           |                           |           |         |
| R10          |                                   | PH2      | A11                    | MTIOC2A / PO12                       |                                                           |                           |           |         |
| R11          |                                   | PH4      | A13                    | PO14                                 |                                                           |                           | IRQ4      |         |
| R12          |                                   | PH6      | A15                    | MTIOC7D                              | RTS0#                                                     |                           |           |         |
| R13          |                                   | P23      | A0 / DACK1             | MTIC5U                               | TXD0                                                      |                           |           |         |
| R14          |                                   | P27      | A20                    | MTIOC8C / TIOCB0                     | RTS0#                                                     |                           |           |         |
| R15          |                                   | P47      | WE3#/<br>DQM0U/<br>AH# | MTIOC6C                              |                                                           |                           |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (8 / 10)**

| Pin Number   |                                   |          |              | Timer                                | Communication                                             | Others                    |           |         |
|--------------|-----------------------------------|----------|--------------|--------------------------------------|-----------------------------------------------------------|---------------------------|-----------|---------|
| 320-Pin FBGA | Power Supply Clock System Control | I/O Port | Bus          | (MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | (ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | (SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
| R16          | VCCQ33                            |          |              |                                      |                                                           |                           |           |         |
| R18          | VCCQ33                            |          |              |                                      |                                                           |                           |           |         |
| R19          |                                   | PS6      |              | TIOCA5 / TIOCB5 / PO23               | RXD2                                                      | ENCIF06                   | IRQ14     |         |
| R20          |                                   | PS7      |              | TIOCA4 / TIOCB4 / PO24               | TXD2                                                      |                           |           |         |
| T1           | DVDD_USB                          |          |              |                                      |                                                           |                           |           |         |
| T2           | VDD33_USB                         |          |              |                                      |                                                           |                           |           |         |
| T3           |                                   | P32      |              |                                      | USB_OVRCUR                                                |                           | IRQ10     |         |
| T5           |                                   | PC6      | DREQ0        | TCLKC                                | SCL1 / CRXD0 / USB_VBUSIN                                 |                           |           |         |
| T6           |                                   | P37      | WE1# / DQMLU | PO1                                  |                                                           |                           |           |         |
| T7           |                                   | P36      | WE0# / DQMLL | PO0                                  |                                                           |                           |           |         |
| T8           |                                   | PG3      | A4           | PO5 / TIC1                           | MISO1                                                     |                           |           |         |
| T9           |                                   | PG6      | A7           | TCLKB / PO8                          | SSL11                                                     |                           |           |         |
| T10          |                                   | PH3      | A12          | MTIOC1B / PO13                       |                                                           |                           |           |         |
| T11          | VCCQ33                            |          |              |                                      |                                                           |                           |           |         |
| T12          |                                   | PH5      | A14          | PO15                                 |                                                           |                           |           |         |
| T13          | VCCQ33                            |          |              |                                      |                                                           |                           |           |         |
| T14          |                                   | P26      | A19 / DREQ1  | MTIOC8D                              |                                                           |                           |           |         |
| T15          | VCCQ33                            |          |              |                                      |                                                           |                           |           |         |
| T16          | VSS                               |          |              |                                      |                                                           |                           |           |         |
| T18          | VSS                               |          |              |                                      |                                                           |                           |           |         |
| T19          | TRACEDATA0                        | PE0      | D8           | MTIOC1B / TIOCB2                     |                                                           |                           |           |         |
| T20          | TRACEDATA1                        | PE1      | D9           | MTCLKD / TIOCB3                      | SSL03                                                     |                           |           |         |
| U1           |                                   | P60      | TEND0        |                                      | CTXD0 / SPBSSL                                            |                           |           |         |
| U2           |                                   | P63      |              |                                      | SPBMO/SPBIO0                                              |                           |           |         |
| U3           |                                   | PN1      |              | MTIOC8C / PO21                       | MISO1                                                     |                           |           |         |
| U18          | TRACECTL                          | P00      | D0           | MTIOC6A / TIOCA1                     |                                                           |                           |           | ADTRG1  |
| U19          |                                   | P04      | D4           | MTIOC3C / TIOCA5                     |                                                           |                           |           |         |
| U20          |                                   | P03      | D3           | MTIC5U / TIOCA4                      |                                                           |                           |           |         |
| V1           |                                   | P61      | DACK0        |                                      | CTXD1 / SPBIO3                                            |                           |           |         |
| V2           |                                   | P64      |              |                                      | SPBMO/SPBIO1                                              |                           |           |         |
| V3           |                                   | PN3      |              | MTIOC8A                              | RSPCK1                                                    |                           |           |         |
| V4           |                                   | PN4      |              | MTIOC6C / TIOCC6                     | SSL11                                                     |                           | IRQ12     |         |
| V5           |                                   | PC7      |              | TIC0                                 | SDA1 / CRXD1                                              |                           |           |         |
| V6           |                                   | PG1      | A2           | PO3                                  |                                                           |                           |           |         |
| V7           |                                   | PG4      | A5           | PO6 / TOC1                           | MOSI1                                                     |                           |           |         |
| V8           |                                   | PG5      | A6           | TCLKA / PO7                          | SSL10                                                     |                           |           |         |
| V9           |                                   | PH0      | A9           | PO10                                 |                                                           |                           |           |         |
| V10          |                                   | PH1      | A10          | MTIOC2B / PO11                       |                                                           |                           |           |         |
| V11          |                                   | PH7      | A16          | MTIC5W                               |                                                           |                           |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (9 / 10)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus            | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, ECATC*1, SCIFA, RSPIa, RIIa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF, Encoder I/F) | Interrupt | S12ADCa |
|------------|-----------------------------------|----------|----------------|-----------------------------------------------|----------------------------------------------------------------------------|-------------------------------------|-----------|---------|
| V12        |                                   | P20      | A17            | MTCLKD                                        |                                                                            |                                     |           |         |
| V13        |                                   | P21      | CS0#           | MTIC5V / TIOCB1                               | CTS0#                                                                      |                                     | IRQ1      |         |
| V14        | VSS                               |          |                |                                               |                                                                            |                                     |           |         |
| V15        |                                   | P45      | CS2#           |                                               |                                                                            |                                     |           |         |
| V16        |                                   | P46      | CKE            |                                               |                                                                            |                                     |           |         |
| V17        |                                   | PS2      |                | MTIOC7C                                       |                                                                            | SSIWS0                              |           |         |
| V18        |                                   | P05      | D5             | MTIOC3A                                       |                                                                            |                                     |           |         |
| V19        |                                   | P01      | D1             | MTIC5W / TIOCA2                               |                                                                            |                                     |           |         |
| V20        |                                   | P02      | D2             | MTIC5V / TIOCA3                               |                                                                            |                                     |           |         |
| W1         |                                   | P62      |                |                                               | SPBCLK                                                                     |                                     |           |         |
| W2         |                                   | P65      | DREQ0          |                                               | SPBIO2                                                                     |                                     |           |         |
| W3         |                                   | PN5      |                | MTIOC6A / TIOCD9                              |                                                                            |                                     | IRQ5      |         |
| W4         |                                   | PN6      |                | MTIOC3C / TIOCC9                              |                                                                            | MCLK3                               |           |         |
| W5         |                                   | PP0      | TEND0          | POE8#                                         |                                                                            | MCLK2                               |           |         |
| W6         |                                   | PP2      |                | MTIOC0C / TCLKH                               |                                                                            | MCLK1                               |           |         |
| W7         |                                   | PP4      |                | MTIOC0A                                       |                                                                            | MCLK0                               |           |         |
| W8         | TRACECTL                          | PP6      |                | TIOCA11                                       | RXD1                                                                       | ENCIF06                             |           |         |
| W9         | TRACECLK                          | PP7      | DACK1          | TCLKF / TCLKH                                 | SCK1                                                                       |                                     |           |         |
| W10        | TRACEDATA1                        | PR1      | TEND1          | POE4#                                         | CTS1#                                                                      |                                     | IRQ9      |         |
| W11        | TRACEDATA3                        | PR3      |                | TIOCA10 / TIOCB10                             |                                                                            | ENCIF01                             |           |         |
| W12        | TRACEDATA5                        | PR5      |                | TIOCA8 / TIOCB8                               |                                                                            | ENCIF03                             |           |         |
| W13        |                                   | P24      | RD/WR#         |                                               | RXD0                                                                       |                                     | IRQ12     |         |
| W14        |                                   | P22      | RD#            | MTIOC7B / TIOCD0                              | SCK0                                                                       |                                     | IRQ2      |         |
| W15        |                                   | P44      | WAIT#          | TCLKD                                         | CTS0#                                                                      |                                     | IRQ12     | ADTRG0  |
| W16        |                                   | P43      | WE2#/<br>DQMUL | MTIOC8B                                       | USB_VBUSEN                                                                 |                                     |           |         |
| W17        |                                   | PS1      |                | MTIOC7B                                       |                                                                            | SSISCK0                             | IRQ1      |         |
| W18        |                                   | PS3      |                | MTIOC7A                                       |                                                                            | SSIRXD0                             |           |         |
| W19        |                                   | PS4      |                | MTIOC6D                                       |                                                                            | SSITXD0                             |           |         |
| W20        |                                   | PS5      |                | MTIOC6B                                       |                                                                            |                                     |           |         |
| Y1         | VSS                               |          |                |                                               |                                                                            |                                     |           |         |
| Y2         |                                   | P67      | TEND0          | GTIOC3B                                       | CTXD0 /<br>USB_OVRCUR                                                      |                                     | IRQ15     |         |
| Y3         |                                   | P66      | DACK0          | GTIOC3A                                       | CTXD1 /<br>USB_VBUSEN                                                      |                                     | IRQ14     |         |
| Y4         |                                   | PN7      | DREQ0          | MTIOC3A / TIOCD6                              |                                                                            | MDAT3                               |           |         |
| Y5         |                                   | PP1      | DACK0          | MTIOC0D                                       |                                                                            | MDAT2                               |           |         |
| Y6         |                                   | PP3      |                | MTIOC0B / TCLKC                               |                                                                            | MDAT1                               |           |         |
| Y7         |                                   | PP5      |                | PO22                                          |                                                                            | MDAT0                               |           |         |
| Y8         | VSS                               |          |                |                                               |                                                                            |                                     |           |         |
| Y9         | TRACEDATA0                        | PR0      | DREQ1          | TCLKE / TCLKG                                 | TXD1                                                                       | ENCIF07                             |           |         |
| Y10        | TRACEDATA2                        | PR2      |                | TIOCA11 / TIOCB11                             | RTS1#                                                                      | ENCIF00                             |           |         |
| Y11        | TRACEDATA4                        | PR4      |                | TIOCA9 / TIOCB9                               |                                                                            | ENCIF02                             |           |         |
| Y12        | TRACEDATA6                        | PR6      |                | TIOCA7 / TIOCB7                               |                                                                            | ENCIF04                             |           |         |

**Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (10 / 10)**

| Pin Number   |                                   |          |             | Timer                                | Communication                                              | Others                                      |
|--------------|-----------------------------------|----------|-------------|--------------------------------------|------------------------------------------------------------|---------------------------------------------|
| 320-Pin FBGA | Power Supply Clock System Control | I/O Port | Bus         | (MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | (ETHERC, ECATC*1, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | (SSI, DSMIF, Encoder I/F) Interrupt S12ADCa |
| Y13          | TRACEDATA7                        | PR7      |             | TIOCA6 / TIOCB6                      |                                                            | ENCIF05                                     |
| Y14          |                                   | P25      | A18 / TEND1 | MTCLKC                               |                                                            |                                             |
| Y15          |                                   | P41      | BS#         |                                      | SCK0                                                       |                                             |
| Y16          |                                   | P42      |             | MTIOC7C                              | RXD0                                                       |                                             |
| Y17          |                                   | P40      |             | MTIOC8A                              | TXD0                                                       |                                             |
| Y18          |                                   | PS0      |             | MTIOC7D                              |                                                            | AUDIO_CLK                                   |
| Y19          | TRACECLK                          | P10      | CKIO        | TIOCA0                               |                                                            | IRQ0                                        |
| Y20          | VSS                               |          |             |                                      |                                                            |                                             |

Note 1. Optional

**Table 1.8 List of Pin and Pin Functions (176-Pin HLQFP) (1 / 6)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF) Interrupt S12ADCa |
|------------|-----------------------------------|----------|-----|-----------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| 1          |                                   | PC3      |     |                                               | ETH0_RXC /<br>ETH0_RXDV /<br>RXD4 / SCL0 /<br>CRXD1                |                                          |
| 2          | VCCQ33                            |          |     |                                               |                                                                    |                                          |
| 3          | VSS                               |          |     |                                               |                                                                    |                                          |
| 4          | VDD                               |          |     |                                               |                                                                    |                                          |
| 5          |                                   | P82      |     | TIOCD3                                        | ETH0_TXEN /<br>ETH1_CRS /<br>SCK4 / RTS3# /<br>USB_OVRCUR          |                                          |
| 6          |                                   | P85      |     |                                               | CLKOUT25M0 /<br>TXD4 / SCK4 /<br>USB_VBUSEN                        | IRQ5                                     |
| 7          | ERROROUT #                        |          |     |                                               |                                                                    |                                          |
| 8          |                                   | P35      |     |                                               |                                                                    | NMI                                      |
| 9          | TRST#                             |          |     |                                               |                                                                    |                                          |
| 10         | TDO                               | P33      |     |                                               |                                                                    |                                          |
| 11         | TDI                               | P34      |     |                                               |                                                                    |                                          |
| 12         | TMS                               |          |     |                                               |                                                                    |                                          |
| 13         | TCK                               |          |     |                                               |                                                                    |                                          |
| 14         | BSCANP                            |          |     |                                               |                                                                    |                                          |
| 15         | VDD                               |          |     |                                               |                                                                    |                                          |
| 16         | VSS                               |          |     |                                               |                                                                    |                                          |
| 17         | MD2                               |          |     |                                               |                                                                    |                                          |
| 18         | MD1                               |          |     |                                               |                                                                    |                                          |
| 19         | PLLVD1                            |          |     |                                               |                                                                    |                                          |
| 20         | PLLVS1                            |          |     |                                               |                                                                    |                                          |
| 21         | OSC1H                             |          |     |                                               |                                                                    |                                          |
| 22         | VCCQ33                            |          |     |                                               |                                                                    |                                          |
| 23         | EXTAL                             |          |     |                                               |                                                                    |                                          |
| 24         | XTAL                              |          |     |                                               |                                                                    |                                          |
| 25         | VSS                               |          |     |                                               |                                                                    |                                          |
| 26         | MD0                               |          |     |                                               |                                                                    |                                          |
| 27         | PLLVD0                            |          |     |                                               |                                                                    |                                          |
| 28         | PLLVS0                            |          |     |                                               |                                                                    |                                          |
| 29         | RES#                              |          |     |                                               |                                                                    |                                          |
| 30         | RSTOUT#                           |          |     |                                               |                                                                    |                                          |
| 31         | VDD                               |          |     |                                               |                                                                    |                                          |
| 32         | VSS                               |          |     |                                               |                                                                    |                                          |
| 33         | VDD33_USB                         |          |     |                                               |                                                                    |                                          |
| 34         | VSS_USB                           |          |     |                                               |                                                                    |                                          |
| 35         | USB_RREF                          |          |     |                                               |                                                                    |                                          |

**Table 1.8 List of Pin and Pin Functions (176-Pin HLQFP) (2 / 6)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus        | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF) Interrupt S12ADCa |
|------------|-----------------------------------|----------|------------|-----------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| 36         | USB_DM                            |          |            |                                               |                                                                    |                                          |
| 37         | USB_DP                            |          |            |                                               |                                                                    |                                          |
| 38         | VDD33_USB                         |          |            |                                               |                                                                    |                                          |
| 39         | DVDD_USB                          |          |            |                                               |                                                                    |                                          |
| 40         |                                   | P30      |            |                                               | CRXD0 / USB_VBUSIN                                                 |                                          |
| 41         |                                   | P60      | TEND0      |                                               | CTXD0 / SPBSSL                                                     |                                          |
| 42         |                                   | P61      | DACK0      |                                               | CTXD1 / SPBIO3                                                     |                                          |
| 43         | VCCQ33                            |          |            |                                               |                                                                    |                                          |
| 44         |                                   | P62      |            |                                               | SPBCLK                                                             |                                          |
| 45         | VSS                               |          |            |                                               |                                                                    |                                          |
| 46         |                                   | P63      |            |                                               | SPBMO/SPBIO0                                                       |                                          |
| 47         |                                   | P64      |            |                                               | SPBMO/SPBIO1                                                       |                                          |
| 48         |                                   | P65      | DREQ0      |                                               | SPBIO2                                                             |                                          |
| 49         | VSS                               |          |            |                                               |                                                                    |                                          |
| 50         | VDD                               |          |            |                                               |                                                                    |                                          |
| 51         |                                   | P36      | WE0#/DQMLL | PO0                                           |                                                                    |                                          |
| 52         |                                   | P37      | WE1#/DQMLU | PO1                                           |                                                                    |                                          |
| 53         |                                   | PG0      | A1         | PO2                                           |                                                                    |                                          |
| 54         |                                   | PG1      | A2         | PO3                                           |                                                                    |                                          |
| 55         | VCCQ33                            |          |            |                                               |                                                                    |                                          |
| 56         |                                   | PG2      | A3         | PO4 / TOC0                                    | RSPCK1                                                             |                                          |
| 57         |                                   | PG3      | A4         | PO5 / TIC1                                    | MISO1                                                              |                                          |
| 58         |                                   | PG4      | A5         | PO6 / TOC1                                    | MOSI1                                                              |                                          |
| 59         |                                   | PG5      | A6         | TCLKA / PO7                                   | SSL10                                                              |                                          |
| 60         |                                   | PG6      | A7         | TCLKB / PO8                                   | SSL11                                                              |                                          |
| 61         |                                   | PG7      | A8         | PO9                                           |                                                                    |                                          |
| 62         |                                   | PH0      | A9         | PO10                                          |                                                                    |                                          |
| 63         |                                   | PH1      | A10        | MTIOC2B / PO11                                |                                                                    |                                          |
| 64         |                                   | PH2      | A11        | MTIOC2A / PO12                                |                                                                    |                                          |
| 65         |                                   | PH3      | A12        | MTIOC1B / PO13                                |                                                                    |                                          |
| 66         | VDD                               |          |            |                                               |                                                                    |                                          |
| 67         | VSS                               |          |            |                                               |                                                                    |                                          |
| 68         |                                   | PH4      | A13        | PO14                                          |                                                                    | IRQ4                                     |
| 69         |                                   | PH5      | A14        | PO15                                          |                                                                    |                                          |
| 70         |                                   | PH6      | A15        | MTIOC7D                                       | RTS0#                                                              |                                          |
| 71         |                                   | PH7      | A16        | MTIC5W                                        |                                                                    |                                          |
| 72         |                                   | P24      | RD/WR#     |                                               | RXD0                                                               | IRQ12                                    |
| 73         |                                   | P21      | CS0#       | MTIC5V / TIOCBI                               | CTS0#                                                              | IRQ1                                     |
| 74         |                                   | P22      | RD#        | MTIOC7B / TIOCDO                              | SCK0                                                               | IRQ2                                     |

**Table 1.8 List of Pin and Pin Functions (176-Pin HLQFP) (3 / 6)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus                | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF) Interrupt S12ADCa |
|------------|-----------------------------------|----------|--------------------|-----------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| 75         |                                   | P23      | A0 / DACK1         | MTIC5U                                        | TXD0                                                               |                                          |
| 76         |                                   | P20      | A17                | MTCLKD                                        |                                                                    |                                          |
| 77         |                                   | P25      | A18 / TEND1        | MTCLKC                                        |                                                                    |                                          |
| 78         |                                   | P26      | A19 / DREQ1        | MTIOC8D                                       |                                                                    |                                          |
| 79         |                                   | P27      | A20                | MTIOC8C / TIOCB0                              | RTS0#                                                              |                                          |
| 80         | VDD                               |          |                    |                                               |                                                                    |                                          |
| 81         | VSS                               |          |                    |                                               |                                                                    |                                          |
| 82         |                                   | P42      |                    | MTIOC7C                                       | RXD0                                                               |                                          |
| 83         |                                   | P40      |                    | MTIOC8A                                       | TXD0                                                               |                                          |
| 84         |                                   | P43      | WE2#/<br>DQMUL     | MTIOC8B                                       | USB_VBUSEN                                                         |                                          |
| 85         |                                   | P47      | WE3#/<br>DQMUU/AH# | MTIOC6C                                       |                                                                    |                                          |
| 86         | VCCQ33                            |          |                    |                                               |                                                                    |                                          |
| 87         | TRACECLK                          | P10      | CKIO               | TIOCA0                                        |                                                                    | IRQ0                                     |
| 88         | VSS                               |          |                    |                                               |                                                                    |                                          |
| 89         | TRACECTL                          | P00      | D0                 | MTIOC6A / TIOCA1                              |                                                                    |                                          |
| 90         |                                   | P01      | D1                 | MTIC5W / TIOCA2                               |                                                                    |                                          |
| 91         |                                   | P02      | D2                 | MTIC5V / TIOCA3                               |                                                                    |                                          |
| 92         | VCCQ33                            |          |                    |                                               |                                                                    |                                          |
| 93         |                                   | P03      | D3                 | MTIC5U / TIOCA4                               |                                                                    |                                          |
| 94         |                                   | P04      | D4                 | MTIOC3C / TIOCA5                              |                                                                    |                                          |
| 95         |                                   | P05      | D5                 | MTIOC3A                                       |                                                                    |                                          |
| 96         |                                   | P06      | D6                 | MTIOC2B / TIOCB0                              |                                                                    |                                          |
| 97         |                                   | P07      | D7                 | MTIOC2A / TIOCB1                              |                                                                    |                                          |
| 98         | TRACEDATA 0                       | PE0      | D8                 | MTIOC1B / TIOCB2                              |                                                                    |                                          |
| 99         | TRACEDATA 1                       | PE1      | D9                 | MTCLKD / TIOCB3                               | SSL03                                                              |                                          |
| 100        | VSS                               |          |                    |                                               |                                                                    |                                          |
| 101        | TRACEDATA 2                       | PE2      | D10                | MTCLKC / TIOCB4                               | SSL02                                                              | IRQ2                                     |
| 102        | TRACEDATA 3                       | PE3      | D11                | MTIOC0D / TIOCB5                              | CTS1# / SSL01                                                      | IRQ3                                     |
| 103        | TRACEDATA 4                       | PE4      | D12                | MTIOC0B / TIOCC0                              | RTS1# / SSL00                                                      |                                          |
| 104        | TRACEDATA 5                       | PE5      | D13                | MTIOC0C / TIOCC3                              | TXD1 / MOSI0                                                       |                                          |
| 105        | TRACEDATA 6                       | PE6      | D14                | MTIOC0A / TIOCD0                              | RXD1 / MISO0                                                       | IRQ6                                     |

**Table 1.8 List of Pin and Pin Functions (176-Pin HLQFP) (4 / 6)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus         | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF) Interrupt S12ADCa |
|------------|-----------------------------------|----------|-------------|-----------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| 106        | TRACEDATA 7                       | PE7      | D15         | MTIOC7A / TIOCD3 / POE8#                      | SCK1 / RSPCK0                                                      |                                          |
| 107        | VSS                               |          |             |                                               |                                                                    |                                          |
| 108        | VDD                               |          |             |                                               |                                                                    |                                          |
| 109        | TRACECLK                          | P70      | D16         | MTIOC6D                                       | RTS1# / USB_OVRCUR                                                 | IRQ0                                     |
| 110        | TRACECTL                          | P71      | D17         | POE0# / POE10# / TOC2                         | SCK1                                                               |                                          |
| 111        | TRACEDATA 0                       | P72      | D18         | MTIOC1A / TIC2                                | TXD1                                                               | SSITXD0                                  |
| 112        | TRACEDATA 1                       | P73      | D19         | MTCLKB                                        | RXD1                                                               | SSIRXD0 IRQ3                             |
| 113        | TRACEDATA 2                       | P74      | D20         | MTCLKA                                        | CTS1# / SSL03                                                      | SSISCK0                                  |
| 114        | TRACEDATA 3                       | P75      | D21         | MTIOC4D / GTIOC2B                             | SSL00                                                              | IRQ13                                    |
| 115        | TRACEDATA 4                       | P76      | D22         | MTIOC4B / GTIOC2A                             | SSL01                                                              | SSIWS0                                   |
| 116        | TRACEDATA 5                       | P77      | D23         | MTIOC4C / GTIOC1B                             | RSPCK0                                                             |                                          |
| 117        | TRACEDATA 6                       | PA0      | D24         | MTIOC4A / GTIOC1A                             | MOSI0                                                              | MDAT3                                    |
| 118        | TRACEDATA 7                       | PA1      | D25         | MTIOC3D / GTIOC0B                             | MISO0                                                              | AUDIO_CLK / MCLK3                        |
| 119        | VSS                               |          |             |                                               |                                                                    |                                          |
| 120        | VDD                               |          |             |                                               |                                                                    |                                          |
| 121        |                                   | PA2      | D26 / DREQ2 | MTIOC3B / GTIOC0A                             | SSL02                                                              | MDAT2                                    |
| 122        |                                   | PA3      | D27 / DACK2 | GTETRG / TIOCA2                               | ETHSWSECOUT / SCK2                                                 | MCLK2                                    |
| 123        |                                   | PA4      | D28 / TEND2 | TIOCA3                                        | ETH1_INT / RXD2                                                    | MDAT1 ADTRG0                             |
| 124        |                                   | PA5      | D29         | TIOCA4                                        | ETH0_INT / ETH1_TXER / TXD2                                        | MCLK1                                    |
| 125        |                                   | PA6      | D30 / A21   | GTIOC3A                                       | CTS2#                                                              | MDAT0 IRQ6                               |
| 126        | VCCQ33                            |          |             |                                               |                                                                    |                                          |
| 127        |                                   | PA7      | D31 / A22   | MTIOC6B / GTIOC3B                             | RTS2#                                                              | MCLK0 IRQ7                               |
| 128        | VDD                               |          |             |                                               |                                                                    |                                          |
| 129        | VSS                               |          |             |                                               |                                                                    |                                          |
| 130        |                                   | P13      | RAS#        | MTIOC4C / GTIOC1B                             |                                                                    |                                          |
| 131        |                                   | P14      | CAS#        | MTIOC4A / GTIOC1A                             |                                                                    |                                          |
| 132        |                                   | P15      | CS3# / CKE  | MTIOC3D / GTIOC0B                             |                                                                    |                                          |
| 133        |                                   | P16      | CS4# / CS2# | MTIOC3B / GTIOC0A                             |                                                                    |                                          |

**Table 1.8 List of Pin and Pin Functions (176-Pin HLQFP) (5 / 6)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus   | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF) Interrupt S12ADCa |
|------------|-----------------------------------|----------|-------|-----------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| 134        |                                   | P17      | CS5#  |                                               | ETH1_TXER / PHYRESETOUT#                                           | ADTRG0                                   |
| 135        | VCCQ33                            |          |       |                                               |                                                                    |                                          |
| 136        | VREFH0                            |          |       |                                               |                                                                    |                                          |
| 137        | VREFL0                            |          |       |                                               |                                                                    |                                          |
| 138        | AVSS0                             |          |       |                                               |                                                                    |                                          |
| 139        | AVCC0                             |          |       |                                               |                                                                    |                                          |
| 140        |                                   |          |       |                                               |                                                                    | AN000                                    |
| 141        |                                   |          |       |                                               |                                                                    | AN001                                    |
| 142        |                                   |          |       |                                               |                                                                    | AN002                                    |
| 143        |                                   |          |       |                                               |                                                                    | AN003                                    |
| 144        |                                   |          |       |                                               |                                                                    | AN004                                    |
| 145        |                                   |          |       |                                               |                                                                    | AN005                                    |
| 146        |                                   |          |       |                                               |                                                                    | AN006                                    |
| 147        |                                   |          |       |                                               |                                                                    | AN007                                    |
| 148        | VDD                               |          |       |                                               |                                                                    |                                          |
| 149        | VSS                               |          |       |                                               |                                                                    |                                          |
| 150        |                                   | P51      |       |                                               | PHYLINK1 / RSPCK2                                                  | IRQ1                                     |
| 151        |                                   | P54      |       |                                               | CLKOUT25M1 / MOSI2                                                 |                                          |
| 152        |                                   | P56      | BS#   |                                               | ETH1_TXER                                                          |                                          |
| 153        |                                   | PD5      | A21   | TIC0                                          | ETH1_TXD3 / ETH0_TXD0 / SSL20                                      | MCLK3                                    |
| 154        |                                   | PD6      | A22   | TIC1                                          | ETH1_TXD2 / ETH0_TXD1 / MISO2                                      | MCLK2                                    |
| 155        |                                   | PD7      |       | MTIOC4D / GTIOC2B / TOC0                      | ETH1_TXD1                                                          |                                          |
| 156        |                                   | P86      |       | MTIOC4B / GTIOC2A / TOC1                      | ETH1_TXD0 / RSPCK2                                                 |                                          |
| 157        |                                   | P87      | A23   | MTIOC4C / GTIOC1B                             | ETH1_TXC / ETH0_RXD0                                               | MCLK1                                    |
| 158        |                                   | PF5      |       | MTIOC4A / GTIOC1A / TIC2                      | ETH1_TXEN                                                          |                                          |
| 159        | VCCQ33                            |          |       |                                               |                                                                    |                                          |
| 160        | VDD                               |          |       |                                               |                                                                    |                                          |
| 161        | VSS                               |          |       |                                               |                                                                    |                                          |
| 162        |                                   | PF6      |       | MTIOC3D / GTIOC0B / TOC2                      | ETH1_RXD0                                                          |                                          |
| 163        |                                   | PB7      |       | MTIOC3B / GTIOC0A / TOC3                      | ETH1_RXD1                                                          |                                          |
| 164        |                                   | PC0      | WAIT# | GTETRG                                        | ETH1_RXD2 / SCL1                                                   | MDAT3                                    |

**Table 1.8 List of Pin and Pin Functions (176-Pin HLQFP) (6 / 6)**

| Pin Number | Power Supply Clock System Control | I/O Port | Bus  | Timer<br>(MTU3a, GPTa, TPUa, PPG, POE3, CMTW) | Communication<br>(ETHERC, SCIFA, RSPIa, RIICa, RSCAN, SPIBSC, USB) | Others<br>(SSI, DSMIF) Interrupt S12ADCa |
|------------|-----------------------------------|----------|------|-----------------------------------------------|--------------------------------------------------------------------|------------------------------------------|
| 165        |                                   | PC1      |      |                                               | ETH1_RXD3 / PHYLINK0 / SDA1                                        | MDAT2 IRQ9                               |
| 166        |                                   | PB0      |      | MTCLKB / TCLKD / TIC3                         | ETH1_RXDV                                                          |                                          |
| 167        |                                   | PB1      |      | MTCLKA / TCLKC                                | ETH1_RXER / CTS4#                                                  |                                          |
| 168        |                                   | PB2      |      | MTIOC1A                                       | ETH1_RXC / ETH0_RXD1 / SSL30                                       | MDAT1                                    |
| 169        | VCCQ33                            |          |      |                                               |                                                                    |                                          |
| 170        |                                   | PB3      | CS1# |                                               | ETH1_CRS / PHYRESETOUT# / TXD3 / CTXD1                             | MCLK0 IRQ3                               |
| 171        |                                   | PB4      | A24  |                                               | ETH1_COL / RXD3 / MOSI3                                            | MDAT0                                    |
| 172        |                                   | PB5      |      | TCLKB / POE0# / POE10#                        | ETH_MDIO / CTS3# / RSPCK3                                          |                                          |
| 173        | VSS                               |          |      |                                               |                                                                    |                                          |
| 174        | VDD                               |          |      |                                               |                                                                    |                                          |
| 175        |                                   | PB6      |      | TCLKA                                         | ETH_MDC / SCK3 / RTS4# / MISO3                                     |                                          |
| 176        |                                   | PC2      |      |                                               | ETH0_TXC / ETH1_RXD2 / SDA0                                        |                                          |

## 2. Electrical Characteristics

### 2.1 Absolute Maximum Ratings

**Table 2.1 Absolute Maximum Rating**

Conditions: VSS = PLLVSS0 = PLLVSS1 = AVSS0 = AVSS1 = VREFL0 = VREFL1 = VSS\_USB = 0 V

| Item                                                | Symbol            | Value                          | Unit |
|-----------------------------------------------------|-------------------|--------------------------------|------|
| Power supply voltage (I/O)                          | VCCQ33            | −0.3 to +4.2                   | V    |
| Power supply voltage (internal)                     | VDD               | −0.3 to +1.6                   | V    |
| PLL power supply voltage                            | PLLVD0, PLLVD1    | −0.3 to +1.6                   | V    |
| Input voltage (except for ports for 5-V tolerant*1) | V <sub>in1</sub>  | −0.3 to VCCQ33 + 0.3*5         | V    |
| Input voltage (ports for 5-V tolerant*1)            | V <sub>in2</sub>  | −0.3 to +5.5*3                 | V    |
| Analog power supply voltage                         | AVCC0, AVCC1*2    | −0.3 to +4.2                   | V    |
| Reference power supply voltage                      | VREFH0, VREFH1    | −0.3 to (AVCC0, AVCC1) + 0.3*5 | V    |
| USB digital power supply voltage                    | DVDD_USB          | −0.3 to +1.6                   | V    |
| USB power supply voltage                            | VDD33_USB*2       | −0.3 to +4.2                   | V    |
| Analog input voltage                                | V <sub>AN</sub>   | −0.3 to (AVCC0, AVCC1) + 0.3*5 | V    |
| Operating temperature (junction temperature)        | T <sub>j</sub> *4 | −40 to +125                    | °C   |
| Storage temperature                                 | T <sub>stg</sub>  | −55 to +125                    | °C   |

**[Usage Notes]**

- Do not directly connect output pins (I/O pins in output state) of IC products to other output pins (including I/O pins in output state), power pins, or GND pins. However, output pins are directly connectable in an external circuit where timing design is provided to avoid conflict of outputs of high-impedance pins such as I/O pins.
- If even a single item exceeds the absolute maximum rating for even a moment, it may degrade the product's quality. In other words, the absolute maximum rating is a rated value that potentially causes physical damage to products. Use products with a margin of the absolute maximum rating.  
Specified values and conditions shown in DC characteristics and AC characteristics are the range of normal operation and quality assurance of products.

Note 1. Ports PC0 to PC7 and P30 are 5-V tolerant.

Note 2. When the A/D converter unit 0 is not to be used, connect the AVCC0 and VREFH0 pins to VCCQ33 and the AVSS0 and VREFL0 pins to VSS, respectively. Do not leave these pins open. In the same way, when the A/D converter unit 1 is not to be used, connect the AVCC1 and VREFH1 pins to VCCQ33 and the AVSS1 and VREFL1 pins to VSS, respectively. Do not leave these pins open. When the USB is not to be used, connect the VDD33\_USB pin to VCCQ33, the VSS\_USB pin to VSS, and the DVDD\_USB pin to VDD, respectively. Do not leave these pins open.

Note 3. When VCCQ33 is less than 3.0 V, the rated value of ports for 5-V tolerant is 3.6 V.


Note 4. For operations at the temperatures over 110 °C (junction temperature), refer to the RZ/T1 Group Application Note: Precautions for High-Temperature Operations (R01AN3116).

Note 5. Do not exceed the absolute maximum rating, 4.2 V.

## 2.2 Power On/Off Sequence

Turn on and off each power supply voltage according to the procedure shown in the figure below.

When turning on the power, be sure to fix TRST# pins and RES# pins to the low level. Otherwise, initialization is not performed successfully.

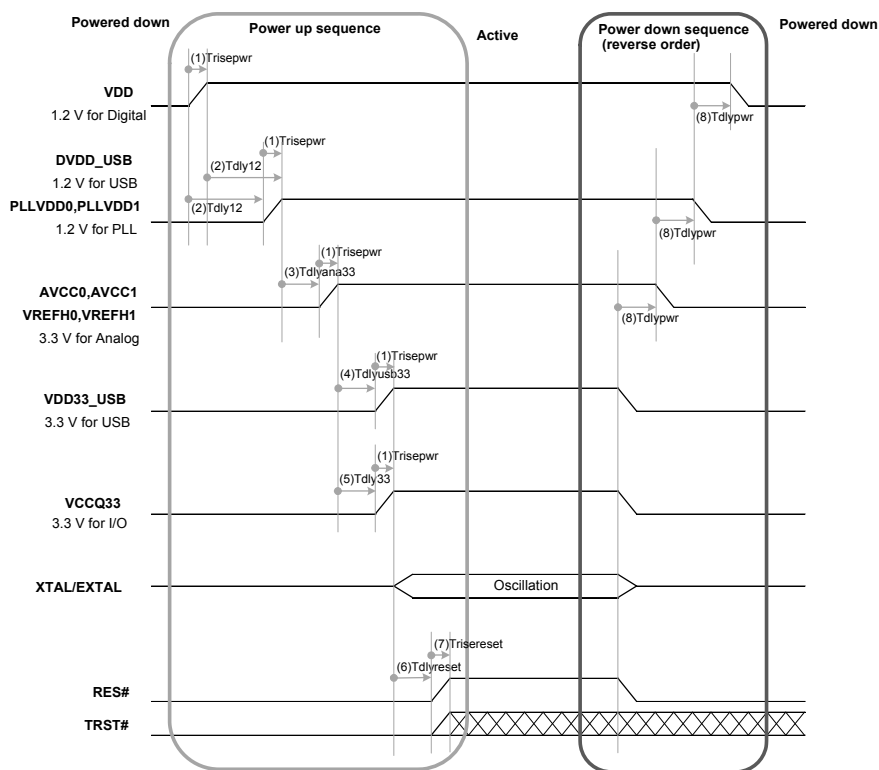

### Timing

| No. | Item       | Value  |     |        |
|-----|------------|--------|-----|--------|
|     |            | min    | typ | max    |
| (1) | Trisepwr   | 100 us | —   | 50 ms  |
| (2) | Tdly12     | 0 ms   | —   | 100 ms |
| (3) | Tdlyana33  | 0 ms   | —   | 100 ms |
| (4) | Tdlyusb33  | 0 ms   | —   | 100 ms |
| (5) | Tdly33     | 0 ms   | —   | 100 ms |
| (6) | Tdlyreset  | 10 ms  | —   | —      |
| (7) | Trisereset | —      | —   | 150 μs |
| (8) | Tdlypwr    | 0 ms   | —   | —      |

Note 1. Turn on all power supply voltages and reset signals with a monotonic increase and turn off with a monotonic decrease.

Note 2. Do not apply a negative voltage to power supply voltages.

Note 3. Before turning on the power, be sure to make reset pins (TRST# and RES#) active (low). Otherwise, inputs and outputs on the pins may be unstable. If this may also be a problem when turning off the power, make reset pins (TRST# and RES#) active (low.)

Note: If the power on/off sequence is not met (out of operation guarantee range), the pin input state and output state may be undefined.

Figure 2.1 Power On/Off Sequence

## 2.3 DC Characteristics

- Conditions: VDD = PLLVDD0 = PLLVDD1 = DVDD\_USB = 1.14 to 1.26 V,  
VCCQ33 = AVCC0 = AVCC1 = VREFH0 = VREFH1 = VDD33\_USB = 3.0 to 3.6 V  
VSS = PLLVSS0 = PLLVSS1 = AVSS0 = AVSS1 = VREFL0 = VREFL1 = VSS\_USB = 0 V,  
Tj = -40 to 125°C

Note: The 176-pin HLQFP does not have pins AVCC1, AVSS1, VREFH1, and VREFL1.

**Table 2.2 DC Characteristics (1)**

| Item                             | Symbol              | min  | typ | max  | Unit | Test Conditions |
|----------------------------------|---------------------|------|-----|------|------|-----------------|
| Power supply voltage (I/O)       | VCCQ33              | 3.0  | 3.3 | 3.6  | V    |                 |
| Power supply voltage (internal)  | VDD                 | 1.14 | 1.2 | 1.26 | V    |                 |
| PLL power supply voltage         | PLLVDD0,<br>PLLVDD1 | 1.14 | 1.2 | 1.26 | V    |                 |
| USB digital power supply voltage | DVDD_USB            | 1.14 | 1.2 | 1.26 | V    |                 |
| Analog power supply voltage      | AVCC0,<br>AVCC1     | 3.0  | 3.3 | 3.6  | V    |                 |
| USB power supply voltage         | VDD33_USB           | 3.0  | 3.3 | 3.6  | V    |                 |

**Table 2.3 DC Characteristics (2) [Power Supply]**

| Item             | Type                |        | Symbol  | typ      | max | Unit                              | Test Conditions                                       |
|------------------|---------------------|--------|---------|----------|-----|-----------------------------------|-------------------------------------------------------|
| Normal operation | VDD                 | 600MHz | Vlcc    | 330      | 820 | mA                                | Tj = -40 to 125 °C<br>(R7S910018CBG)                  |
|                  |                     |        |         | 273      | 752 | mA                                | Tj = -40 to 125 °C<br>(R7S910017CBG)                  |
|                  |                     |        |         | 265      | 740 | mA                                | Tj = -40 to 125 °C<br>(R7S910028CBG)                  |
|                  |                     |        |         | 258      | 731 | mA                                | Tj = -40 to 125 °C<br>(R7S910013CBG)                  |
|                  |                     |        |         | 209      | 673 | mA                                | Tj = -40 to 125 °C<br>(R7S910027CBG)                  |
|                  |                     |        |         | 201      | 663 | mA                                | Tj = -40 to 125 °C<br>(R7S910007CBG)                  |
|                  |                     | 450MHz |         | 310      | 798 | mA                                | Tj = -40 to 125 °C<br>(R7S910016CBG)                  |
|                  |                     |        |         | 253      | 730 | mA                                | Tj = -40 to 125 °C<br>(R7S910015CBG)                  |
|                  |                     |        |         | 245      | 718 | mA                                | Tj = -40 to 125 °C<br>(R7S910026CBG)                  |
|                  |                     |        |         | 238      | 709 | mA                                | Tj = -40 to 125 °C<br>(R7S910011CBG)                  |
|                  |                     |        |         | 189      | 651 | mA                                | Tj = -40 to 125 °C<br>(R7S910025CBG)                  |
|                  |                     |        |         | 181      | 641 | mA                                | Tj = -40 to 125 °C<br>(R7S910002CBG,<br>R7S910006CBG) |
|                  |                     | 300MHz |         | 180      | 640 | mA                                | Tj = -40 to 125 °C<br>(R7S910001CFP)                  |
|                  |                     |        |         | 225      | 696 | mA                                | Tj = -40 to 125 °C<br>(R7S910036CBG)                  |
|                  |                     |        |         | 169      | 629 | mA                                | Tj = -40 to 125 °C<br>(R7S910035CBG)                  |
|                  | PLL VDD0 + PLL VDD1 |        | PLLlcc  | 3.2      | 5   | mA                                |                                                       |
|                  | VCCQ33              |        | V33lcc  | 19*1, *2 | —   | mA                                |                                                       |
|                  | AVCC0               |        | AV0lcc  | 2        | 5   | mA                                | A/D conversion (unit 0)                               |
|                  | AVCC1               |        | AV1lcc  | 0.7      | 1.5 | mA                                | A/D conversion (unit 1)                               |
|                  | VREFH0              |        | VRF0lcc | 0.07     | 0.2 | mA                                | A/D conversion (unit 0)                               |
|                  | VREFH1              |        | VRF1lcc | 0.07     | 0.2 | mA                                | A/D conversion (unit 1)                               |
| DVDD_USB         |                     |        | 5.1     | 9        | mA  | USB high-speed communica-<br>tion |                                                       |
|                  |                     |        | 3.5     | 9        | mA  | USB full-speed communica-<br>tion |                                                       |
| VDD33_USB        |                     |        | 15*1    | —        | mA  | USB high-speed communica-<br>tion |                                                       |
|                  |                     |        | 10*1    | —        | mA  | USB full-speed communica-<br>tion |                                                       |

**Table 2.3 DC Characteristics (2) [Power Supply]**

| Item                                                     | Type            | Symbol  | typ        | max | Unit | Test Conditions   |
|----------------------------------------------------------|-----------------|---------|------------|-----|------|-------------------|
| Standby mode with all modules inactive (reference value) | VDD             | VIcc    | 41         | —   | mA   |                   |
|                                                          | PLLVD0 + PLLVD1 | PLLIcc  | 3.2        | —   | mA   |                   |
|                                                          | VCCQ33          | V33Icc  | 0.35*1, *2 | —   | mA   |                   |
|                                                          | AVCC0           | AV0Icc  | 0.64       | —   | μA   |                   |
|                                                          | AVCC1           | AV1Icc  | 0.32       | —   | μA   |                   |
|                                                          | VREFH0          | VRF0Icc | 0.24       | —   | μA   |                   |
|                                                          | VREFH1          | VRF1Icc | 0.24       | —   | μA   |                   |
|                                                          | DVDD_USB        | V12UIcc | 3.5        | —   | mA   | UTMI suspend mode |
|                                                          | VDD33_USB       | V33UIcc | 9.6*1      | —   | mA   | UTMI suspend mode |

Note 1. These values are reference values. The actual operating current greatly depends on the system (such as unsharpened waveforms due to I/O load and toggle frequency). Be sure to measure these current values in the system.

Note 2. V33Icc must be 80 mA or less. ( $\Sigma I_{OH}$  in Table 2.9)

**Table 2.4 DC Characteristics (3) [Except for USB2.0 Host/Function-Related Pins]**

| Item                                                                |                                                             | Symbol          | min                     | typ | max                    | Unit          | Test Conditions                                                                  |
|---------------------------------------------------------------------|-------------------------------------------------------------|-----------------|-------------------------|-----|------------------------|---------------|----------------------------------------------------------------------------------|
| Schmitt trigger<br>Input voltage                                    | Other than 5-V tolerant pins                                | $V_{IH1}$       | 2.4                     | —   | $V_{CCQ33} + 0.3$      | V             |                                                                                  |
|                                                                     |                                                             | $V_{IL1}$       | −0.3                    | —   | 0.8                    | V             |                                                                                  |
|                                                                     |                                                             | $\Delta V_{T1}$ | $V_{CCQ33} \times 0.05$ | —   | —                      | V             |                                                                                  |
|                                                                     | 5-V tolerant pins*1                                         | $V_{IH2}$       | $V_{CCQ33} \times 0.7$  | —   | $5.3^{*2}$             | V             |                                                                                  |
|                                                                     |                                                             | $V_{IL2}$       | −0.3                    | —   | $V_{CCQ33} \times 0.3$ | V             |                                                                                  |
|                                                                     |                                                             | $\Delta V_{T2}$ | $V_{CCQ33} \times 0.05$ | —   | —                      | V             |                                                                                  |
| Input high level voltage<br>(except for schmitt trigger input pins) |                                                             | $V_{IH3}$       | 2.4                     | —   | $V_{CCQ33} + 0.3$      | V             |                                                                                  |
| Input low level voltage<br>(except for schmitt trigger input pins)  |                                                             | $V_{IL3}$       | −0.3                    | —   | 0.8                    | V             |                                                                                  |
| Output high level<br>voltage                                        | All output pins                                             | $V_{OH}$        | $V_{CCQ33} - 0.5$       | —   | —                      | V             | $I_{OH} = -2 \text{ mA}$                                                         |
| Output low level<br>voltage                                         | Other than 5-V tolerant pins                                | $V_{OL1}$       | —                       | —   | 0.4                    | V             | $I_{OL1} = 2 \text{ mA}$                                                         |
|                                                                     | 5-V tolerant pins*1                                         | $V_{OL2}$       | —                       | —   | 0.4                    | V             | $I_{OL2} = 3 \text{ mA}$                                                         |
|                                                                     |                                                             |                 | —                       | —   | 0.6                    | V             | $I_{OL2} = 6 \text{ mA}$                                                         |
| Input leakage current                                               |                                                             | $ I_{in} $      | —                       | —   | 1.0                    | $\mu\text{A}$ | $V_{in1} = V_{in2} = 0 \text{ V}$<br>$V_{in1} = V_{in2} = V_{CCQ33}$             |
| Three-state<br>leakage current<br>(off state)                       | Input/output and output pins<br>excluding 5-V tolerant pins | $ I_{TSI} $     | —                       | —   | 1.0                    | $\mu\text{A}$ | $V_{in1} = 0 \text{ V}$<br>$V_{in1} = V_{CCQ33}$                                 |
|                                                                     | 5-V tolerant pins                                           |                 | —                       | —   | 5.0                    | $\mu\text{A}$ | $V_{in2} = 0 \text{ V}$<br>$V_{in2} = V_{CCQ33}$                                 |
| Input pull-up<br>MOS current                                        | Ports P50 to P56, P86 to<br>P87, P90 to P97, PD0 to PD7     | $I_{pu1}$       | −300                    | —   | −30                    | $\mu\text{A}$ | $V_{CCQ33} = 3.0 \text{ to } 3.6 \text{ V}$<br>$V_{in1} = V_{in2} = 0 \text{ V}$ |
|                                                                     | Pins other than the above*3                                 | $I_{pu2}$       | −120                    | —   | −7                     | $\mu\text{A}$ | $V_{CCQ33} = 3.0 \text{ to } 3.6 \text{ V}$<br>$V_{in1} = V_{in2} = 0 \text{ V}$ |
| Input pull-down<br>MOS current                                      | Ports P50 to P56, P86 to<br>P87, P90 to P97, PD0 to PD7     | $I_{pd1}$       | 30                      | —   | 300                    | $\mu\text{A}$ | $V_{in1} = V_{in2} = V_{CCQ33}$                                                  |
|                                                                     | Pins other than the above*3                                 | $I_{pd2}$       | 7                       | —   | 120                    | $\mu\text{A}$ | $V_{in1} = V_{in2} = V_{CCQ33}$                                                  |
| Pin capacity                                                        | All input/output and input pins                             | $C_{in}$        | —                       | —   | 10                     | pF            |                                                                                  |

Note 1. Ports PC0 to PC7 and P30 are 5-V tolerant.

Note 2. When VCCQ33 is less than 3.00 V, do not apply voltage of 3.6 V or higher to 5-V tolerant pins.

Note 3. 5-V tolerant pins are not included.

**Table 2.5 DC Characteristics (4) [USB2.0 USB\_RREF Pin]**

| Item               | Symbol           | min      | typ | max | Unit | Test Conditions |
|--------------------|------------------|----------|-----|-----|------|-----------------|
| Reference resistor | R <sub>REF</sub> | 200Ω ±1% |     |     |      |                 |

**Table 2.6 DC Characteristics (5) [USB2.0 Host/Function-Related Pins (Items for Both Full Speed and High Speed)\*1]**

| Item                                                                           | Symbol          | min   | typ | max   | Unit | Test Conditions            |
|--------------------------------------------------------------------------------|-----------------|-------|-----|-------|------|----------------------------|
| DP pull-up resistor<br>(when the function controller<br>operation is selected) | R <sub>PU</sub> | 0.900 | —   | 1.575 | kΩ   | Idle                       |
|                                                                                |                 | 1.425 | —   | 3.090 | kΩ   | Transmission/<br>reception |
| DP/DM pull-down resistors<br>(when the host function is<br>selected)           | R <sub>PD</sub> | 14.25 | —   | 24.80 | kΩ   |                            |

Note 1. USB\_DP and USB\_DM pins

**Table 2.7 DC Characteristics (6) [USB2.0 Host/Function-Related Pins (Full Speed)\*1]**

| Item                               | Symbol             | min | typ | max | Unit | Measuring Condition         |
|------------------------------------|--------------------|-----|-----|-----|------|-----------------------------|
| Input high level voltage           | V <sub>FSIH</sub>  | 2.0 | —   | —   | V    |                             |
| Input low level voltage            | V <sub>FSIL</sub>  | —   | —   | 0.8 | V    |                             |
| Differential input sensitivity     | V <sub>FSDI</sub>  | 0.2 | —   | —   | V    | (USB_DP) – (USB_DM)         |
| Differential common mode<br>range  | V <sub>FSCM</sub>  | 0.8 | —   | 2.5 | V    |                             |
| Output high level voltage          | V <sub>FSOH</sub>  | 2.8 | —   | 3.6 | V    | I <sub>FSOH</sub> = –200 μA |
| Output low level voltage           | V <sub>FSOL</sub>  | 0.0 | —   | 0.3 | V    | I <sub>FSOL</sub> = 2 mA    |
| Output signal crossover<br>voltage | V <sub>FSCRS</sub> | 1.3 | —   | 2.0 | V    | CL = 50 pF<br>(full-speed)  |

Note 1. USB\_DP and USB\_DM pins

**Table 2.8 DC Characteristics (7) [USB2.0 Host/Function-Related Pins (High Speed)\*1]**

| Item                                                          | Symbol              | min   | typ | max  | Unit | Test Conditions |
|---------------------------------------------------------------|---------------------|-------|-----|------|------|-----------------|
| Squelch detection threshold<br>voltage (differential voltage) | V <sub>HSSQ</sub>   | 100   | —   | 150  | mV   |                 |
| Common mode voltage range                                     | V <sub>HSCM</sub>   | –50   | —   | 500  | mV   |                 |
| Idle state                                                    | V <sub>HDOI</sub>   | –10.0 | —   | 10.0 | mV   |                 |
| Output high level voltage                                     | V <sub>HSOH</sub>   | 360   | —   | 440  | mV   |                 |
| Output low level voltage                                      | V <sub>HSOL</sub>   | –10.0 | —   | 10.0 | mV   |                 |
| Chirp J output voltage<br>(differential)                      | V <sub>CHIRPJ</sub> | 700   | —   | 1100 | mV   |                 |
| Chirp K output voltage<br>(differential)                      | V <sub>CHIRPK</sub> | –900  | —   | –500 | mV   |                 |

Note 1. USB\_DP and USB\_DM pins

**Table 2.9 Permissible Output Currents**

| Item                                                       |                              | Symbol          | min | typ | max  | Unit |
|------------------------------------------------------------|------------------------------|-----------------|-----|-----|------|------|
| Permissible output low current<br>(average value per pin)  | Other than 5-V tolerant pins | $I_{OL1}$       | —   | —   | 2.0  | mA   |
|                                                            | 5-V tolerant pins            | $I_{OL2}$       | —   | —   | 3.0  | mA   |
| Permissible output low current<br>(maximum value per pin)  | Other than 5-V tolerant pins | $I_{OL1}$       | —   | —   | 4.0  | mA   |
|                                                            | 5-V tolerant pins            | $I_{OL2}$       | —   | —   | 6.0  | mA   |
| Permissible output low current (total)                     | Total of all output pins     | $\Sigma I_{OL}$ | —   | —   | 80   | mA   |
| Permissible output high current<br>(average value per pin) | All output pins              | $I_{OH}$        | —   | —   | −2.0 | mA   |
| Permissible output high current<br>(maximum value per pin) | All output pins              | $I_{OH}$        | —   | —   | −4.0 | mA   |
| Permissible output high current (total)                    | Total of all output pins     | $\Sigma I_{OH}$ | —   | —   | −80  | mA   |

[Usage Notes] All output current values shall be within the values in Table 2.9 to ensure the reliability of this LSI.

## 2.4 AC Characteristics

- Conditions: VDD = PLLVDD0 = PLLVDD1 = DVDD\_USB = 1.14 to 1.26 V,  
VCCQ33 = AVCC0 = AVCC1 = VREFH0 = VREFH1 = VDD33\_USB = 3.0 to 3.6 V  
VSS = PLLVSS0 = PLLVSS1 = AVSS0 = AVSS1 = VREFL0 = VREFL1 = VSS\_USB = 0 V,  
Tj = -40 to 125 °C

Note: The 176-pin HLQFP does not have pins AVCC1, AVSS1, VREFH1, and VREFL1.

**Table 2.10 Operating Frequency**

| Item                |                                                        |               | Symbol | min   | max   | Unit |
|---------------------|--------------------------------------------------------|---------------|--------|-------|-------|------|
| Operating frequency | CPU clock (CPUCLK)                                     | 320-pin FBGA  | f      | 150   | 600   | MHz  |
|                     |                                                        |               |        | 150   | 300*1 |      |
|                     |                                                        | 176-pin HLQFP |        | 150   | 450   |      |
|                     | System clock (ICLK)                                    |               |        | 150   |       |      |
|                     | Peripheral module clock (PCLKA)                        |               |        | 150   |       |      |
|                     | Peripheral module clock (PCLKB)                        |               |        | 75    |       |      |
|                     | Peripheral module clock (PCLKC)                        |               |        | 150   |       |      |
|                     | Peripheral module clock (PCLKD)                        |               |        | 75    |       |      |
|                     | Peripheral module clock (PCLKE)                        |               |        | 18.75 | 75    |      |
|                     | Peripheral module clock (PCLKF)                        |               |        | 7.5   | 60    |      |
|                     | Peripheral module clock (PCLKG)                        |               |        | 7.5   | 60    |      |
|                     | Peripheral module clock (PCLKH)                        |               |        | 60    |       |      |
|                     | High-speed serial clock (SERICKL)                      |               |        | 120   | 150   |      |
|                     | $\Delta\Sigma$ interface clock output (DSCLK0, DSCLK1) |               |        | 6.25  | 25    |      |
|                     | External bus clock output (CKIO)                       |               |        | 18.75 | 75    |      |
|                     | External clock output for Ethernet PHY (CLKOUT25M)     |               |        | 25    | 50    |      |

Note 1. For R7S910035, R7S910135, R7S910036, and R7S910136 only.


## 2.4.1 Clock Timing

**Table 2.11 CKIO Pin Output Timing**

Output load condition: C = 30 pF

| Item                                   | Symbol      | min                     | typ | max  | Unit | Test Conditions                                                                                      |
|----------------------------------------|-------------|-------------------------|-----|------|------|------------------------------------------------------------------------------------------------------|
| CKIO pin output cycle time             | $t_{CKcyc}$ | 13.3                    | —   | 53.4 | ns   | Figure 2.2                                                                                           |
| CKIO pin output high level pulse width | $t_{CKH}$   | $t_{CKcyc}/2 - t_{CKr}$ | —   | —    | ns   |                                                                                                      |
| CKIO pin output low level pulse width  | $t_{CKL}$   | $t_{CKcyc}/2 - t_{CKf}$ | —   | —    | ns   |                                                                                                      |
| CKIO pin output rising time 1          | $t_{CKr}$   | —                       | —   | 5    | ns   | CKIO: High drive output setting*1<br>$V_{OH} = V_{CCQ33} - 0.5\text{ V}$<br>$V_{OL1} = 0.4\text{ V}$ |
| CKIO pin output falling time 1         | $t_{CKf}$   | —                       | —   | 5    | ns   |                                                                                                      |
| CKIO pin output rising time 2          | $t_{CKr}$   | —                       | —   | 9    | ns   | CKIO: Normal output setting<br>$V_{OH} = V_{CCQ33} - 0.5\text{ V}$<br>$V_{OL1} = 0.4\text{ V}$       |
| CKIO pin output falling time 2         | $t_{CKf}$   | —                       | —   | 9    | ns   |                                                                                                      |
| CKIO pin output rising time 3          | $t_{CKr}$   | —                       | —   | 2.5  | ns   | CKIO: High drive output setting*1<br>$V_{OH} = 2.0\text{ V}$<br>$V_{OL1} = 0.8\text{ V}$             |
| CKIO pin output falling time 3         | $t_{CKf}$   | —                       | —   | 2.5  | ns   |                                                                                                      |
| CKIO pin output rising time 4          | $t_{CKr}$   | —                       | —   | 4.5  | ns   | CKIO: Normal output setting<br>$V_{OH} = 2.0\text{ V}$<br>$V_{OL1} = 0.8\text{ V}$                   |
| CKIO pin output falling time 4         | $t_{CKf}$   | —                       | —   | 4.5  | ns   |                                                                                                      |



Note 1. When connecting SDRAM, be sure to set the B0 bit in the drive capacity control register (DSCR) to 1 to be a high drive output.

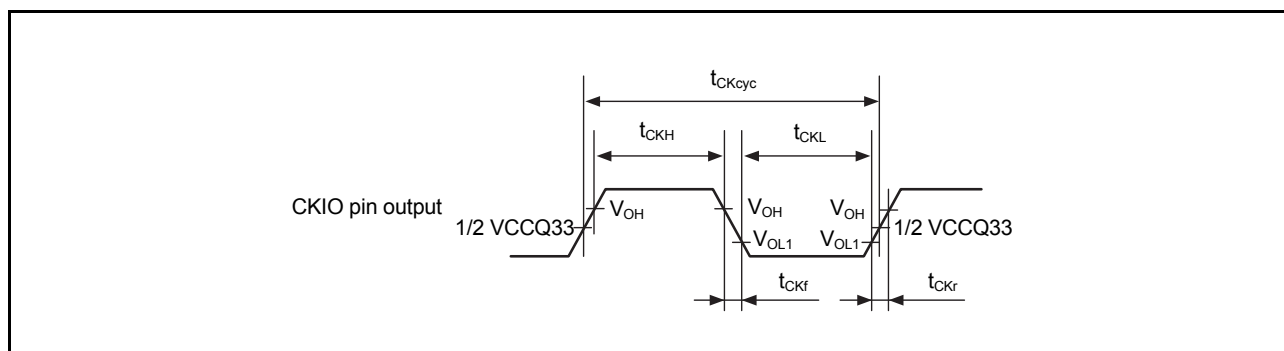**Figure 2.2 CKIO Pin Output Timing**

**Table 2.12 CLKOUT25Mn Timing**


Output load conditions:  $V_{OH} = 2.0\text{ V}$ ,  $V_{OL1} = 0.8\text{ Vn}$ ,  $C = 25\text{ pF}$  (RMII)  
 $V_{OH} = V_{CCQ33} - 0.5\text{ V}$ ,  $V_{OL1} = 0.4\text{ V}$ ,  $C = 30\text{ pF}$  (MII)

| Item              |                                      | Symbol          | min                   | max                   | Unit | Test Conditions |
|-------------------|--------------------------------------|-----------------|-----------------------|-----------------------|------|-----------------|
| CLKOUT25Mn (RMII) | CLKOUT25Mn cycle time                | $T_{ck}$        | 20                    | —                     | ns   | Figure 2.3      |
|                   | CLKOUT25Mn frequency Typ. 50 MHz     | —               | —                     | 50 + 50 ppm           | MHz  |                 |
|                   | CLKOUT25Mn duty                      | —               | 35                    | 65                    | %    |                 |
|                   | CLKOUT25Mn output low pulse width 1  | $T_{ckl1}$      | $T_{ck}/2 - T_{ckf1}$ | $T_{ck}/2 + T_{ckf1}$ | ns   |                 |
|                   | CLKOUT25Mn output high pulse width 1 | $T_{ckh1}$      | $T_{ck}/2 - T_{ckr1}$ | $T_{ck}/2 + T_{ckr1}$ | ns   |                 |
|                   | CLKOUT25Mn rising/falling time 1     | $T_{ckr1}/ckf1$ | 0.5                   | 4                     | ns   |                 |
| CLKOUT25Mn (MII)  | CLKOUT25Mn cycle time                | $T_{ck}$        | 40                    | —                     | ns   | Figure 2.4      |
|                   | CLKOUT25Mn frequency Typ. 25 MHz     | —               | —                     | 25 + 50 ppm           | MHz  |                 |
|                   | CLKOUT25Mn duty                      | —               | 35                    | 65                    | %    |                 |
|                   | CLKOUT25Mn output low pulse width 2  | $T_{ckl2}$      | $T_{ck}/2 - T_{ckf2}$ | $T_{ck}/2 + T_{ckf2}$ | ns   |                 |
|                   | CLKOUT25Mn output high pulse width 2 | $T_{ckh2}$      | $T_{ck}/2 - T_{ckr2}$ | $T_{ck}/2 + T_{ckr2}$ | ns   |                 |
|                   | CLKOUT25Mn rising/falling time 2     | $T_{ckr2}/ckf2$ | 0.5                   | 9                     | ns   |                 |

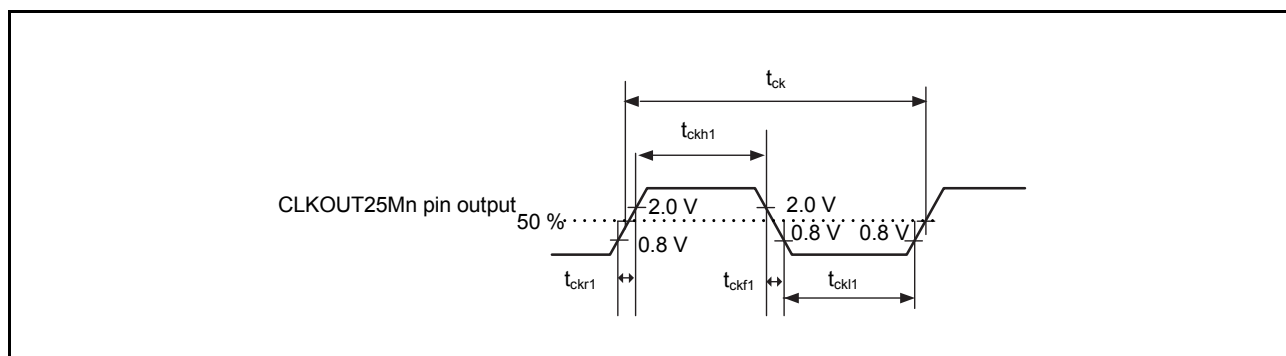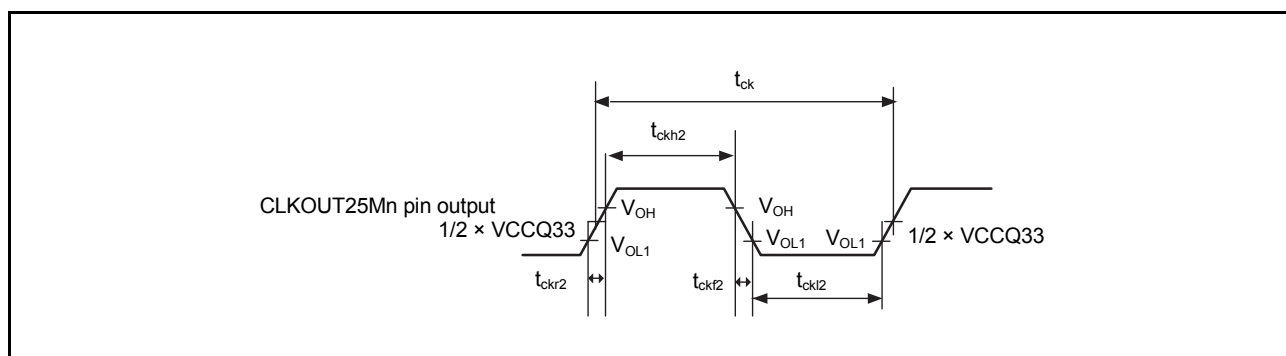**Figure 2.3 CLKOUT25Mn Pin Output Timing 1****Figure 2.4 CLKOUT25Mn Pin Output Timing 2****Table 2.13 EXTAL Clock Timing**

| Item                                  | Symbol      | min | typ             | max | Unit |
|---------------------------------------|-------------|-----|-----------------|-----|------|
| EXTAL external clock input cycle time | $t_{EXcyc}$ |     | 40.00 + 50 ppm  |     | ns   |
|                                       |             |     | 25.00 ± 25ppm*1 |     | MHz  |

Note 1. When EtherCAT is in use

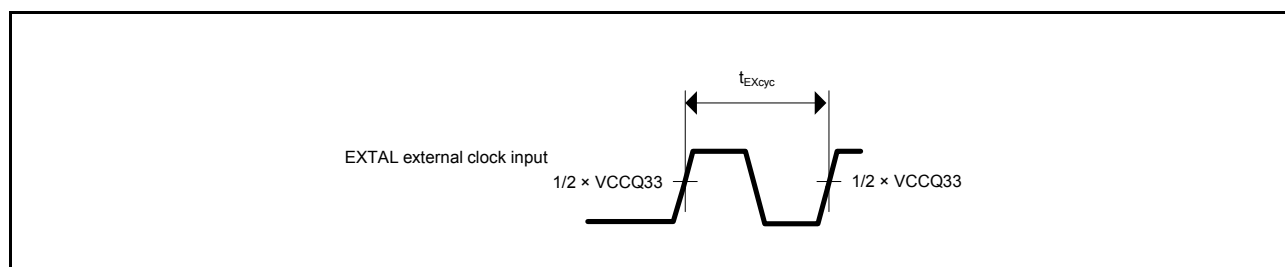


**Figure 2.5** EXTAL External Clock Input Timing

**Table 2.14** XTAL Clock Timing

| Item                                 | Symbol        | min | typ              | max | Unit |
|--------------------------------------|---------------|-----|------------------|-----|------|
| XTAL clock oscillator output cycle*1 | $t_{XTALcyc}$ |     | 40.00 + 50 ppm*2 |     | ns   |

Note 1. When using the XTAL clock, ask the oscillator manufacturer to evaluate oscillation of the oscillator. For the oscillation stabilization time, see the evaluation result provided by the oscillator manufacturer.


Note 2. When using the EtherCAT, make sure that the clock timing satisfies 25.00 MHz  $\pm$  25 ppm.

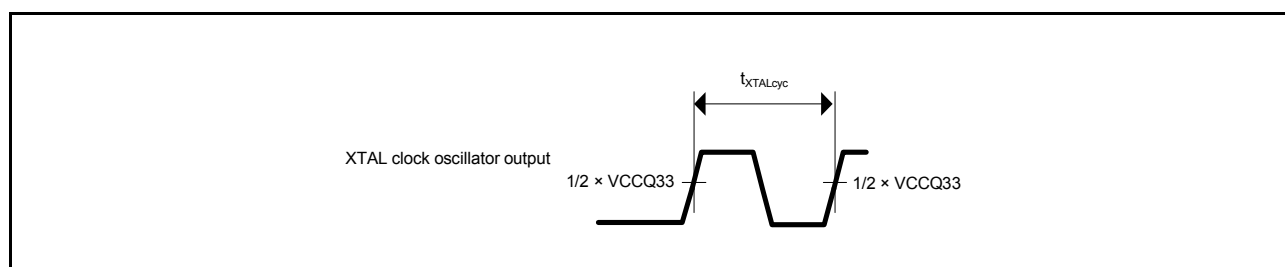

**Figure 2.6** XTAL Clock Oscillator Output Timing

**Table 2.15 LOCO Clock Timing**

| Item                                           | Symbol       | min  | typ  | max  | Unit    | Test Conditions |
|------------------------------------------------|--------------|------|------|------|---------|-----------------|
| LOCO clock cycle time                          | $t_{Lcyc}$   | 4.62 | 4.17 | 3.79 | $\mu s$ |                 |
| LOCO clock oscillation frequency               | $f_{LOCO}$   | 216  | 240  | 264  | kHz     |                 |
| LOCO clock oscillation stabilization wait time | $t_{LOCOWT}$ | —    | —    | 40   | $\mu s$ | Figure 2.7      |

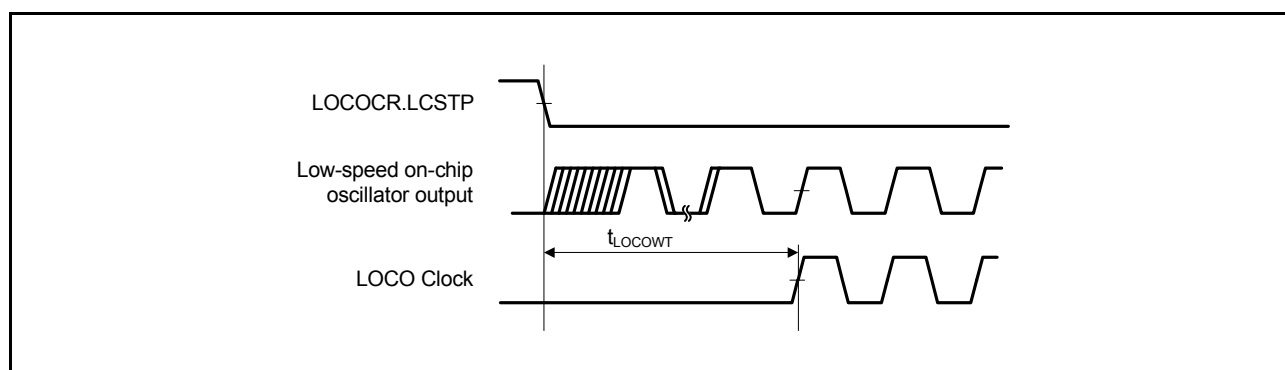
**Figure 2.7 LOCO Clock Oscillation Start Timing**

## 2.4.2 Reset Timing and Interrupt Timing


**Table 2.16** Reset Timing and Interrupt Timing

| Item                |                  | Symbol          | Min*1               | typ | max | Unit    | Test Conditions |
|---------------------|------------------|-----------------|---------------------|-----|-----|---------|-----------------|
| RES# pulse width    | At power on      | $T_{dlyreset}$  | 10                  | —   | —   | ms      | Figure 2.8      |
|                     | Other than above | $T_{dlyreset2}$ | 1                   | —   | —   | ms      |                 |
| RES# rising time    |                  | $T_{risereset}$ | —                   | —   | 150 | $\mu$ s |                 |
| TRST# pulse width   | At power on      | $T_{dlyreset}$  | 10                  | —   | —   | ms      |                 |
|                     | Other than above | $T_{dlyreset2}$ | 1                   | —   | —   | ms      |                 |
| TRST# rising time   |                  | $T_{risereset}$ | —                   | —   | 150 | $\mu$ s |                 |
| NMI pulse width     |                  | $t_{NMIW}$      | $t_{lcyc} \times 2$ | —   | —   | ns      | Figure 2.9      |
| IRQ pulse width     |                  | $t_{IRQW}$      | $t_{lcyc} \times 2$ | —   | —   | ns      | Figure 2.10     |
| ETH_INT pulse width |                  | $t_{EINTW}$     | $t_{lcyc} \times 2$ | —   | —   | ns      | Figure 2.11     |


Note 1.  $t_{lcyc}$ : ICLK cycle

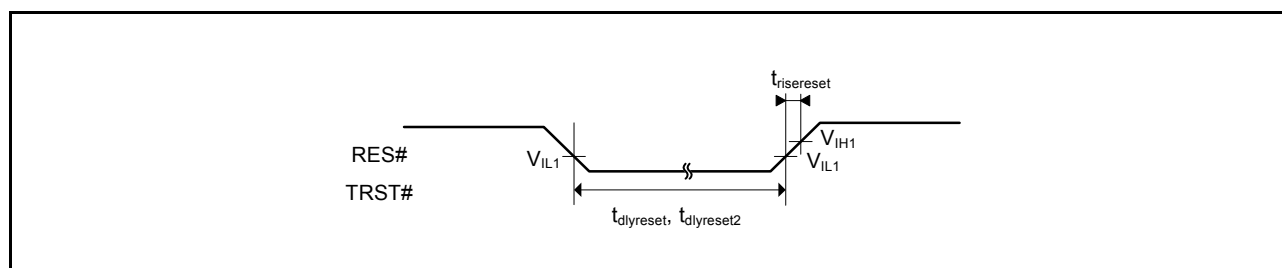


**Figure 2.8** Reset Input Timing

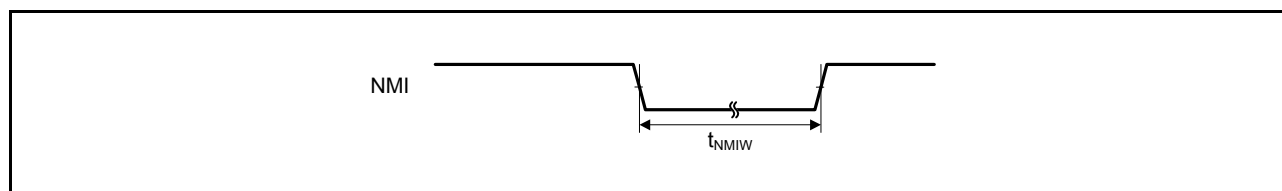

**Figure 2.9** NMI Interrupt Input Timing

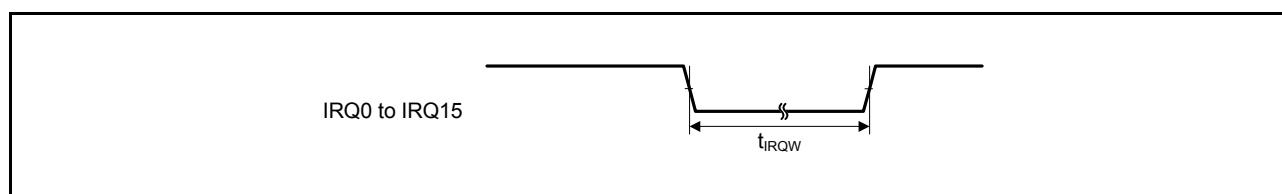

**Figure 2.10** IRQ Interrupt Input Timing

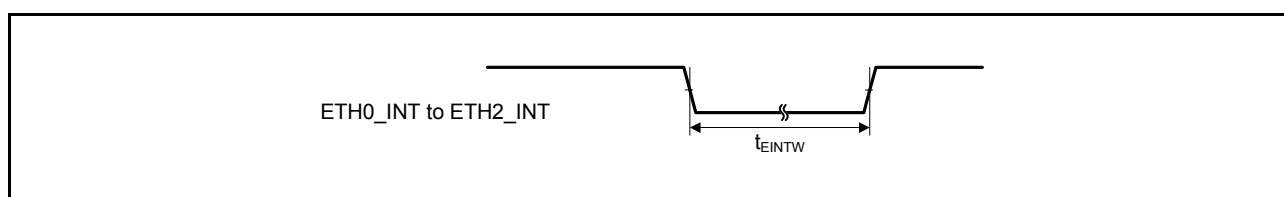

**Figure 2.11** ETH\_INT Interrupt Input Timing

## 2.4.3 Bus Timing

**Table 2.17 Bus Timing (1 / 2)**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30 \text{ pF}$ 

| Item                      | Symbol     | CKIO = 75 MHz*1         |                   | Unit | Reference Figure                                          |
|---------------------------|------------|-------------------------|-------------------|------|-----------------------------------------------------------|
|                           |            | Min.                    | Max.              |      |                                                           |
| Address delay time 1      | $t_{AD1}$  | $0/2^{*3}$              | 10                | ns   | Figure 2.12 to Figure 2.36                                |
| Address delay time 2      | $t_{AD2}$  | $1/2t_{cyc}$            | $1/2t_{cyc} + 10$ | ns   | Figure 2.19                                               |
| Address setup time        | $t_{AS}$   | 0                       | —                 | ns   | Figure 2.12 to Figure 2.15,<br>Figure 2.19                |
| Chip enable setup time    | $t_{cs}$   | 0                       | —                 | ns   | Figure 2.12 to Figure 2.15,<br>Figure 2.19                |
| Address hold time         | $t_{AH}$   | 0                       | —                 | ns   | Figure 2.12 to Figure 2.15                                |
| BS# delay time            | $t_{BSD}$  | —                       | 10                | ns   | Figure 2.12 to Figure 2.33                                |
| CS# delay time 1          | $t_{CSD1}$ | $0/2^{*3}$              | 10                | ns   | Figure 2.12 to Figure 2.36                                |
| Read/write delay time 1   | $t_{RWD1}$ | $0/2^{*3}$              | 10                | ns   | Figure 2.12 to Figure 2.36                                |
| Read strobe delay time    | $t_{RSD}$  | $1/2t_{cyc}$            | $1/2t_{cyc} + 10$ | ns   | Figure 2.12 to Figure 2.19                                |
| Read data setup time 1    | $t_{RDS1}$ | $1/2t_{cyc} + 4/7^{*4}$ | —                 | ns   | Figure 2.12 to Figure 2.18                                |
| Read data setup time 2    | $t_{RDS2}$ | $6.6/10^{*4}$           | —                 | ns   | Figure 2.20 to Figure 2.23,<br>Figure 2.28 to Figure 2.30 |
| Read data setup time 3    | $t_{RDS3}$ | $1/2t_{cyc} + 4/7^{*4}$ | —                 | ns   | Figure 2.19                                               |
| Read data hold time 1     | $t_{RDH1}$ | 0                       | —                 | ns   | Figure 2.12 to Figure 2.18                                |
| Read data hold time 2     | $t_{RDH2}$ | 2                       | —                 | ns   | Figure 2.20 to Figure 2.23,<br>Figure 2.28 to Figure 2.30 |
| Read data hold time 3     | $t_{RDH3}$ | 0                       | —                 | ns   | Figure 2.19                                               |
| Write enable delay time 1 | $t_{WED1}$ | $1/2t_{cyc}$            | $1/2t_{cyc} + 10$ | ns   | Figure 2.12 to Figure 2.17                                |
| Write enable delay time 2 | $t_{WED2}$ | —                       | 10                | ns   | Figure 2.18                                               |
| Write data delay time 1   | $t_{WDD1}$ | —                       | 10                | ns   | Figure 2.12 to Figure 2.18                                |
| Write data delay time 2   | $t_{WDD2}$ | —                       | 10                | ns   | Figure 2.24 to Figure 2.27,<br>Figure 2.31 to Figure 2.33 |
| Write data hold time 1    | $t_{WDH1}$ | 1                       | —                 | ns   | Figure 2.12 to Figure 2.18                                |
| Write data hold time 2    | $t_{WDH2}$ | 2                       | —                 | ns   | Figure 2.24 to Figure 2.27,<br>Figure 2.31 to Figure 2.33 |
| Write data hold time 4    | $t_{WDH4}$ | 0                       | —                 | ns   | Figure 2.12 to Figure 2.16                                |

**Table 2.17 Bus Timing (2 / 2)**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30$  pF

| Item                         | Symbol      | CKIO = 75 MHz*1           |                   | Unit | Reference Figure           |
|------------------------------|-------------|---------------------------|-------------------|------|----------------------------|
|                              |             | Min.                      | Max.              |      |                            |
| WAIT# setup time             | $t_{WTS}$   | $1/2t_{cyc} + 4.5/8^{*4}$ | —                 | ns   | Figure 2.13 to Figure 2.19 |
| WAIT# hold time              | $t_{WTH}$   | $1/2t_{cyc} + 3.5$        | —                 | ns   | Figure 2.13 to Figure 2.19 |
| RAS# delay time 1            | $t_{RASD1}$ | 2                         | 10                | ns   | Figure 2.20 to Figure 2.36 |
| CAS# delay time 1            | $t_{CASD1}$ | 2                         | 10                | ns   | Figure 2.20 to Figure 2.36 |
| DQM delay time 1             | $t_{DQMD1}$ | 2                         | 10                | ns   | Figure 2.20 to Figure 2.33 |
| CKE delay time 1             | $t_{CKED1}$ | 2                         | 10                | ns   | Figure 2.35                |
| AH# delay time               | $t_{AHD}$   | $1/2t_{cyc}$              | $1/2t_{cyc} + 10$ | ns   | Figure 2.16                |
| Multiplex address delay time | $t_{MAD}$   | —                         | 10                | ns   | Figure 2.16                |
| Multiplex address hold time  | $t_{MAH}$   | 1                         | —                 | ns   | Figure 2.16                |
| Address setup time to AH#    | $t_{AVVH}$  | $1/2t_{cyc} - 2$          | —                 | ns   | Figure 2.16                |
| DACK/TEND delay time         | $t_{DACD}$  | See DMAC timing           | See DMAC timing   | ns   | Figure 2.12 to Figure 2.33 |

Note 1. Examine the fmax value of CKIO (external bus clock) together with the number of waits in accordance with system configuration.


When CKIO is used at a frequency of or above 50 MHz, set the CKIO driving ability at 8 mA (CKIOSET = 0h).

When the CKIO is to be used at a frequency below 50 MHz, the CKIO can be set to 4 mA. In this case, set the CKIOSET bits to Ah.

Note 2. Notation of  $1/2t_{cyc}$  in the delay time, setup time, and hold time shows 1/2 cycles from the clock rising edge, that is, the reference of clock falling.


Note 3. Values when SDRAM is used.

Note 4. Values when CKIO driving ability is set at 8 mA/4 mA.

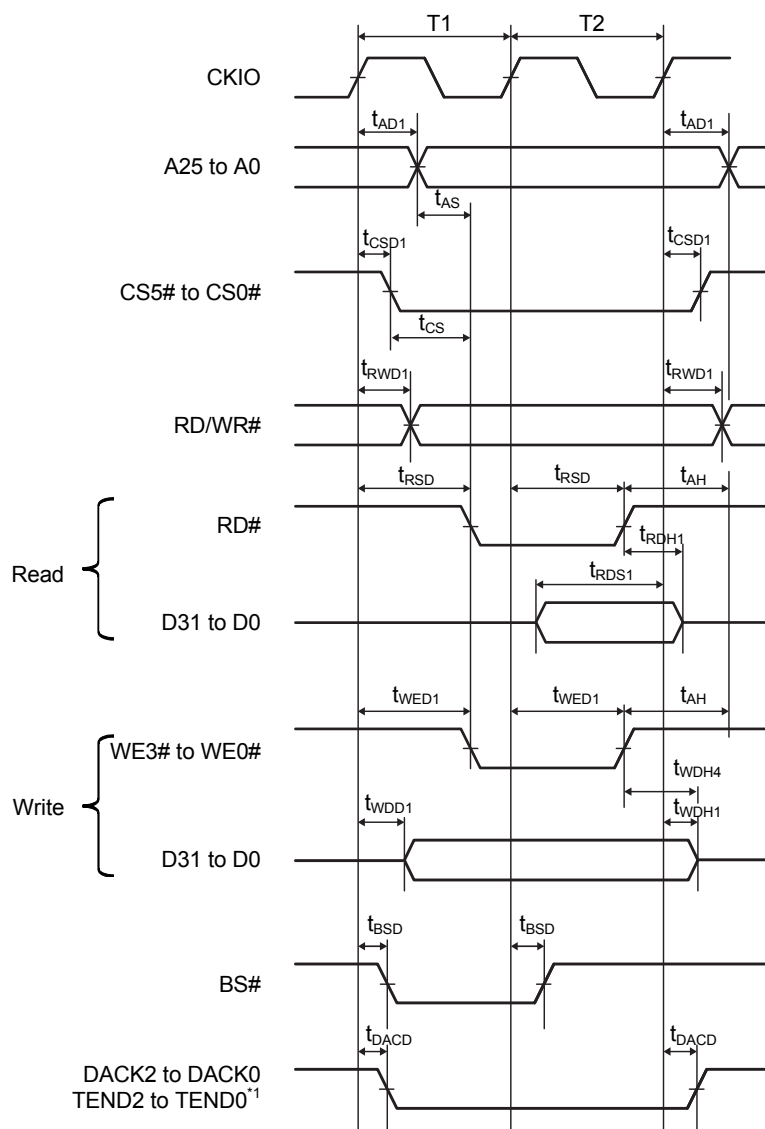


Note 1. DACK<sub>n</sub> and TEND<sub>n</sub> are waveforms when "active low" is specified.

Figure 2.12 SRAM Interface Basic Bus Cycle (No Wait)

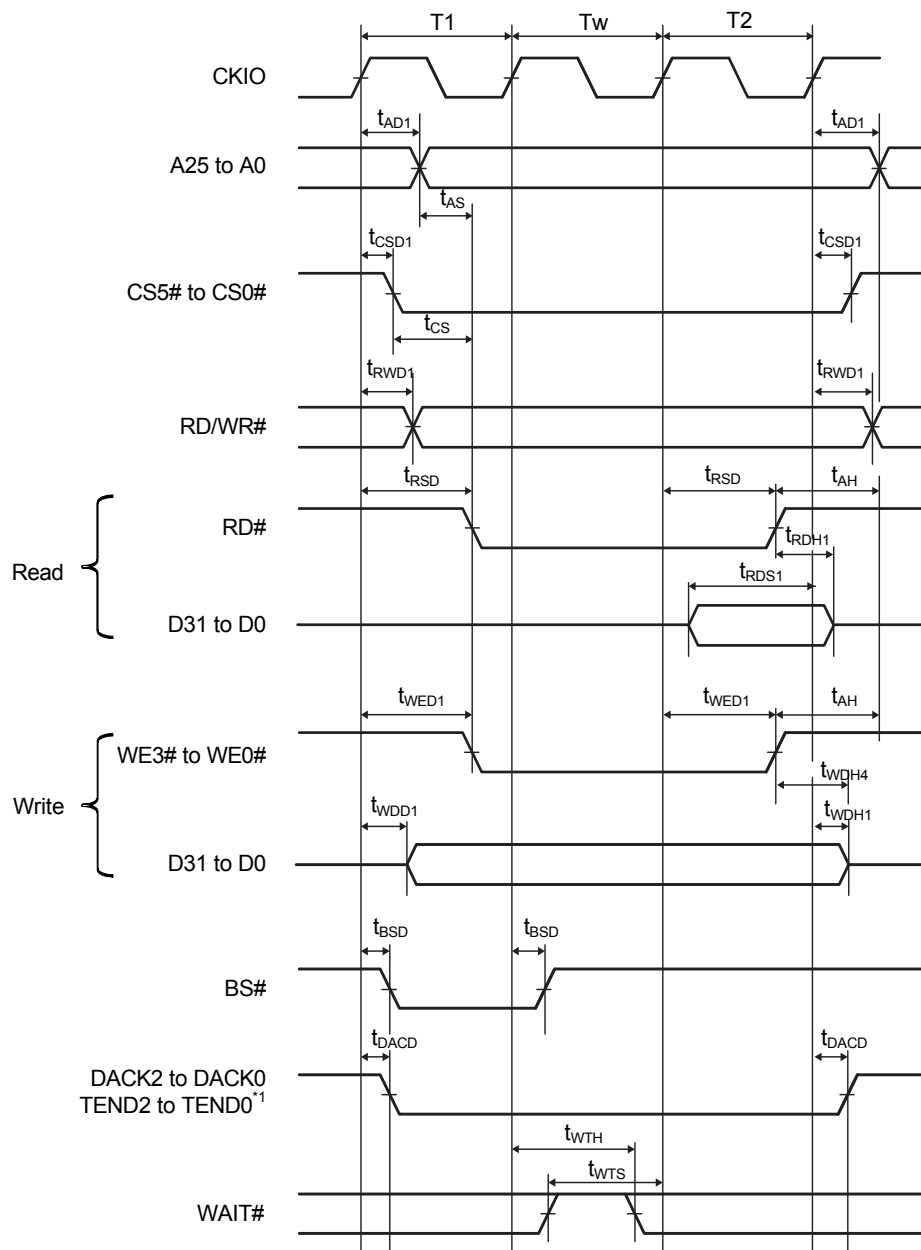


Note 1. DACKn and TENDn are waveforms when "active low" is specified.

Figure 2.13 SRAM Interface Basic Bus Cycle (Software Wait 1)

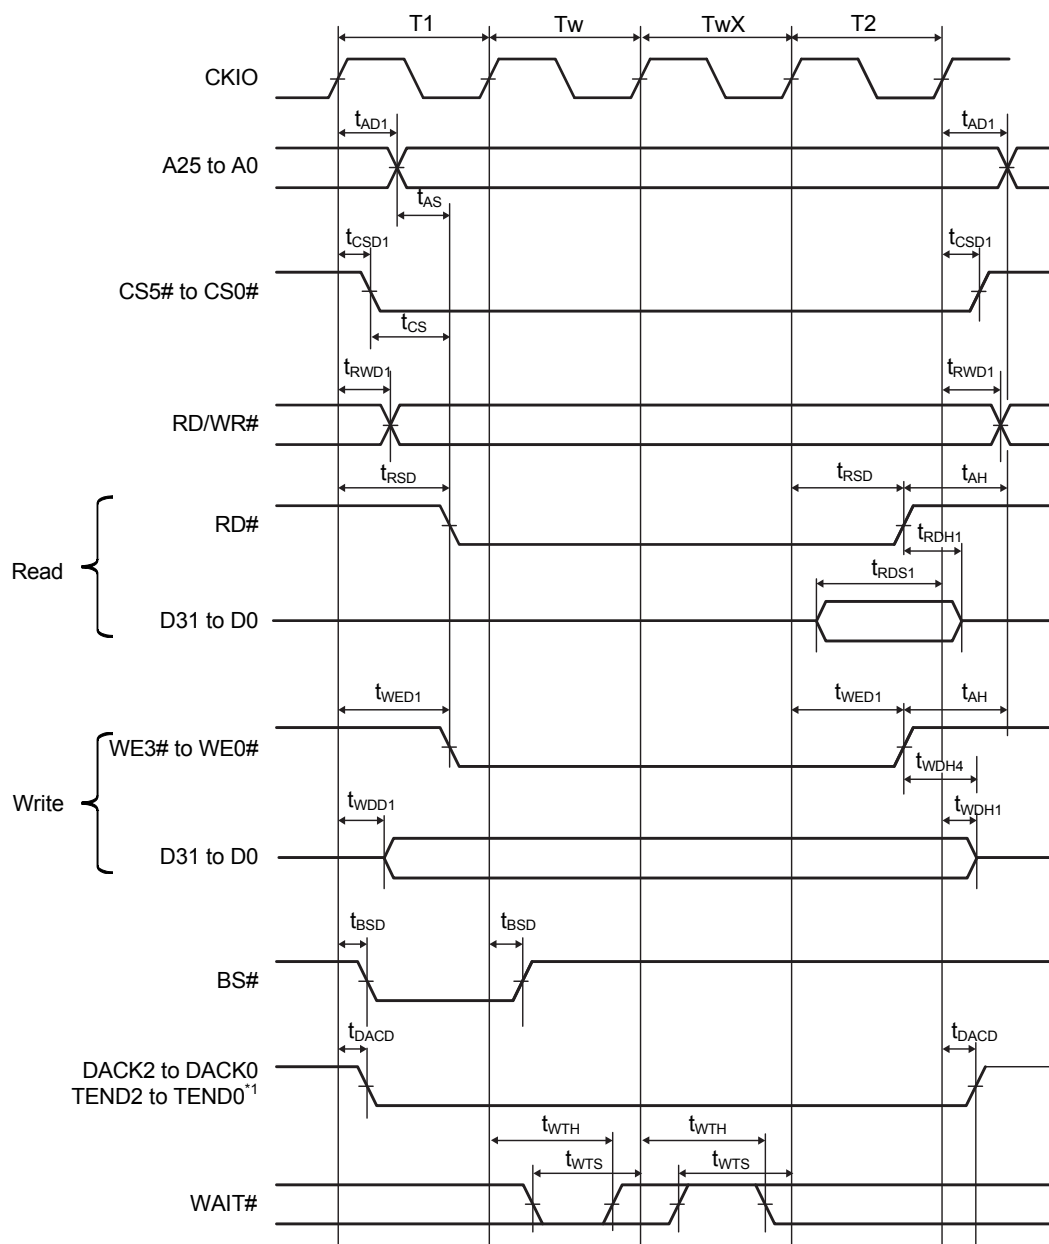


Note 1. DACKn and TENDn are waveforms when "active low" is specified.

Figure 2.14 SRAM Interface Basic Bus Cycle (Software Wait 1, External Wait 1 Inserted)

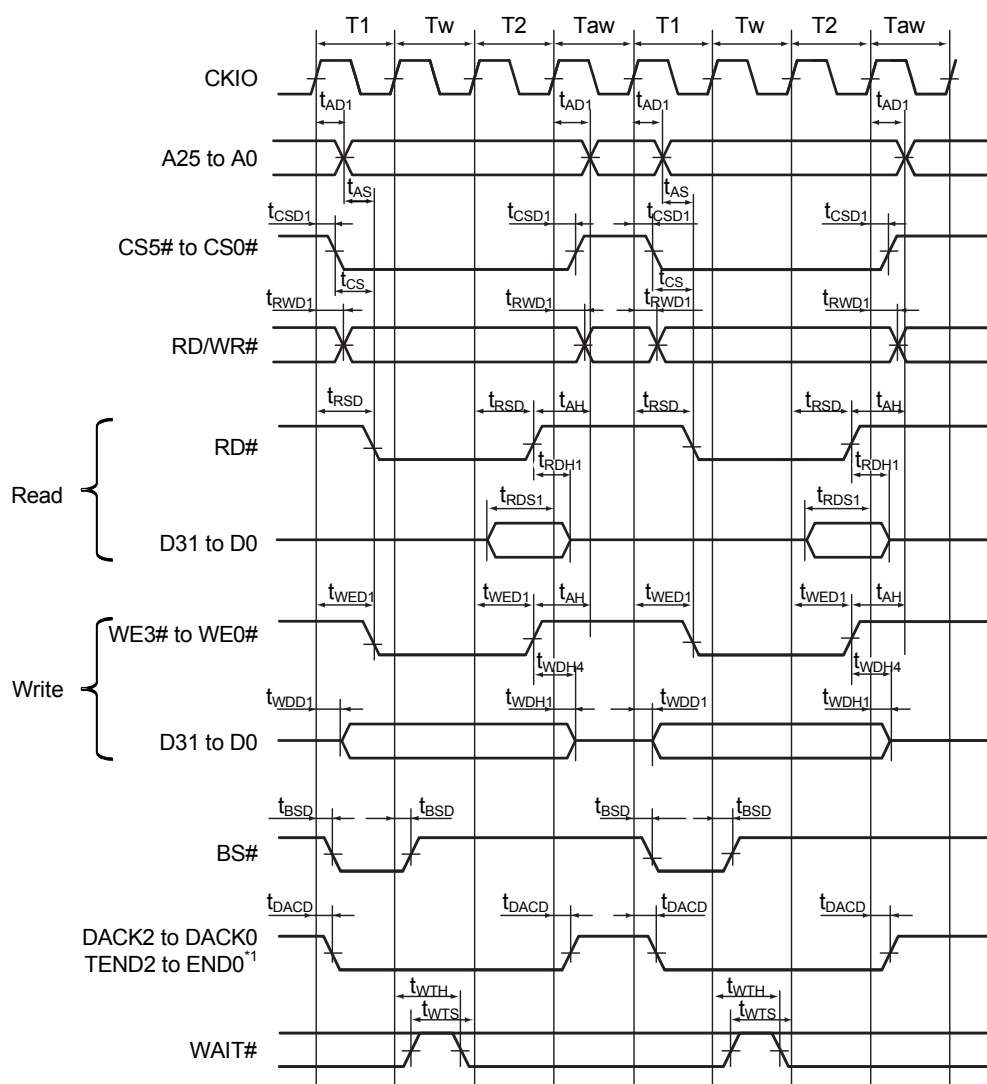

Note 1. DACKn and TENDn are waveforms when "active low" is specified.

**Figure 2.15** SRAM Interface Basic Bus Cycle (Software Wait 1, External wait Enabled (WM Bit = 0), No Idle Cycle)

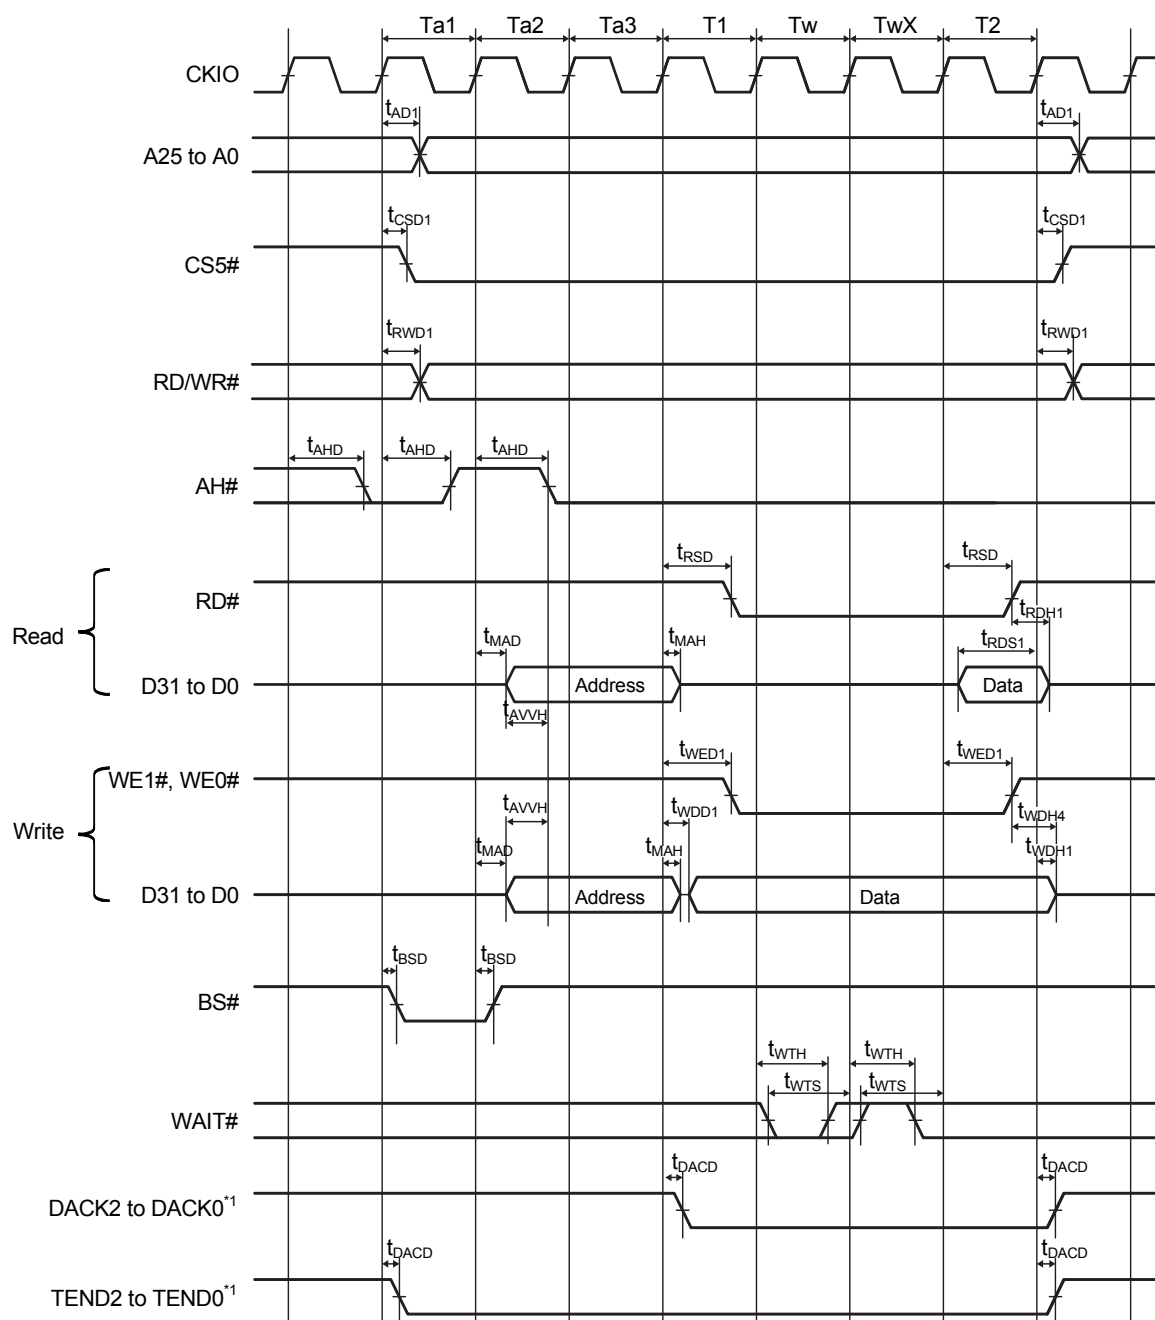


Note 1. DACKn and TENDn are waveforms when “active low” is specified.

Figure 2.16 MPX-I/O Interface Bus Cycle (Address Cycle 3, Software Wait 1, External Wait 1 Inserted)




R01DS0228EJ0110 Rev.1.10  
Jul 08, 2016

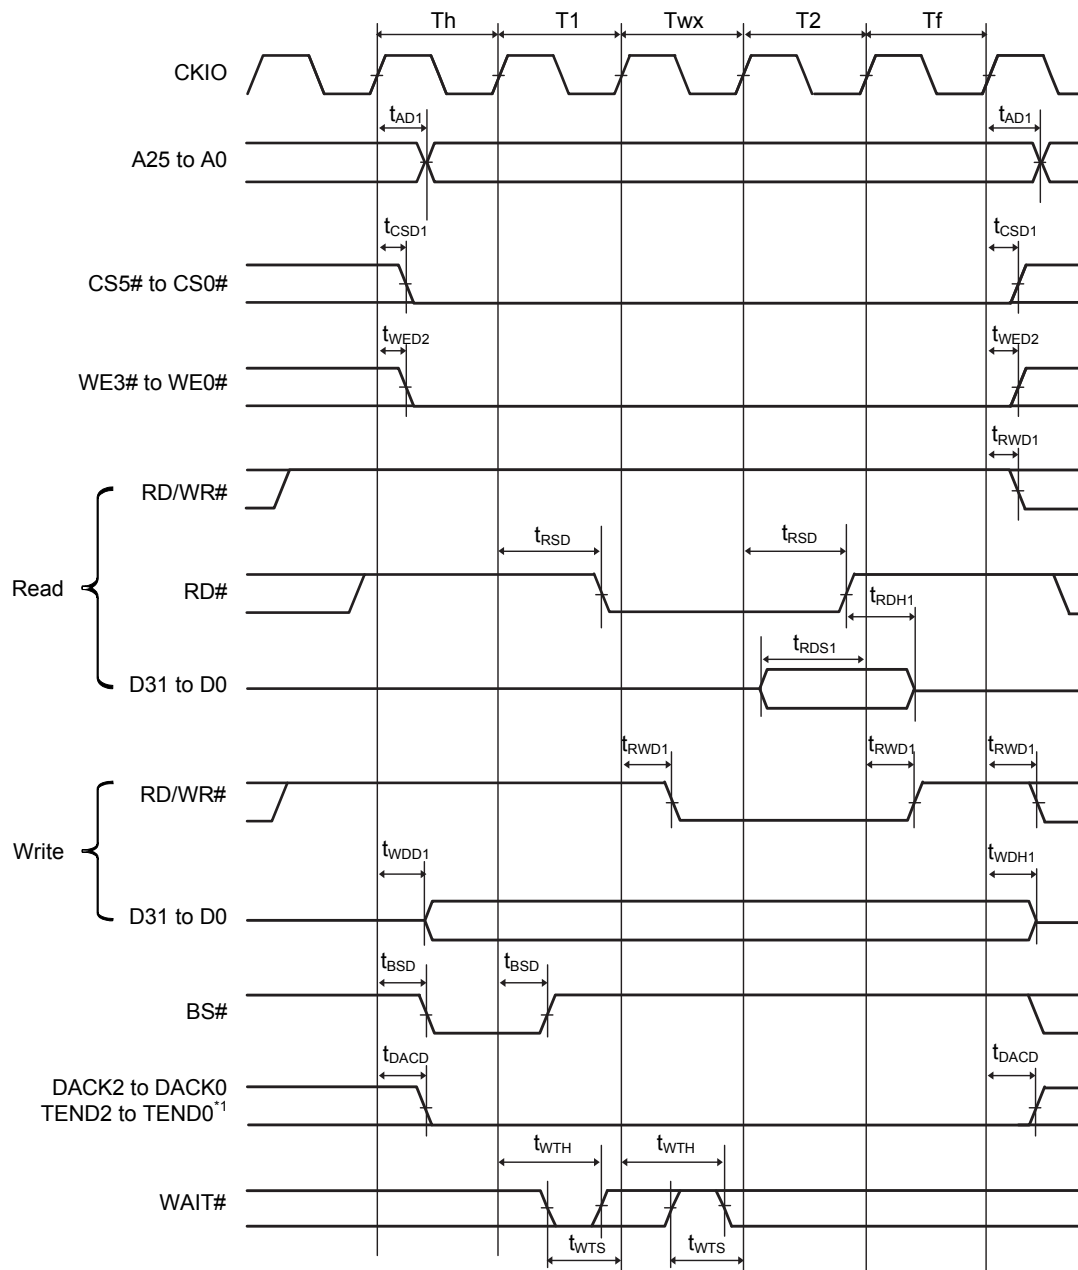


Note 1. DACKn and TENDn are waveforms when "active low" is specified.

**Figure 2.18** SRAM Bus Cycle with Byte Selection (SW = 1 Cycle, HW = 1 Cycle, Asynchronous External Wait 1 Inserted, BAS = 1 (Write Cycle WE Control))

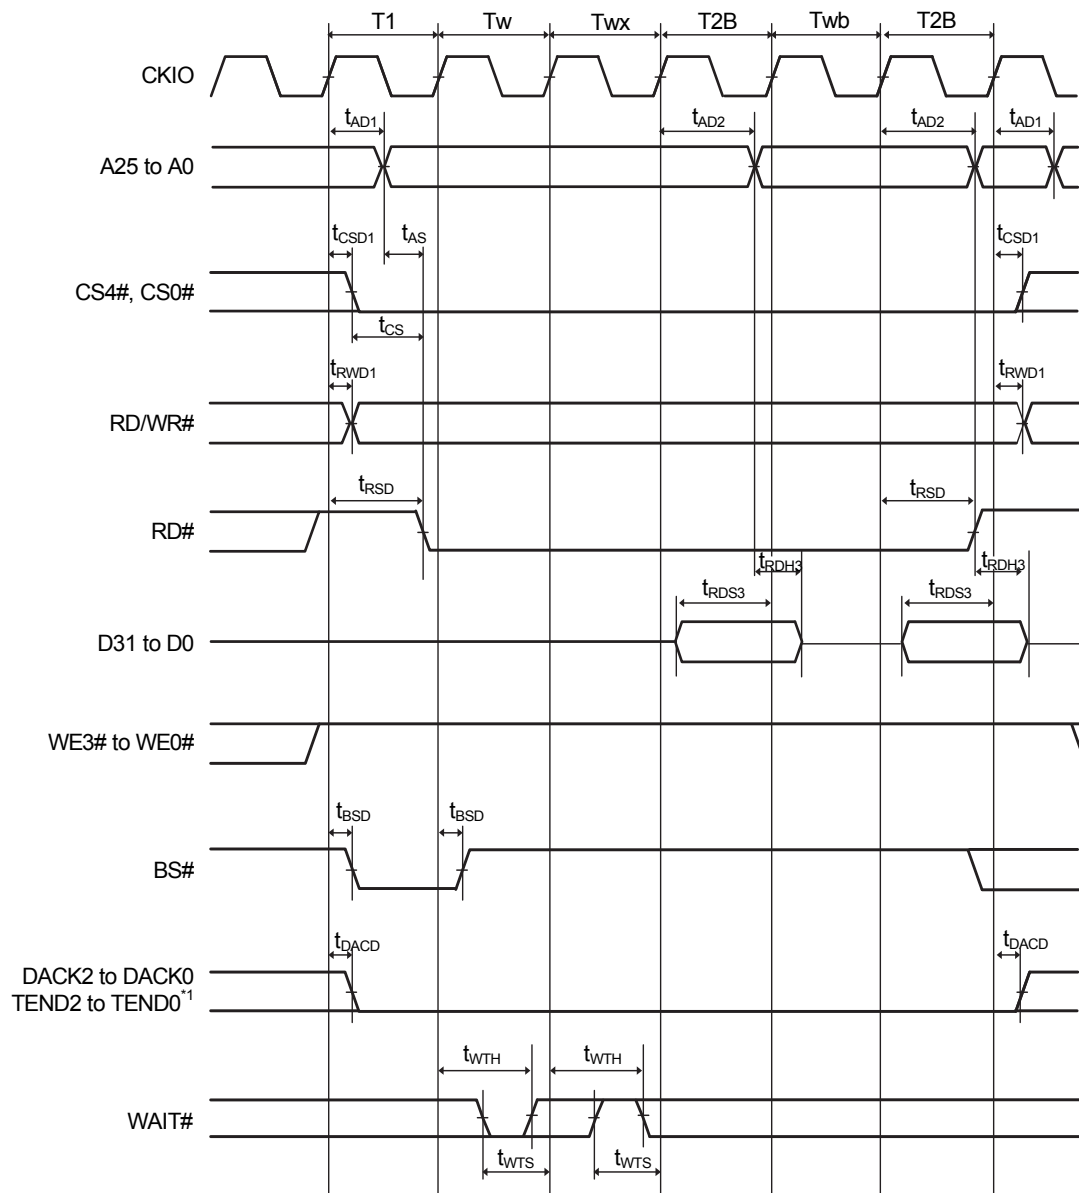

Note 1. DACKn and TENDn are waveforms when "active low" is specified.


Figure 2.19 Burst ROM Read Cycle (Software Wait 1, Asynchronous External Wait 1 Inserted, Burst Wait 1, 2)

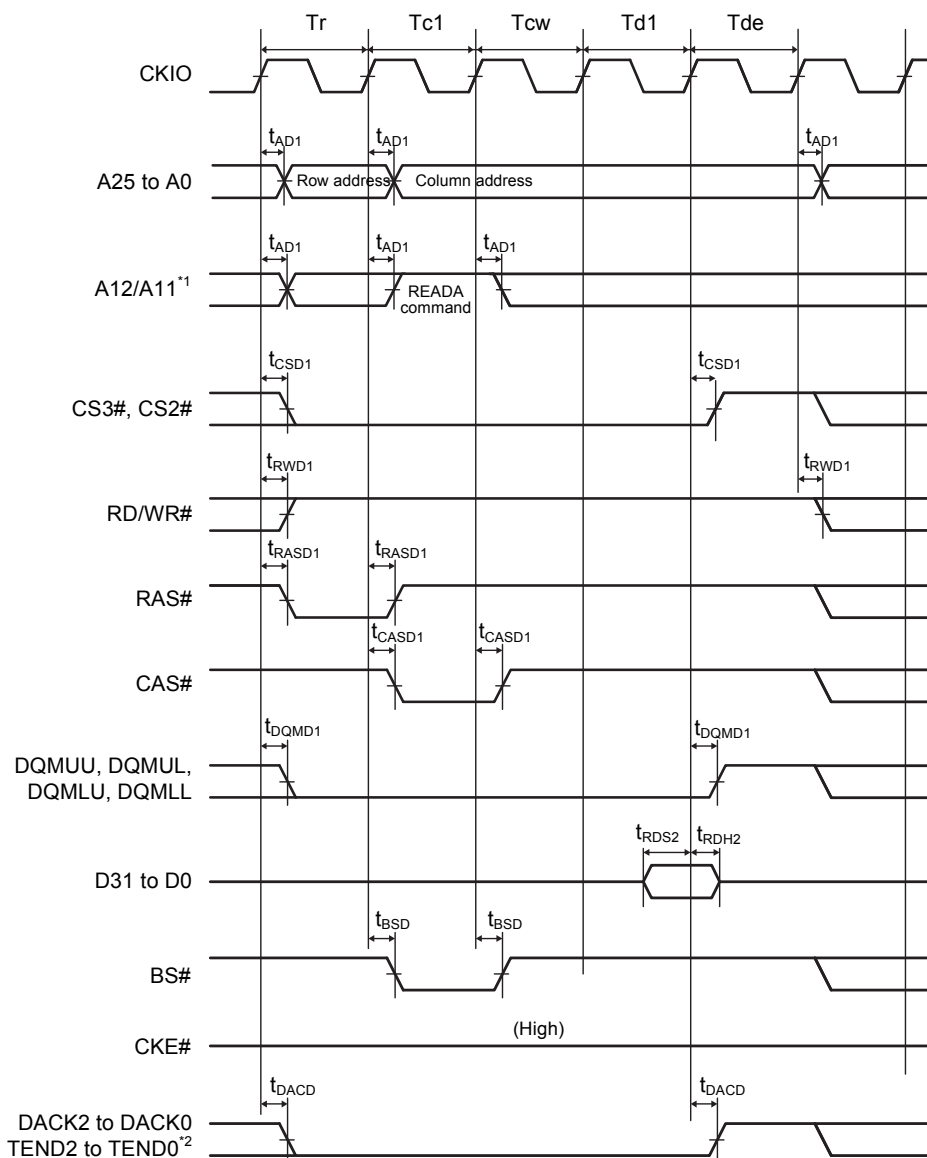

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.20 Synchronous DRAM Single-Read Bus Cycle (with Auto Precharge, CAS Latency 2, WTRCD = 0 Cycles, WTRP = 0 Cycles)**

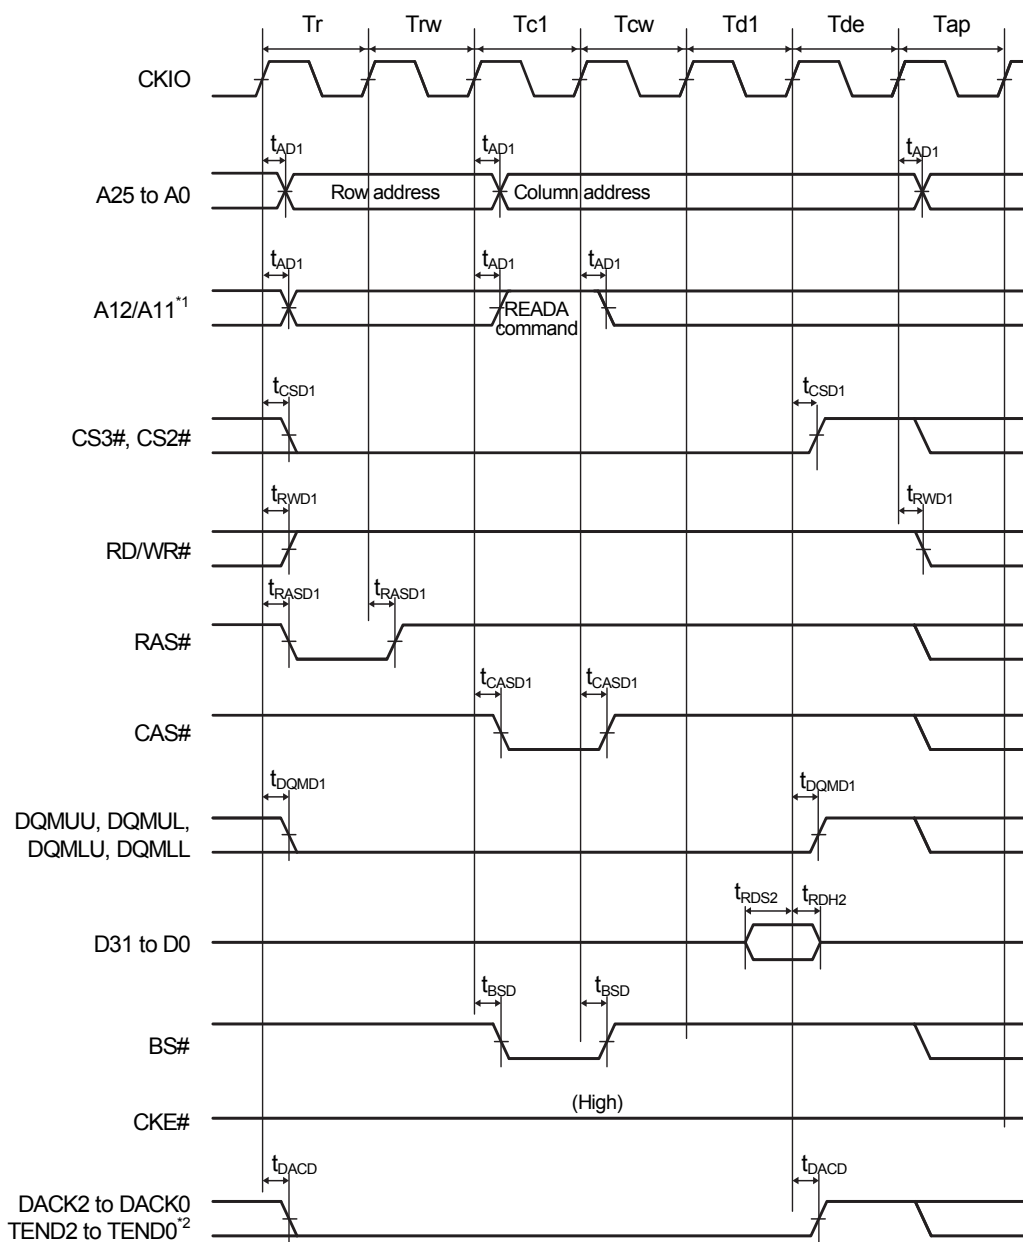

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.21 Synchronous DRAM Single-Read Bus Cycle (with Auto Precharge, CAS Latency 2, WTRCD = 1 Cycle, WTRP = 1 Cycle)**

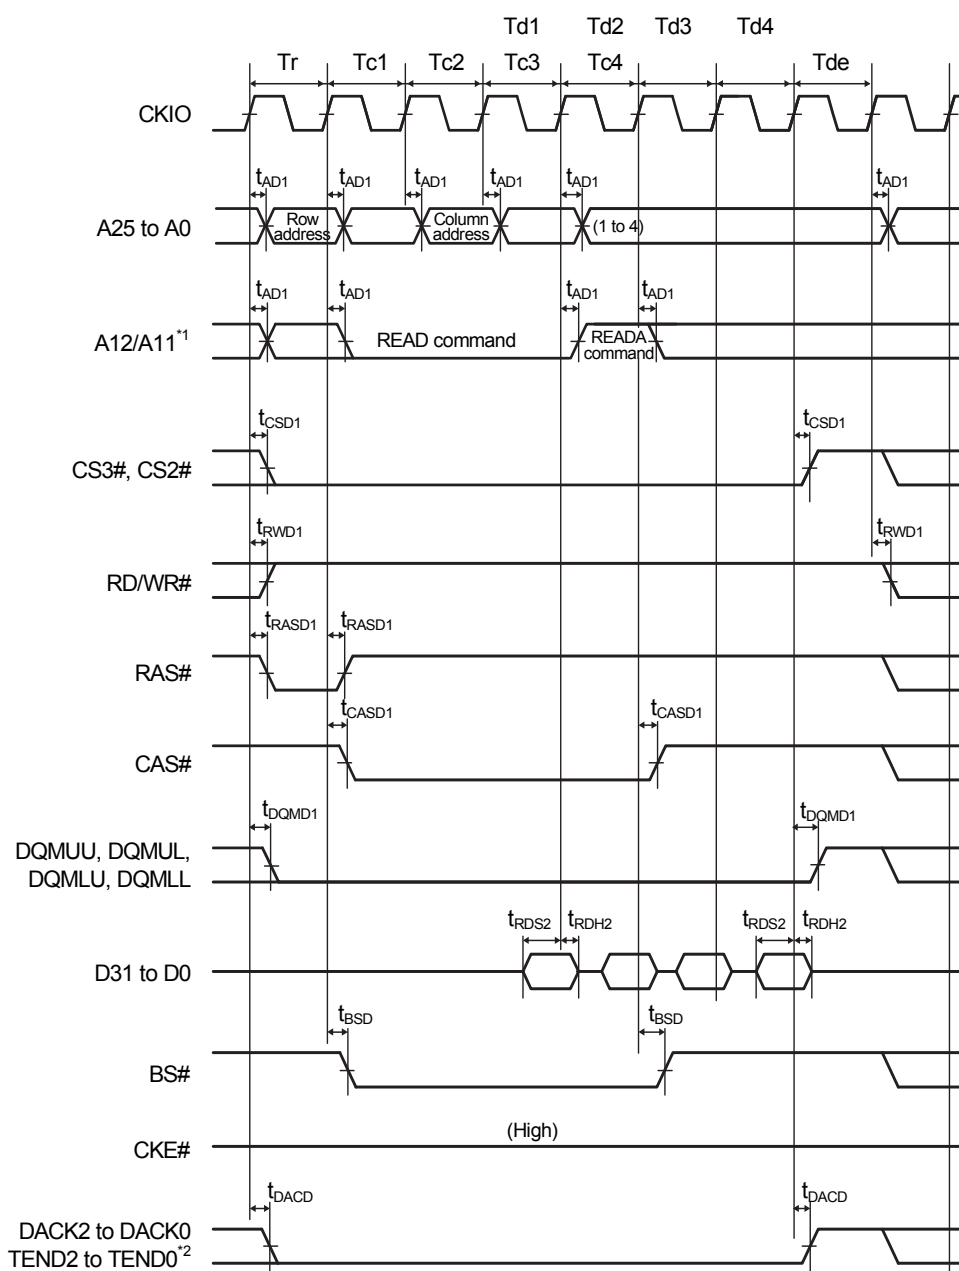

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.22 Synchronous DRAM Burst-Read Bus Cycle (Read for 4 Cycles) (with Auto Precharge, CAS Latency 2, WTRCD = 0 Cycles, WTRP = 1 Cycle)**

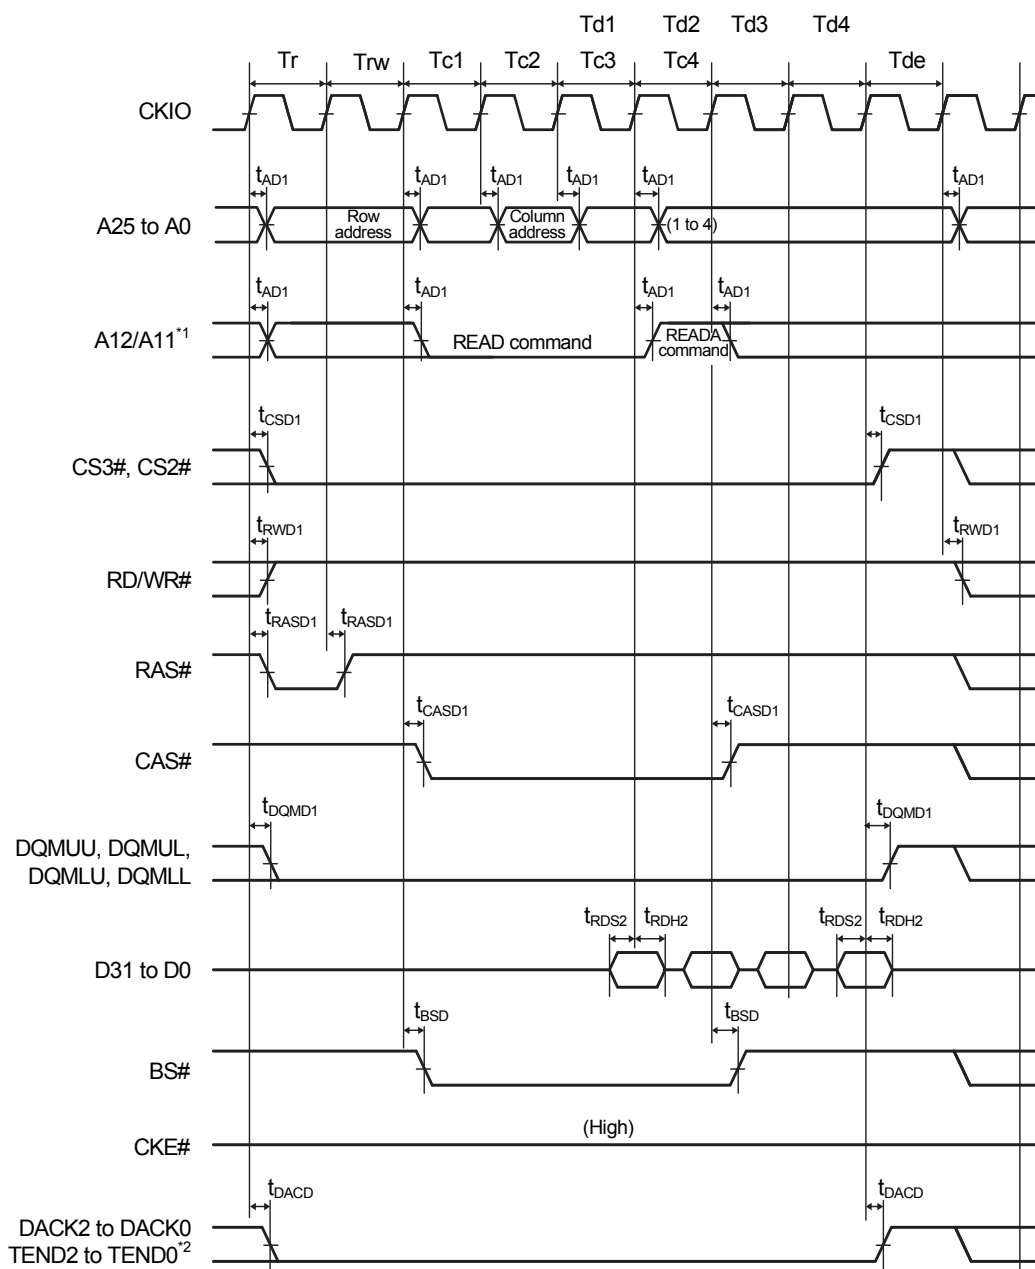

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.23 Synchronous DRAM Burst-Read Bus Cycle (Read for 4 Cycles) (with Auto Precharge, CAS Latency 2, WTRCD = 1 Cycle, WTRP = 0 Cycles)**

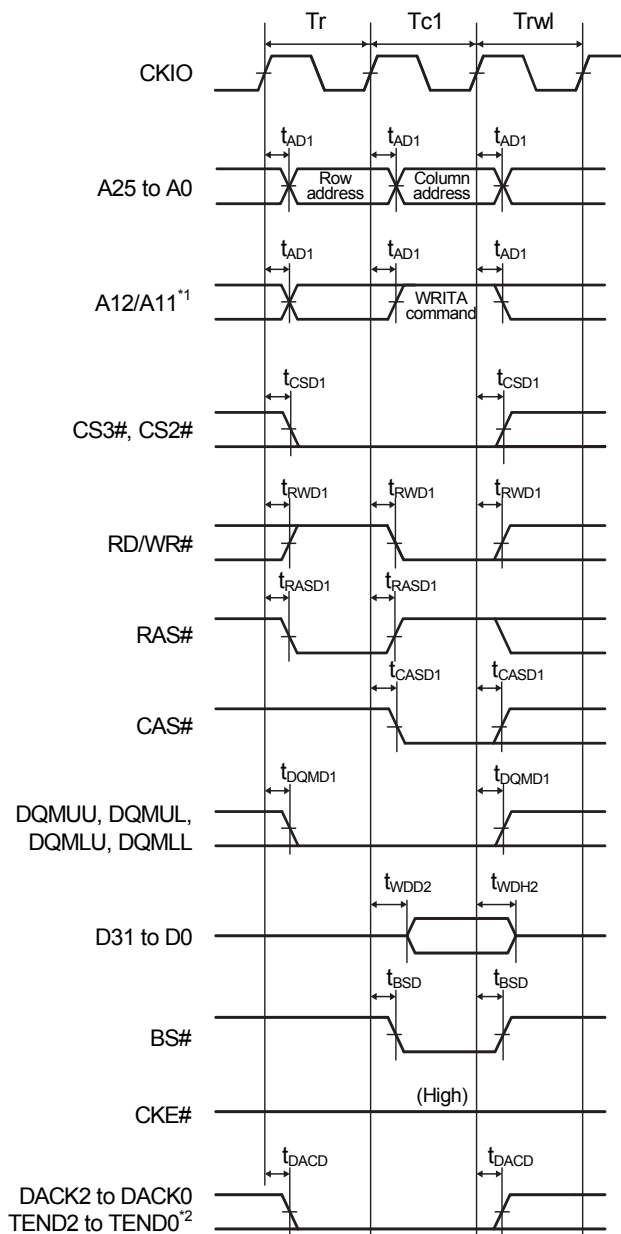

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


Figure 2.24 Synchronous DRAM Single-Write Bus Cycle (with Auto Precharge, TRWL = 1 Cycle)

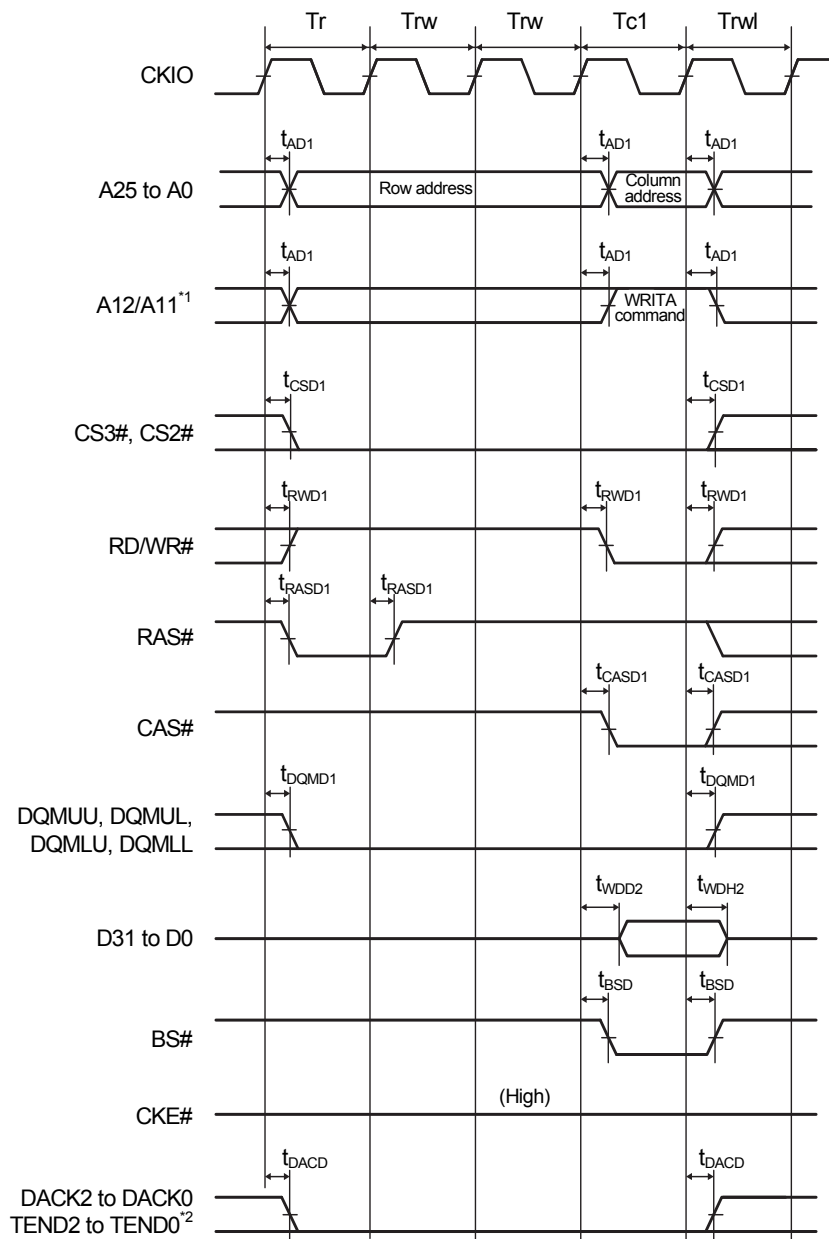

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.25 Synchronous DRAM Single-Write Bus Cycle (with Auto Precharge, WTRCD = 2 Cycles, TRWL = 1 Cycle)**

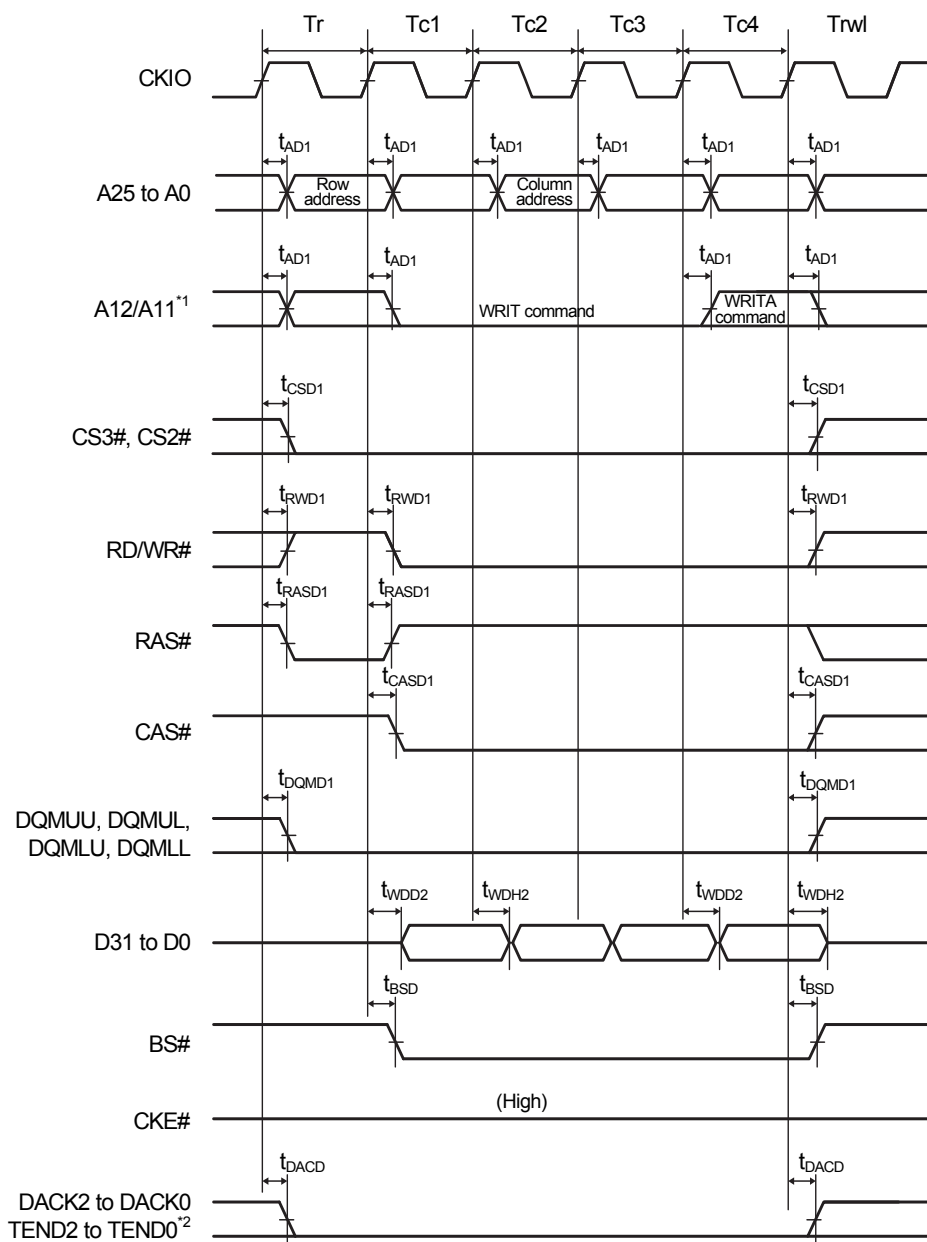

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.26 Synchronous DRAM Burst-Write Bus Cycle (Write for 4 Cycles) (with Auto Precharge, WTRCD = 0 Cycles, TRWL = 1 Cycle)**

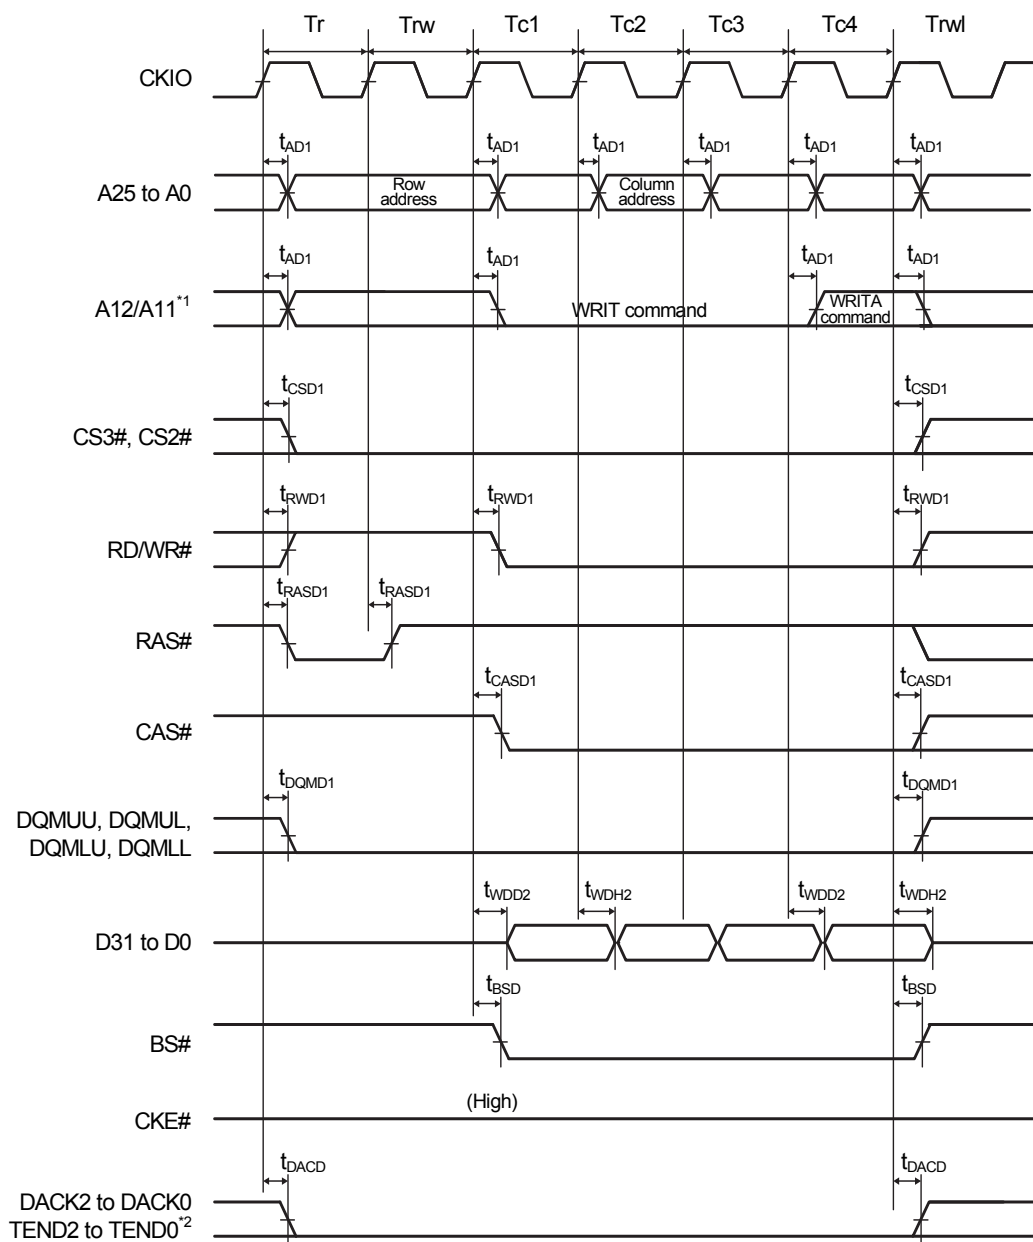

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.27 Synchronous DRAM Burst-Write Bus Cycle (Write for 4 Cycles) (with Auto Precharge, WTRCD = 1 Cycle, TRWL = 1 Cycle)**

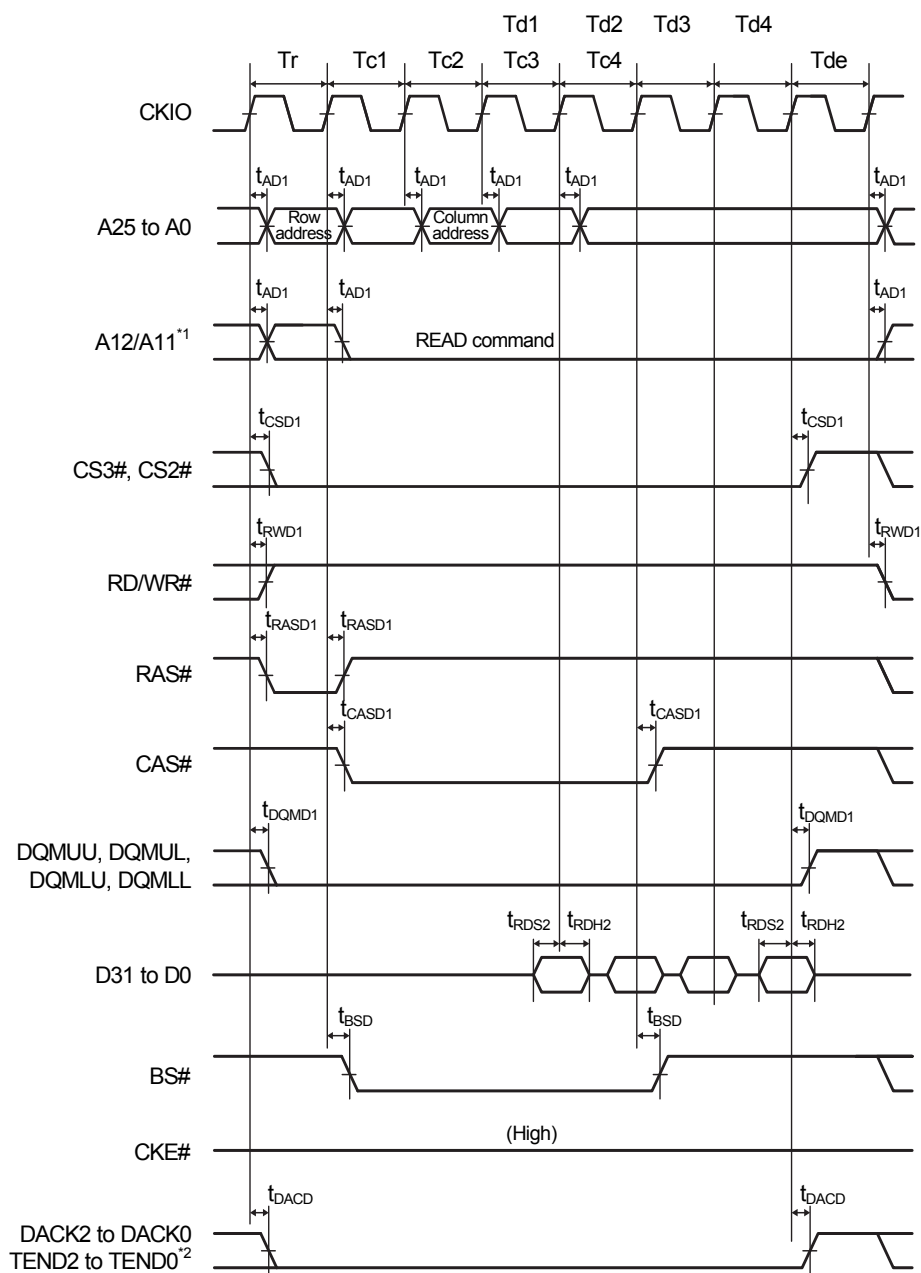

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.28 Synchronous DRAM Burst-Read Bus Cycle (Read for 4 Cycles) (Bank Active Mode: ACT + READ Command, CAS Latency 2, WTRCD = 0 Cycles)**

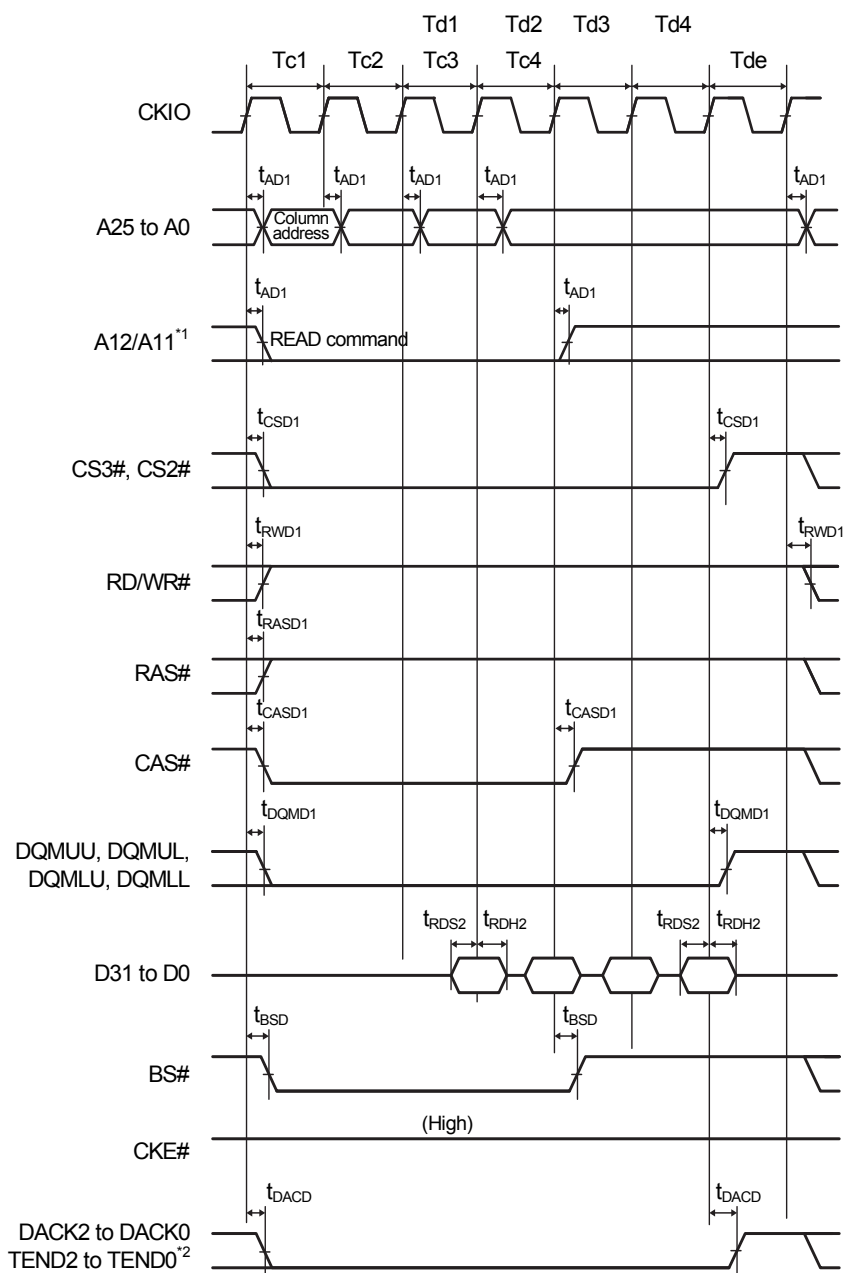

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.29 Synchronous DRAM Burst-Read Bus Cycle (Read for 4 Cycles) (Bank Active Mode: READ Command, Same Row Address, CAS Latency 2, WTRCD = 0 Cycles)**

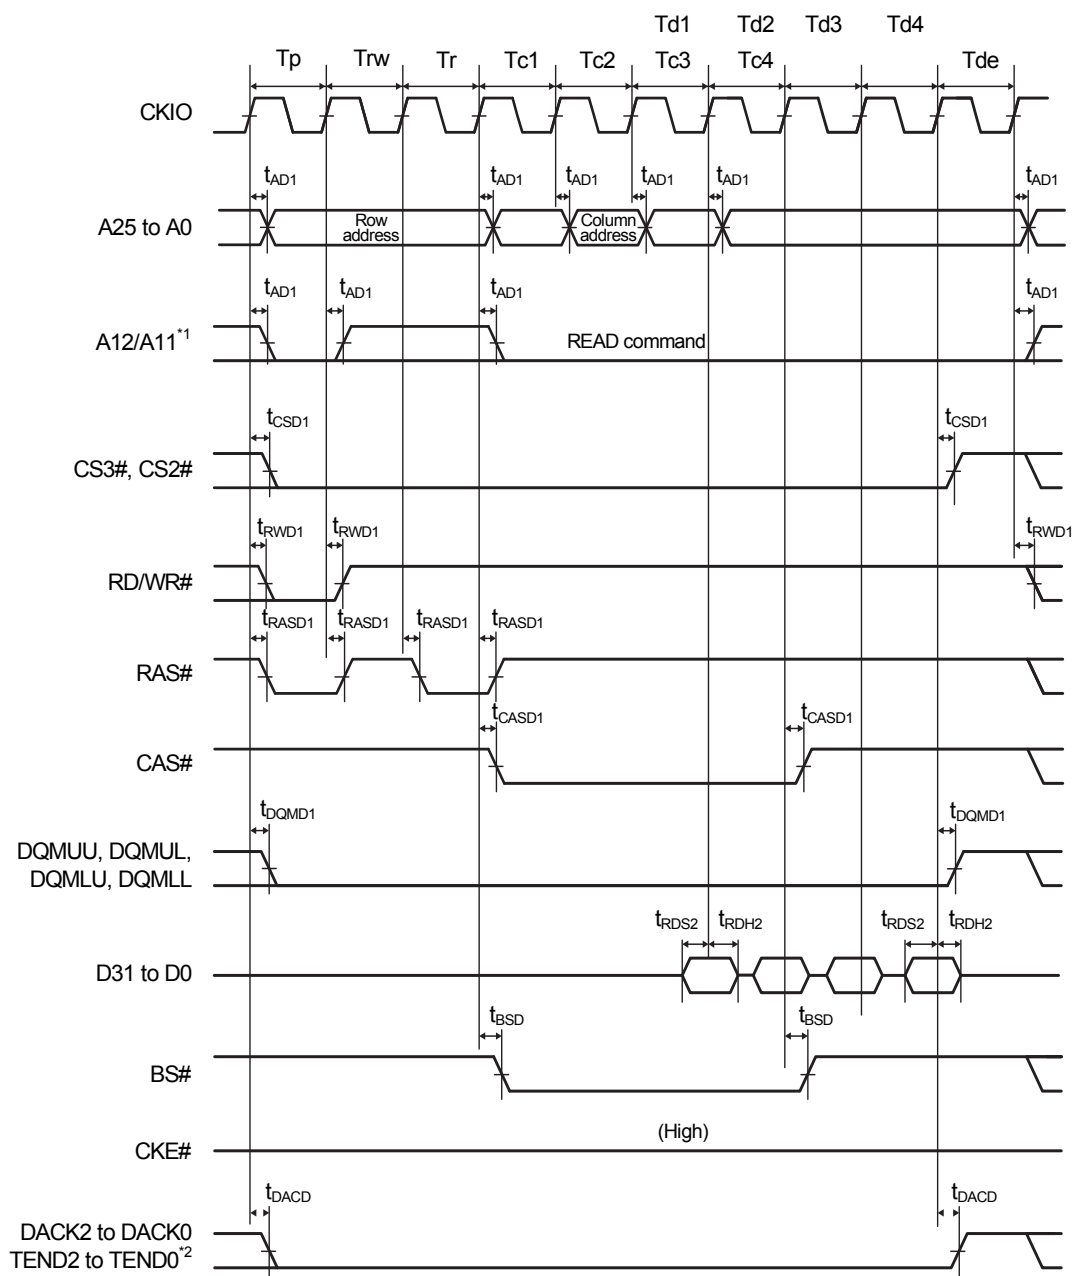

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.30 Synchronous DRAM Burst-Read Bus Cycle (Read for 4 Cycles) (Bank Active Mode: PRE + ACT + READ Command, Different Row Address, CAS Latency 2, WTRCD = 0 Cycles)**

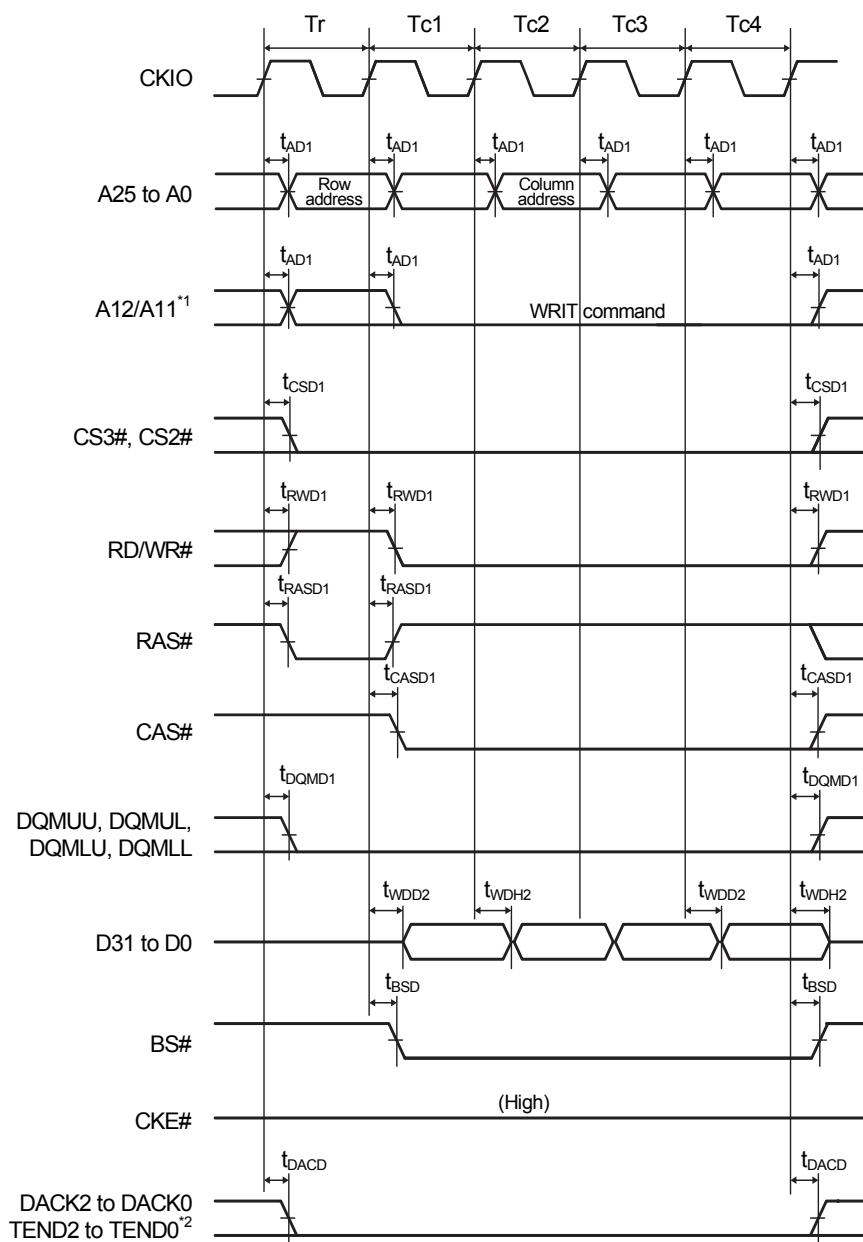

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACK<sub>n</sub> and TEND<sub>n</sub> are waveforms when "active low" is specified.


**Figure 2.31 Synchronous DRAM Burst-Write Bus Cycle (Write for 4 Cycles) (Bank Active Mode: ACT + WRITE Command, WTRCD = 0 Cycles, TRWL = 0 Cycles)**

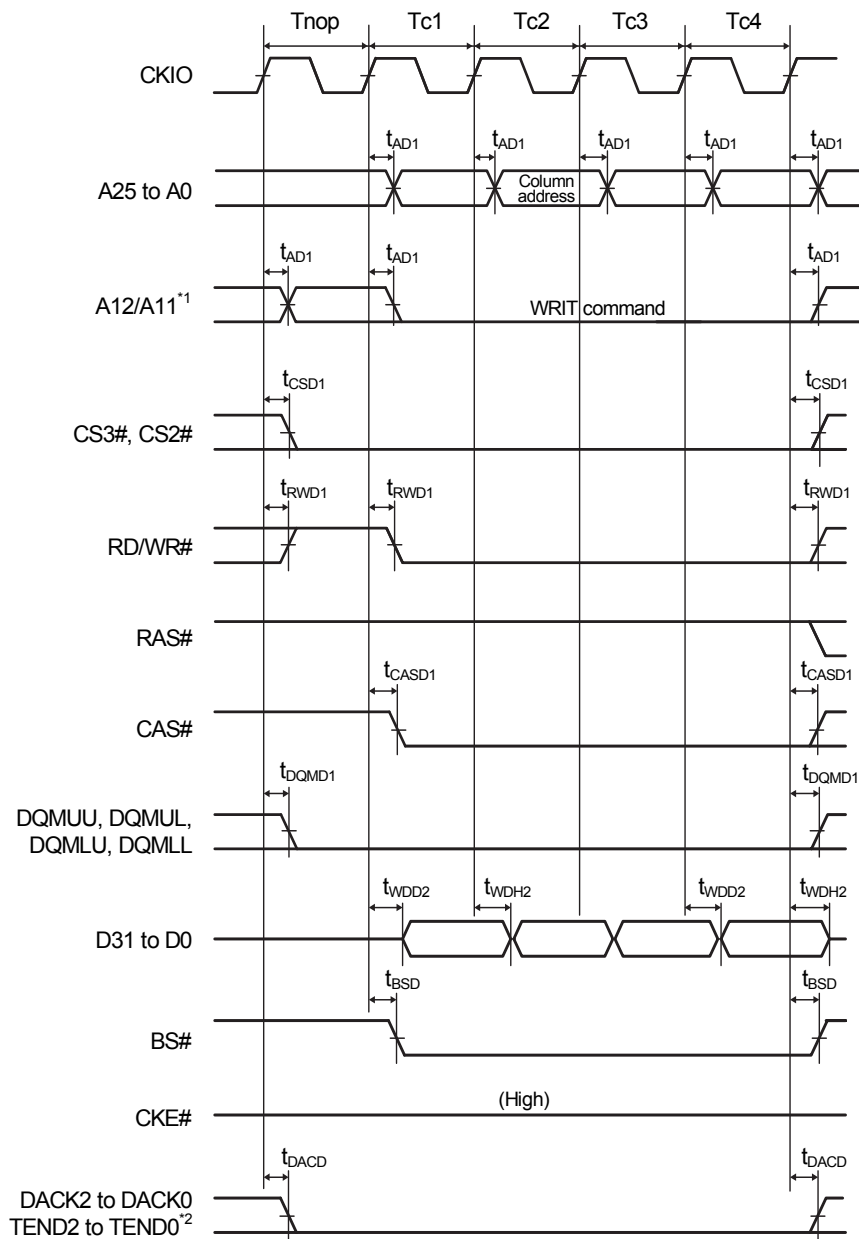

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACK<sub>n</sub> and TEND<sub>n</sub> are waveforms when "active low" is specified.


**Figure 2.32 Synchronous DRAM Burst-Write Bus Cycle (Write for 4 Cycles) (Bank Active Mode: WRITE Command, Same Row Address, WTRCD = 0 Cycles, TRWL = 0 Cycles)**

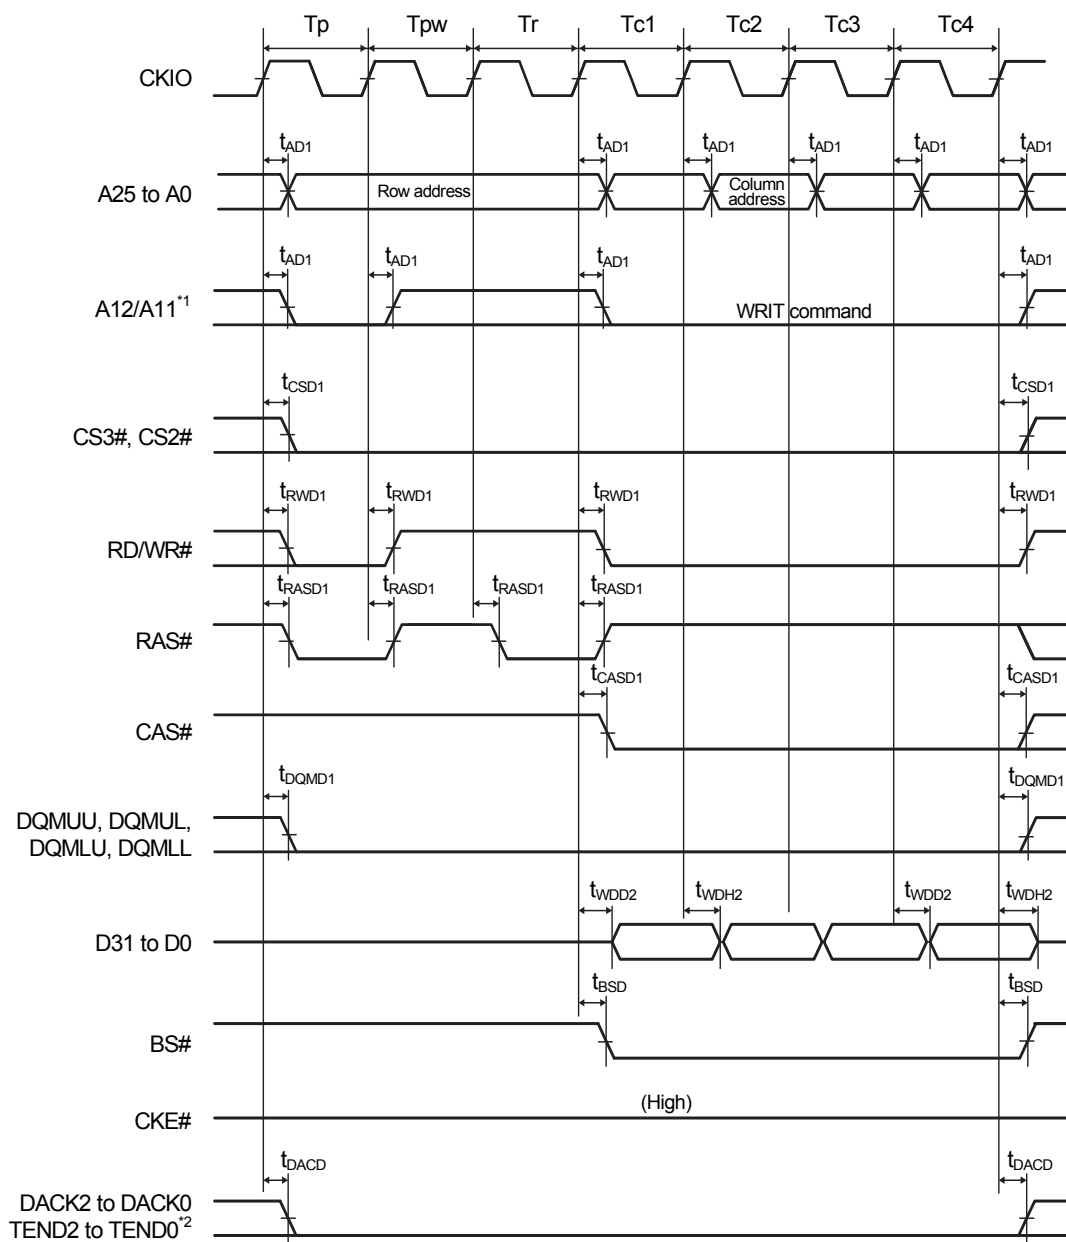

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


**Figure 2.33 Synchronous DRAM Burst-Write Bus Cycle (Write for 4 Cycles) (Bank Active Mode: PRE + ACT + WRITE Command, Different Row Address, WTRCD = 0 Cycles, TRWL = 0 Cycles)**

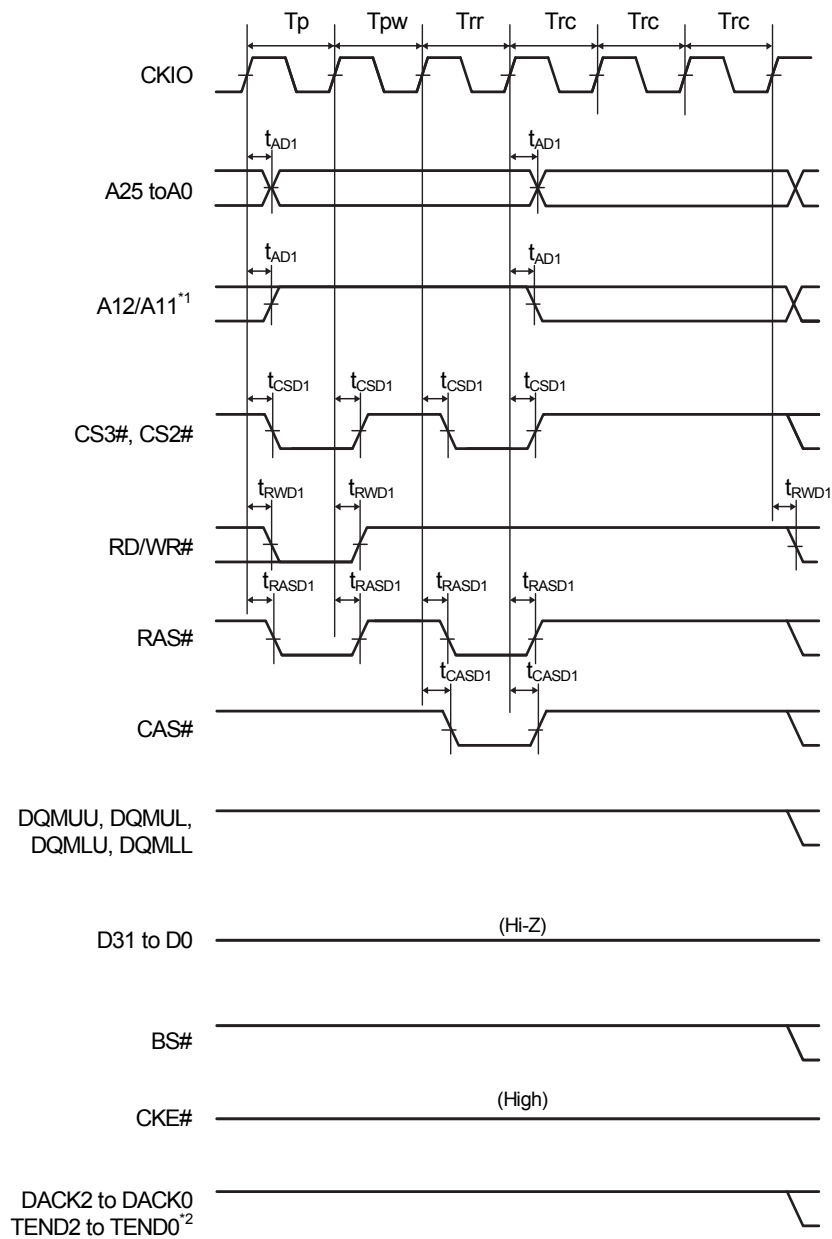

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.


Figure 2.34 Synchronous DRAM Auto-Refresh Timing (WTRP = 1 Cycle, WTRC = 3 Cycles)

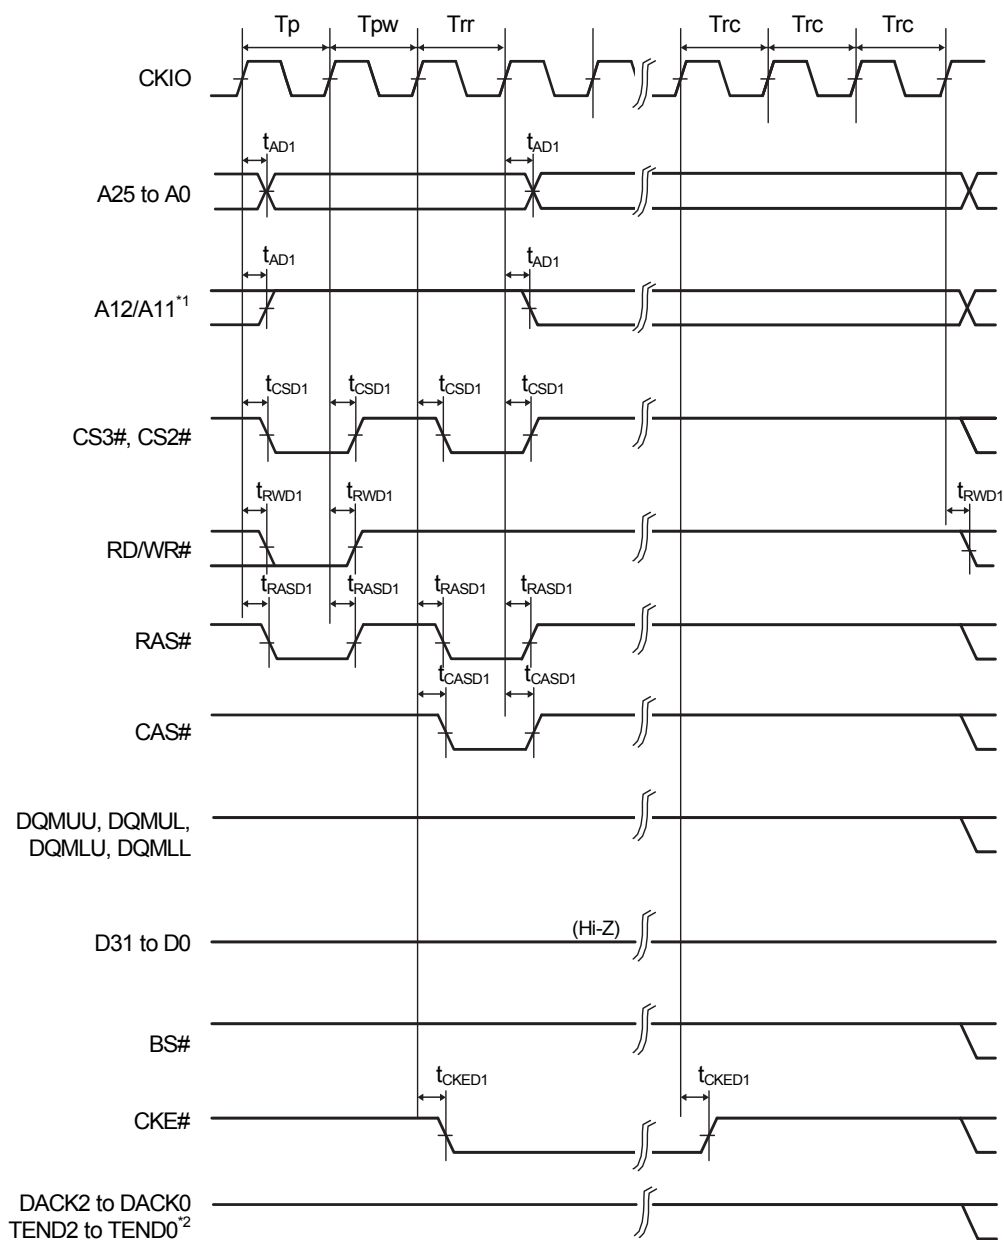

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.

Figure 2.35 Synchronous DRAM Self-Refresh Timing (WTRP = 1 Cycle)

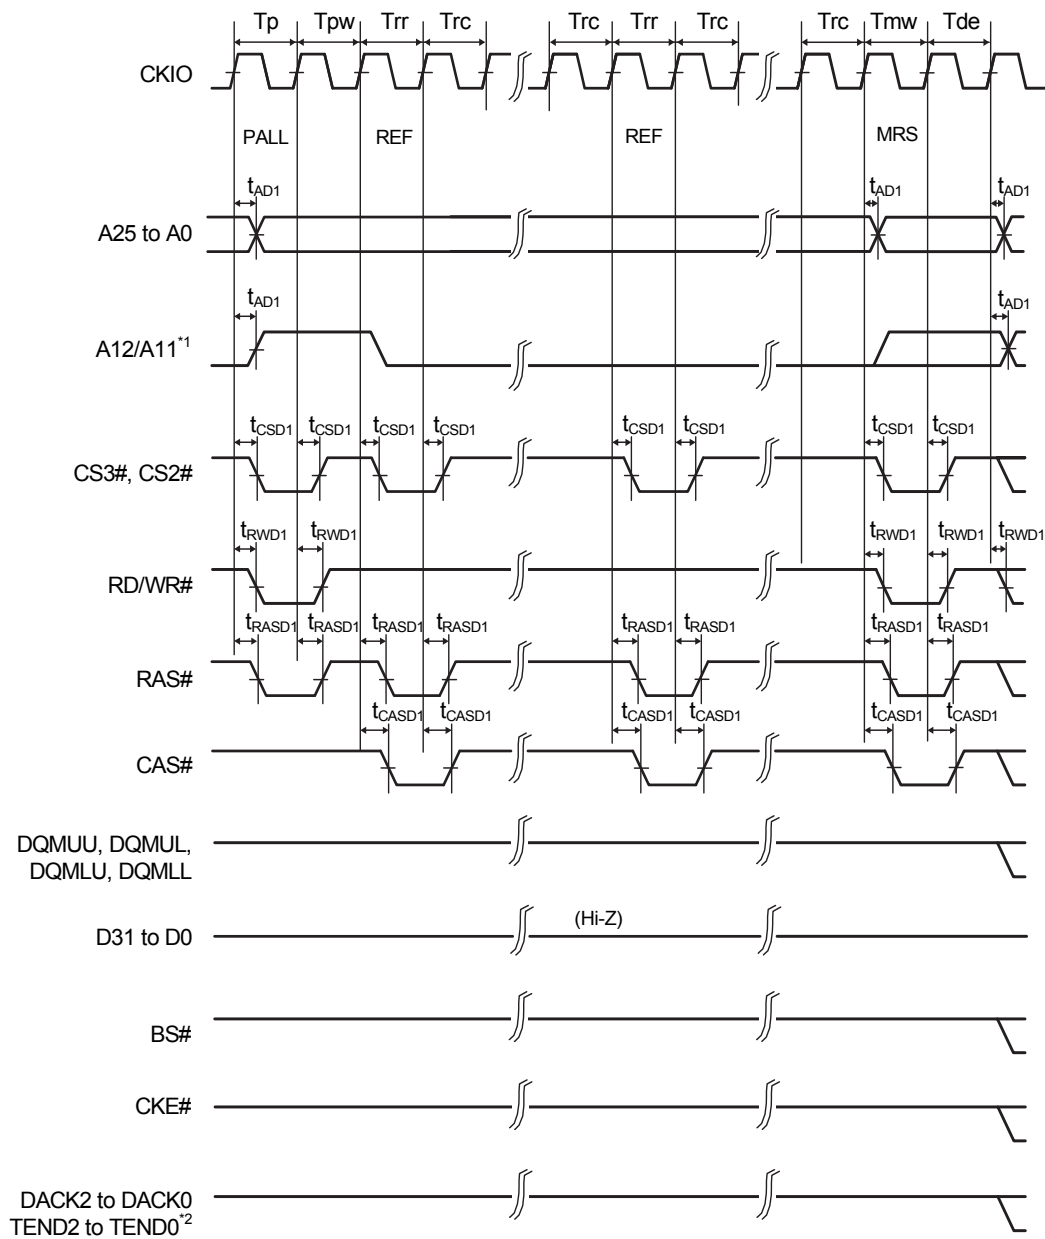

Note 1. Address pin to be connected to A10 of SDRAM

Note 2. DACKn and TENDn are waveforms when "active low" is specified.

Figure 2.36 Synchronous DRAM Mode Register Write Timing ( $WTRP = 1$  Cycle)


## 2.4.4 DMAC Timing

**Table 2.18 DMAC Timing**


Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30 \text{ pF}$

| Item | Symbol                   | min*1      | max | Unit | Test Conditions |
|------|--------------------------|------------|-----|------|-----------------|
| DMAC | DREQ pulse width         | $t_{DRQW}$ | —   | ns   | Figure 2.37     |
|      | DACK and TEND delay time | $t_{DADC}$ | 10  | ns   | Figure 2.38     |

Note 1.  $t_{PBcyc}$ : PCLKB cycle

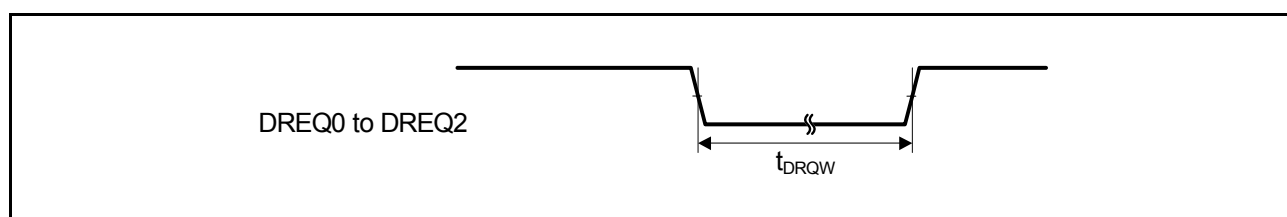

**Figure 2.37 DREQ Input Timing**

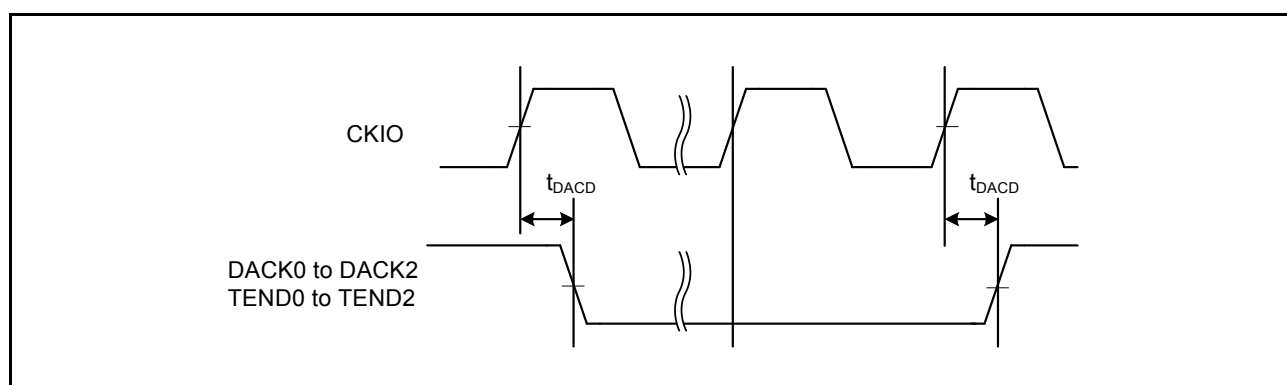

**Figure 2.38 DACK and TEND Output Timing**


## 2.4.5 On-Chip Peripheral Module Timing

### 2.4.5.1 I/O Port Timing

**Table 2.19 I/O Port Timing**

| Item     |                        | Symbol    | min | max | Unit*1      | Test Conditions |
|----------|------------------------|-----------|-----|-----|-------------|-----------------|
| I/O port | Input data pulse width | $t_{PRW}$ | 1.5 | —   | $t_{PBcyc}$ | Figure 2.39     |

Note 1.  $t_{PBcyc}$ : PCLKB cycle

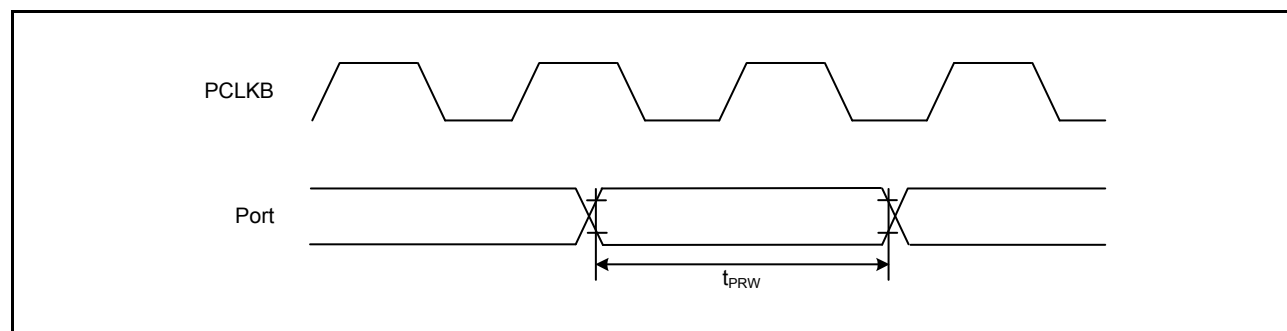

**Figure 2.39 I/O Port Input Timing**

## 2.4.5.2 TPUa Timing

Table 2.20 TPUa Timing

| Item |                                 | Symbol              | min         | max | Unit*1 | Test Conditions         |
|------|---------------------------------|---------------------|-------------|-----|--------|-------------------------|
| TPUa | Input capture input pulse width | Single-edge setting | $t_{TICW}$  | 1.5 | —      | $t_{PDcyc}$ Figure 2.40 |
|      |                                 | Both-edge setting   |             | 2.5 | —      |                         |
|      | Timer clock pulse width         | Single-edge         | $t_{TCKWH}$ | 1.5 | —      | $t_{PDcyc}$ Figure 2.41 |
|      |                                 | Both-edge setting   | $t_{TCKWL}$ | 2.5 | —      |                         |
|      |                                 | Phase counting mode |             | 2.5 | —      |                         |

Note 1.  $t_{PDcyc}$ : PCLKD cycle

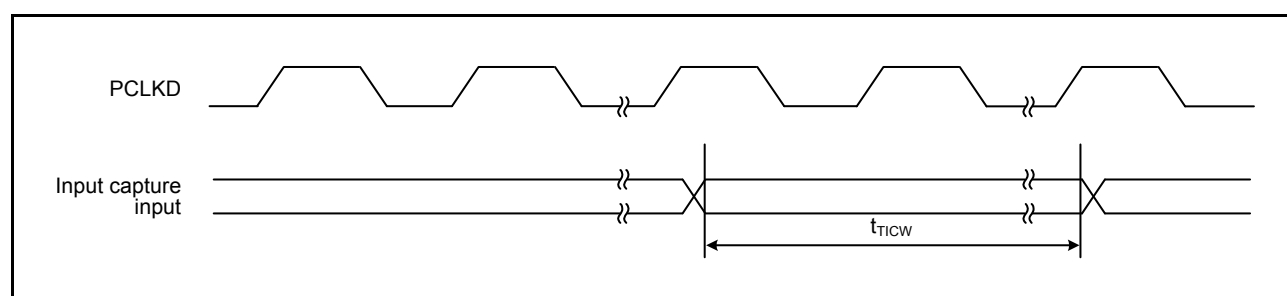


Figure 2.40 TPUa Input Capture Input Timing

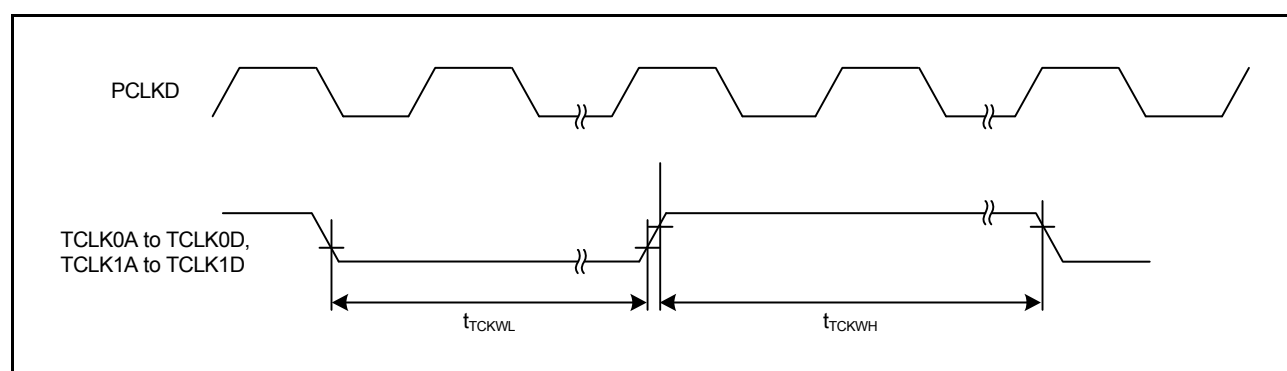



Figure 2.41 TPUa Clock Input Timing

## 2.4.5.3 CMTW Timing

**Table 2.21 CMTW Timing**

| Item |                                 | Symbol              | min                  | max | Unit*1 | Test Conditions                |
|------|---------------------------------|---------------------|----------------------|-----|--------|--------------------------------|
| CMTW | Input capture input pulse width | Single-edge setting | $t_{\text{CMTWICW}}$ | 1.5 | —      | $t_{\text{PDcyc}}$ Figure 2.42 |
|      |                                 | Both-edge setting   |                      | 2.5 | —      |                                |

Note 1.  $t_{\text{PDcyc}}$ : PCLKD cycle


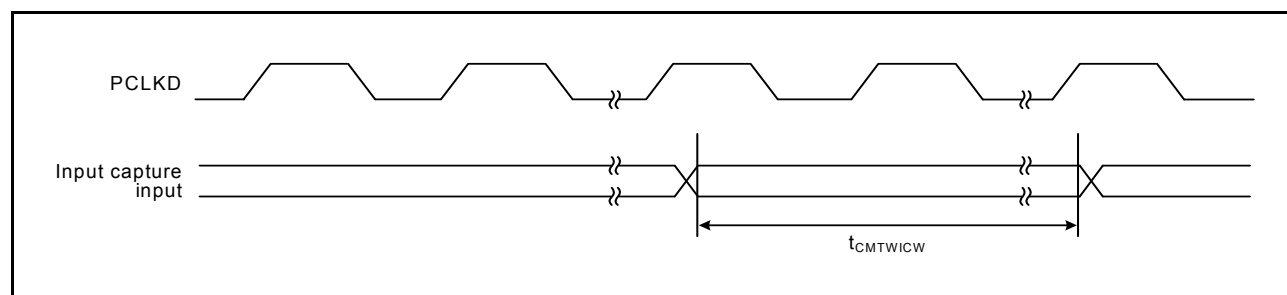
**Figure 2.42 CMTW Input Capture Input Timing**

## 2.4.5.4 MTU3a Timing

**Table 2.22 MTU3a Timing**

| Item  |                                 |                     | Symbol                         | min | max | Unit*1      | Test Conditions |
|-------|---------------------------------|---------------------|--------------------------------|-----|-----|-------------|-----------------|
| MTU3a | Input capture input pulse width | Single-edge setting | $t_{MTICW}$                    | 1.5 | —   | $t_{PCcyc}$ | Figure 2.43     |
|       |                                 | Both-edge setting   |                                | 2.5 | —   |             |                 |
|       | Timer clock pulse width         | Single-edge setting | $t_{MTCKWH}$ ,<br>$t_{MTCKWL}$ | 1.5 | —   | $t_{PCcyc}$ | Figure 2.44     |
|       |                                 | Both-edge setting   |                                | 2.5 | —   |             |                 |
|       |                                 | Phase counting mode |                                | 2.5 | —   |             |                 |

Note 1.  $t_{PCcyc}$ : PCLKC cycle

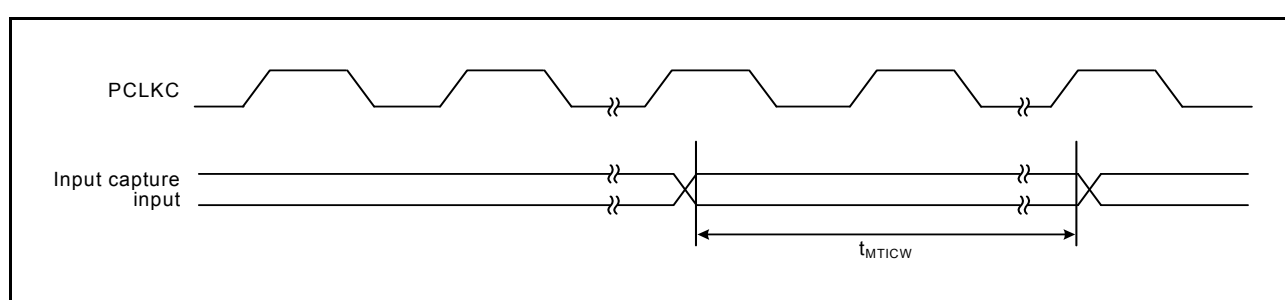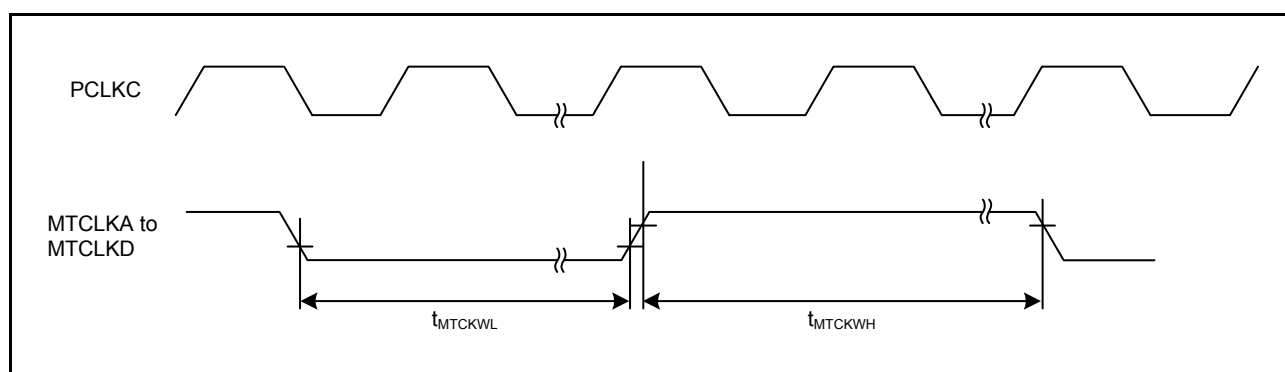
**Figure 2.43 MTU3a Input Capture Input Timing****Figure 2.44 MTU3a Clock Input Timing**

## 2.4.5.5 POE3 Timing

**Table 2.23 POE3 Timing**

| Item                         | Symbol     | min | max | Unit*1      | Test Conditions |
|------------------------------|------------|-----|-----|-------------|-----------------|
| POE3 POEn# input pulse width | $t_{POEW}$ | 1.5 | —   | $t_{PDcyc}$ | Figure 2.45     |

Note 1.  $t_{PDcyc}$ : PCLKD cycle

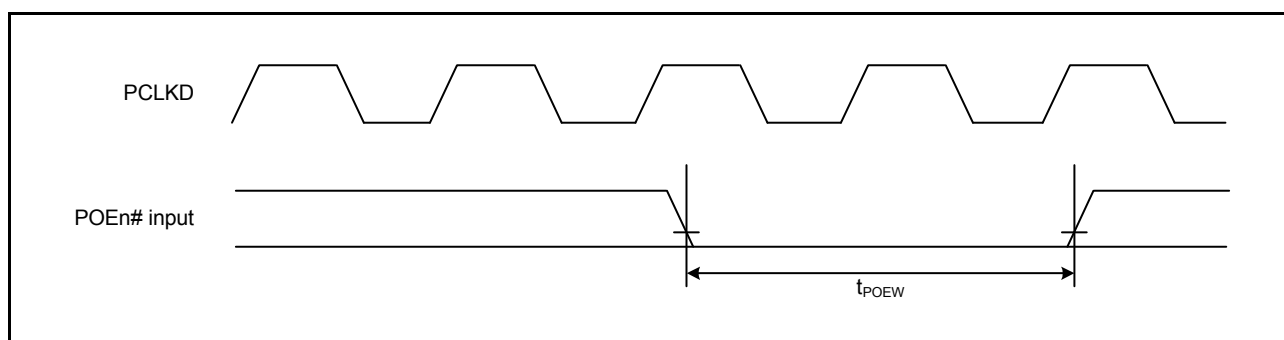**Figure 2.45 POEn# Input Pulse Timing**

## 2.4.5.6 GPTa Timing

Table 2.24 GPTa Timing

| Item |                                    |                     | Symbol      | min | max | Unit*1     | Test Conditions |
|------|------------------------------------|---------------------|-------------|-----|-----|------------|-----------------|
| GPTa | Input capture input pulse width    | Single-edge setting | $t_{GTICW}$ | 3   | —   | $t_{PCyc}$ | Figure 2.46     |
|      |                                    | Both-edge setting   |             | 5   | —   |            |                 |
|      | External trigger input pulse width | Single-edge setting | $T_{OTETW}$ | 1.5 | —   | $t_{PCyc}$ | Figure 2.47     |
|      |                                    | Both-edge setting   |             | 2.5 | —   |            |                 |

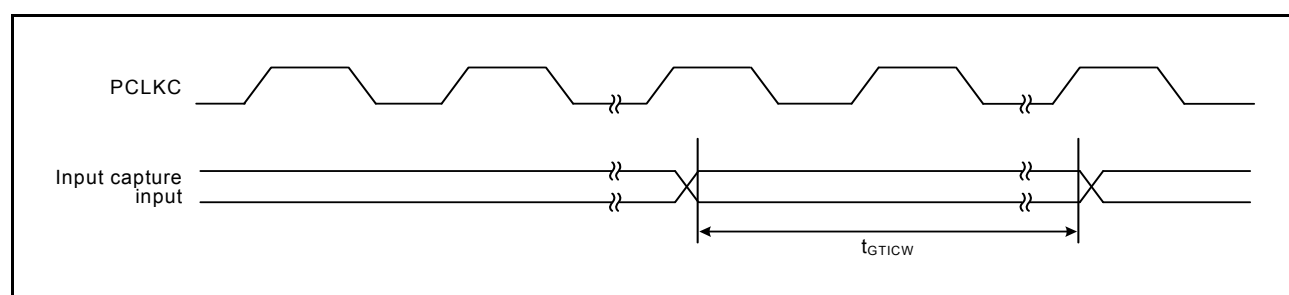
Note 1.  $t_{PCyc}$ : PCLKC cycle

Figure 2.46 GPTa Input Capture Input Timing

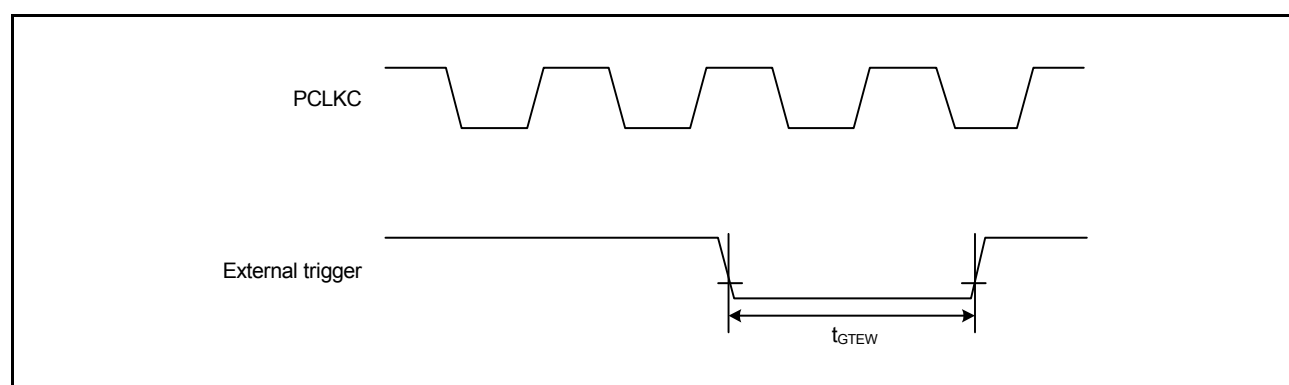




Figure 2.47 GPTa External Trigger Input Timing

## 2.4.5.7 A/D Converter Trigger Timing

**Table 2.25 A/D Converter Trigger Timing**

| Item          |                                         | Symbol | min        | max | Unit*1 | Test Conditions         |
|---------------|-----------------------------------------|--------|------------|-----|--------|-------------------------|
| A/D converter | A/D converter trigger input pulse width | ADTRG0 | $t_{TRGW}$ | 1.5 | —      | $t_{PFcyc}$ Figure 2.48 |
|               |                                         | ADTRG1 | $t_{TRGW}$ | 1.5 | —      | $t_{PGcyc}$ Figure 2.49 |

Note 1.  $t_{PFcyc}$ : PCLKF cycle,  $t_{PGcyc}$ : PCLKG cycle

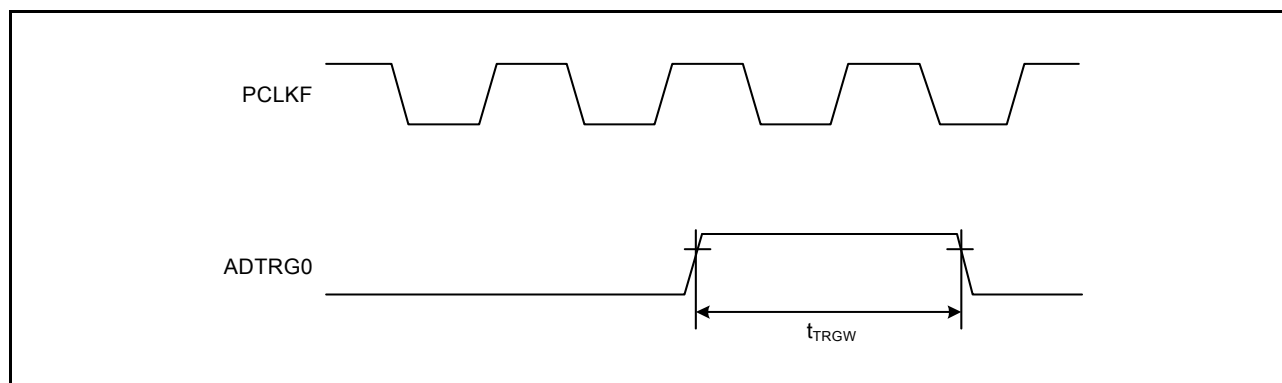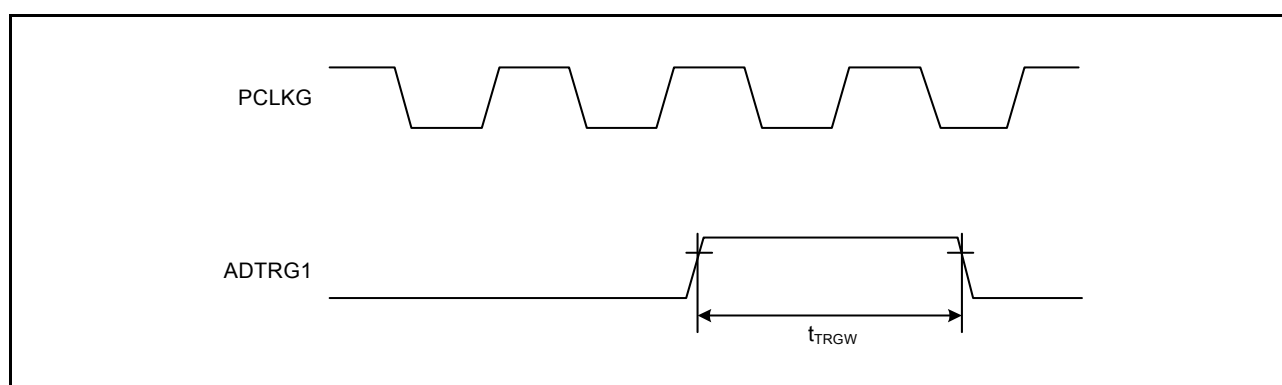**Figure 2.48 A/D Converter Trigger Input Timing (ADTRG0)****Figure 2.49 A/D Converter Trigger Input Timing (ADTRG1)**


## 2.4.5.8 SCIFA Timing

**Table 2.26 SCIFA Timing**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30 \text{ pF}$ 

| Item  |                           | Symbol            | min*1      | max*1                     | Unit*1                    | Test Conditions |
|-------|---------------------------|-------------------|------------|---------------------------|---------------------------|-----------------|
| SCIFA | Input clock cycle         | Asynchronous      | $t_{Scyc}$ | 4                         | —                         | Figure 2.50     |
|       |                           | Clock synchronous | 12         | —                         | $t_{SEcyc}$               |                 |
|       | Input clock pulse width   |                   | $t_{SCKW}$ | 0.4                       | 0.6                       | $t_{Scyc}$      |
|       | Input clock rising time   |                   | $t_{SCKr}$ | —                         | 5                         | ns              |
|       | Input clock falling time  |                   | $t_{SCKf}$ | —                         | 5                         | ns              |
|       | Output clock cycle        | Asynchronous*2    | $t_{Scyc}$ | 8                         | —                         | $t_{SEcyc}$     |
|       |                           | Clock synchronous | 4          | —                         | —                         |                 |
|       | Output clock pulse width  |                   | $t_{SCKW}$ | 0.4                       | 0.6                       | $t_{Scyc}$      |
|       | Output clock rising time  |                   | $t_{SCKr}$ | —                         | 9                         | ns              |
|       | Output clock falling time |                   | $t_{SCKf}$ | —                         | 9                         | ns              |
|       | Transmit data delay time  | Internal clock    | $t_{TXD}$  | — 10                      | 10                        | ns              |
|       |                           | External clock    |            | $3 \times t_{SEcyc}$      | $4 \times t_{SEcyc} + 20$ | Figure 2.51     |
|       | Receive data setup time   | Internal clock    | $t_{RXS}$  | $3 \times t_{SEcyc} + 20$ | —                         | ns              |
|       |                           | External clock    |            | $t_{SEcyc} + 10$          | —                         |                 |
|       | Receive data hold time    | Internal clock    | $t_{RXH}$  | $-3 \times t_{SEcyc}$     | —                         | ns              |
|       |                           | External clock    |            | $2 \times t_{SEcyc} + 10$ | —                         |                 |

Note 1.  $t_{SEcyc}$ : SERICLK cycle

Note 2. When the SEMR.ABCS0 bit = 1 and the SEMR.BGDM bit = 1

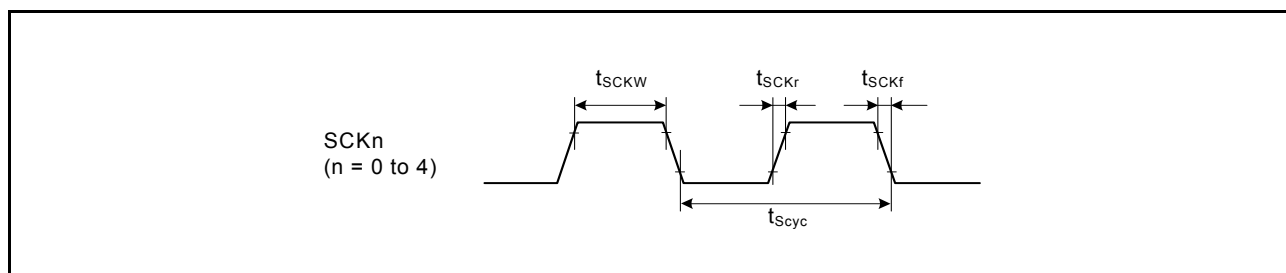**Figure 2.50 SCK Clock Input Timing**

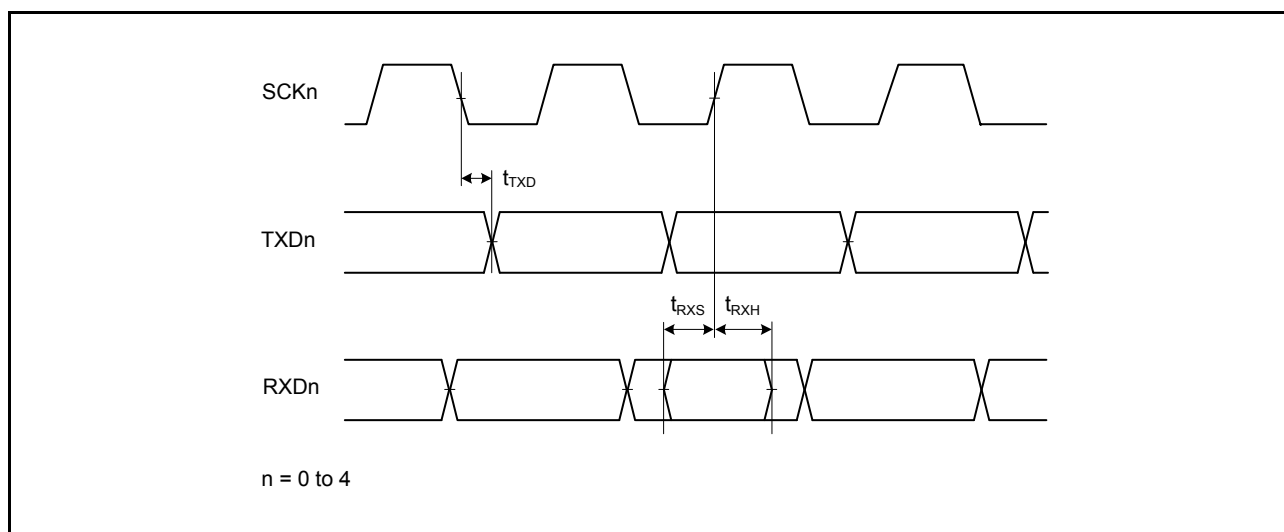


Figure 2.51 SCIFA Input/Output Timing/Clock Synchronous Mode

## 2.4.5.9 RSPIa Timing

**Table 2.27 RSPIa Timing**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30 \text{ pF}$ 

| Item  |                                    | Symbol*1 | Min*1                | Max*1                                         | Unit*1                                    | Test Conditions                        |
|-------|------------------------------------|----------|----------------------|-----------------------------------------------|-------------------------------------------|----------------------------------------|
| RSPIa | RSPCK clock cycle                  | Master   | $t_{SPCyc}$          | 4                                             | 4096                                      | $t_{SEcyc}$ Figure 2.52                |
|       |                                    | Slave    |                      | 8                                             | 4096                                      |                                        |
|       | RSPCK clock high level pulse width | Master   | $t_{SPCKWH}$         | $(t_{SPCyc} - t_{SPCKR} - t_{SPCKF}) / 2 - 3$ | —                                         | ns                                     |
|       |                                    | Slave    |                      | 0.4                                           | —                                         | $t_{SPCyc}$                            |
|       | RSPCK clock low level pulse width  | Master   | $t_{SPCKWL}$         | $(t_{SPCyc} - t_{SPCKR} - t_{SPCKF}) / 2 - 3$ | —                                         | ns                                     |
|       |                                    | Slave    |                      | 0.4                                           | —                                         | $t_{SPCyc}$                            |
|       | RSPCK clock rising/falling time    | Output   | $t_{SPCKr}$          | —                                             | 9                                         | ns                                     |
|       |                                    | Input    | $t_{SPCKf}$          | —                                             | 10                                        | ns                                     |
|       | Data input setup time              | Master   | $t_{SU}$             | 6                                             | —                                         | ns                                     |
|       |                                    | Slave    |                      | $8 - t_{SEcyc}$                               | —                                         | Figure 2.53 to Figure 2.56             |
|       | Data input hold time               | Master   | $t_H$                | $t_{SEcyc}$                                   | —                                         | ns                                     |
|       |                                    | Slave    |                      | $8 + 2 \times t_{SEcyc}$                      | —                                         |                                        |
|       | SSL setup time                     | Master   | $t_{LEAD}$           | $N \times t_{SPCyc} - 3^2$                    | $N \times t_{SPCyc} + 3^2$                | ns                                     |
|       |                                    | Slave    |                      | 4                                             | —                                         | $t_{SEcyc}$                            |
|       | SSL hold time                      | Master   | $t_{LAG}$            | $N \times t_{SPCyc} - 3^2$                    | $N \times t_{SPCyc} + 3^2$                | ns                                     |
|       |                                    | Slave    |                      | 4                                             | —                                         | $t_{SEcyc}$                            |
|       | Data output delay time             | Master   | $t_{OD}$             | —                                             | 6                                         | ns                                     |
|       |                                    | Slave    |                      | —                                             | $3 \times t_{SEcyc} + 20$                 |                                        |
|       | Data output hold time              | Master   | $t_{OH}$             | 0                                             | —                                         | ns                                     |
|       |                                    | Slave    |                      | 0                                             | —                                         |                                        |
|       | Continuous transmission delay      | Master   | $t_{TD}$             | $t_{SPCyc} + 2 \times t_{SEcyc}$              | $8 \times t_{SPCyc} + 2 \times t_{SEcyc}$ | ns                                     |
|       |                                    | Slave    |                      | $4 \times t_{SEcyc}$                          | —                                         |                                        |
|       | MOSI, MISO rising/falling time     | Output   | $t_{Dr}, t_{Df}$     | —                                             | 9                                         | ns                                     |
|       |                                    | Input    |                      | —                                             | 10                                        | ns                                     |
|       | SSL rising/falling time            | Output   | $t_{SSLr}, t_{SSLf}$ | —                                             | 9                                         | ns                                     |
|       |                                    | Input    |                      | —                                             | 10                                        | ns                                     |
|       | Slave access time                  |          | $t_{SA}$             | —                                             | 4                                         | $t_{SEcyc}$ Figure 2.55 to Figure 2.56 |
|       | Slave output release time          |          | $t_{REL}$            | —                                             | 3                                         | $t_{SEcyc}$                            |

Note 1.  $t_{SEcyc}$ : SERICLK cycleNote 2.  $N = \text{SSLND set value} + 1$  (1 to 8)

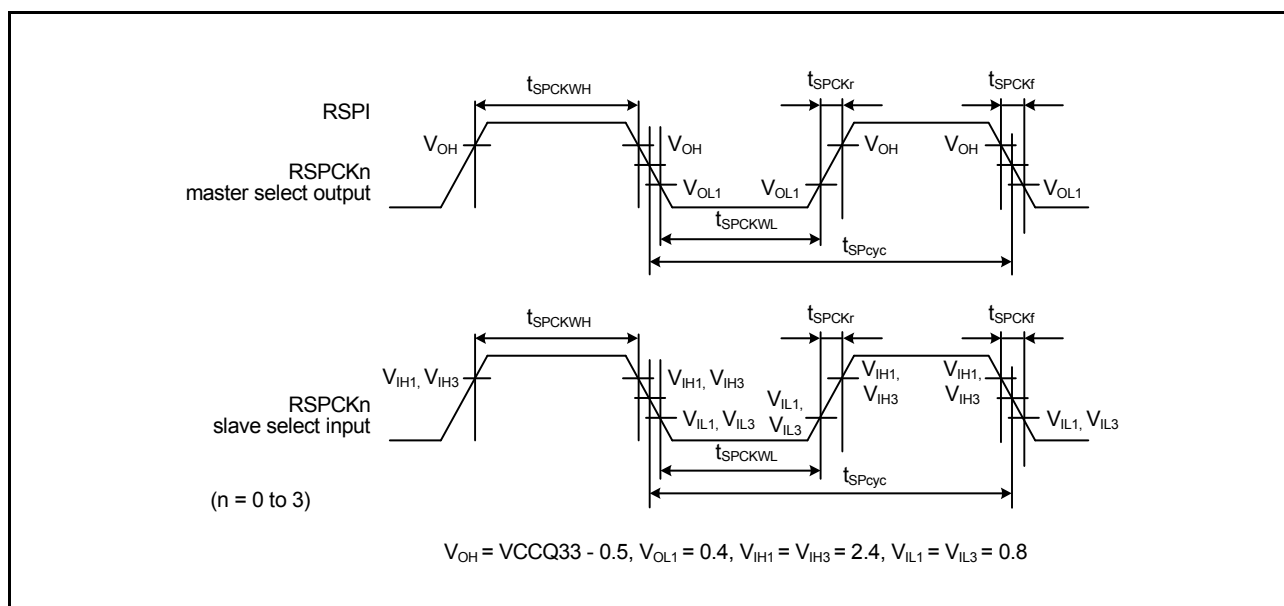


Figure 2.52 RSPIa Clock Timing

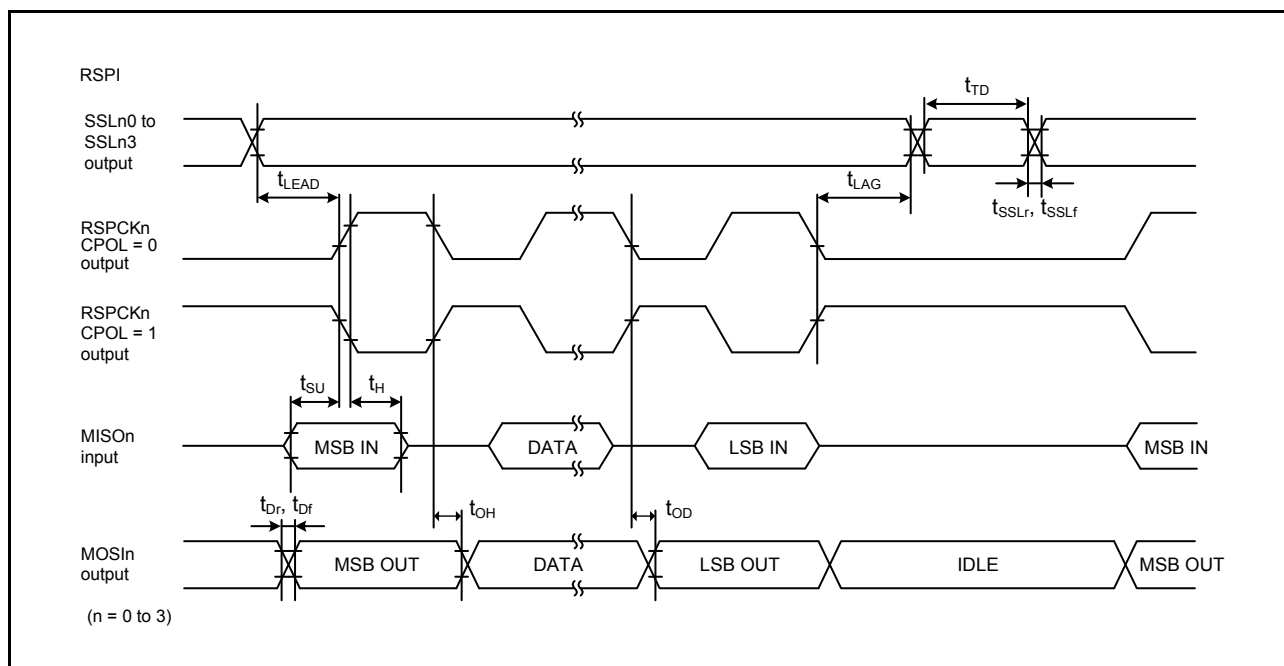


Figure 2.53 RSPIa Timing (Master, CPHA = 0)

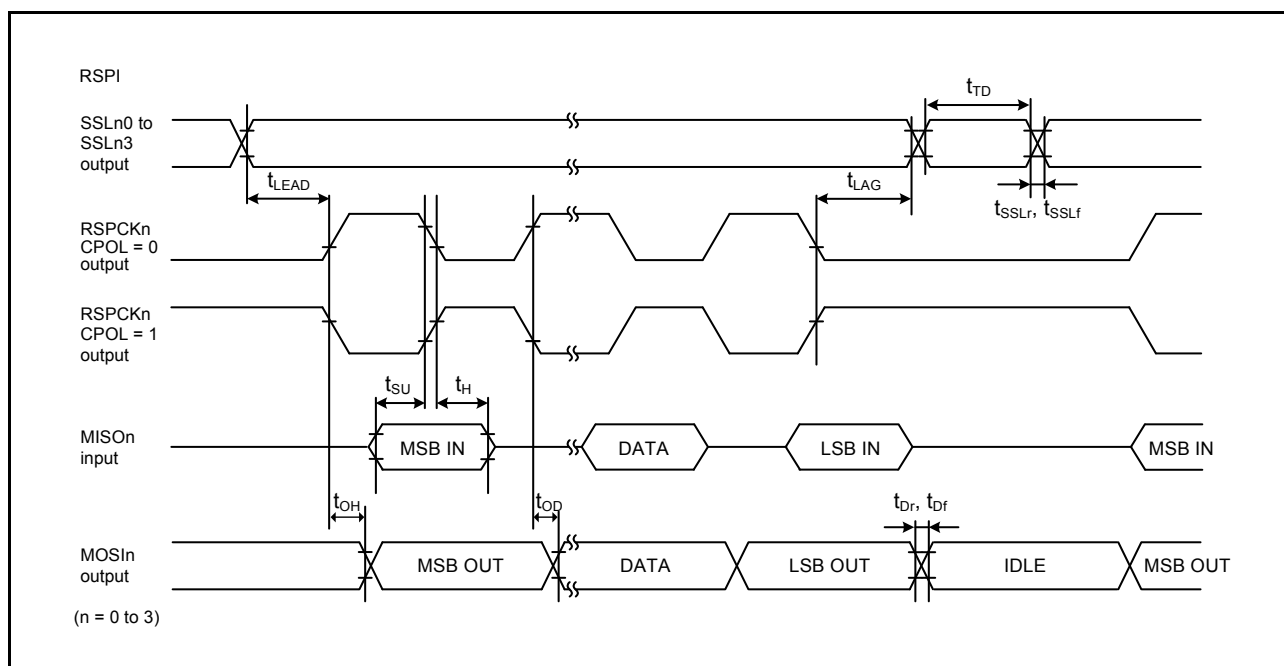


Figure 2.54 RSPIa Timing (Master, CPHA = 1)


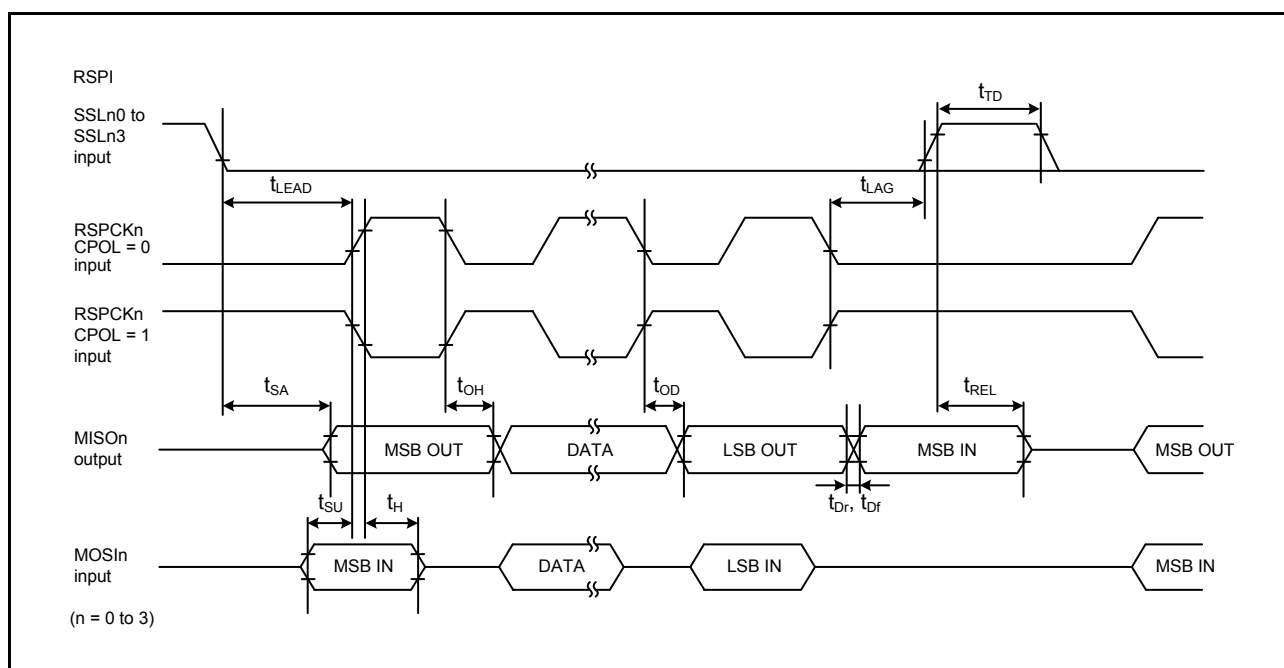


Figure 2.55 RSPI Timing (Slave, CPHA = 0)

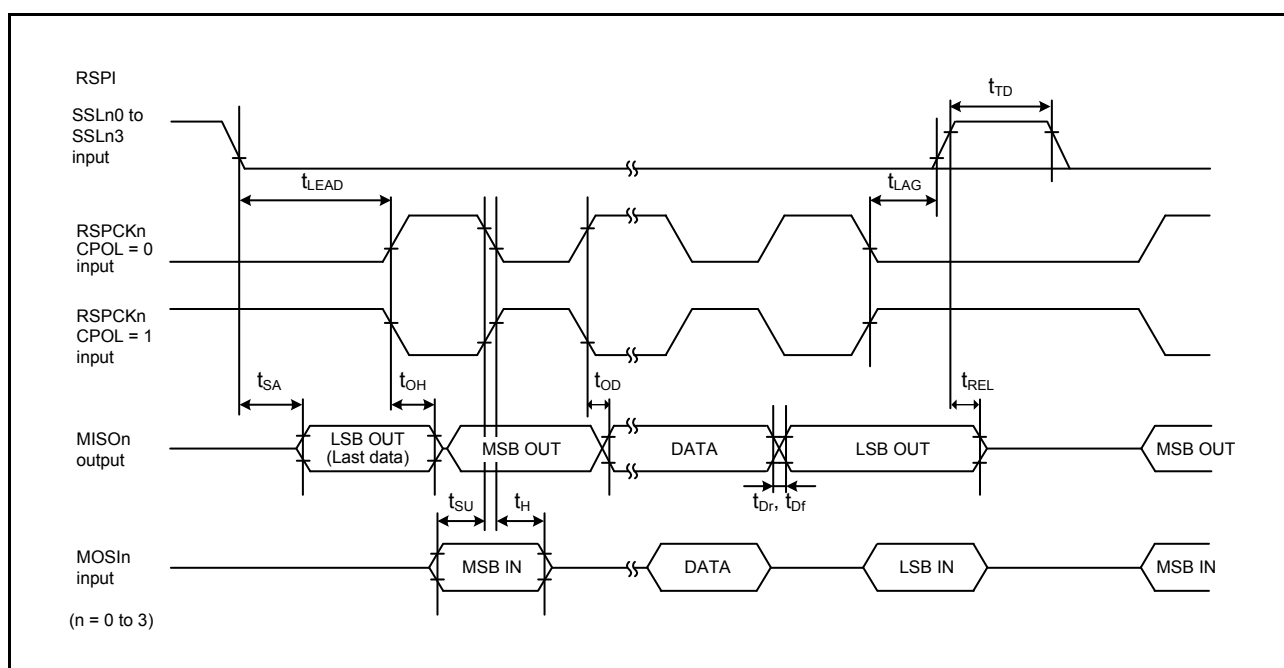


**Figure 2.56** RSPI Timing (Slave, CPHA = 1)

## 2.4.5.10 SPIBSC Timing

**Table 2.28 SPIBSC Timing**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30$  pF

| Item   |                                | Symbol              | min                         | max                           | Unit*1              | Test Conditions             |
|--------|--------------------------------|---------------------|-----------------------------|-------------------------------|---------------------|-----------------------------|
| SPIBSC | SPBCLK clock cycle             | t <sub>SPBcyc</sub> | 2                           | 4080                          | t <sub>PACyc</sub>  | Figure 2.57                 |
|        | SPBCLK high level pulse width  | t <sub>SPBWH</sub>  | 0.45                        | 0.55                          | t <sub>SPBcyc</sub> |                             |
|        | SPBCLK low level pulse width   | t <sub>SPBWL</sub>  | 0.45                        | 0.55                          | t <sub>SPBcyc</sub> |                             |
|        | Data input setup time          | t <sub>SU</sub>     | 3.5                         | —                             | ns                  | Figure 2.58,<br>Figure 2.59 |
|        | Data input hold time           | t <sub>H</sub>      | 0.5                         | —                             | ns                  |                             |
|        | SSL setup time                 | t <sub>LEAD</sub>   | 1 × t <sub>SPBcyc</sub> − 3 | 8 × t <sub>SPBcyc</sub>       | ns                  |                             |
|        | SSL hold time                  | t <sub>LAG</sub>    | 1.5 × t <sub>SPBcyc</sub>   | 8.5 × t <sub>SPBcyc</sub> + 3 | ns                  |                             |
|        | Continuous transfer delay time | t <sub>TD</sub>     | 1                           | 8                             | t <sub>SPBcyc</sub> |                             |
|        | Data output delay time         | t <sub>OD</sub>     | —                           | 3.6                           | ns                  |                             |
|        | Data output hold time          | t <sub>OH</sub>     | − 1                         | —                             | ns                  |                             |
|        | Data output buffer on time     | t <sub>BON</sub>    | —                           | 3.6                           | ns                  | Figure 2.62,<br>Figure 2.63 |
|        | Data output buffer off time    | t <sub>BOFF</sub>   | − 7                         | 0                             | ns                  |                             |

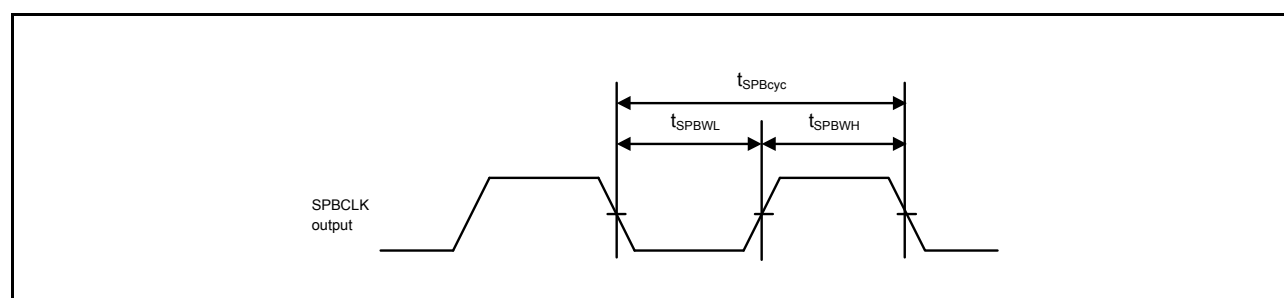Note 1.  $t_{PAcyc}$ : PCLKA cycle**Figure 2.57 SPIBSC Clock Timing**

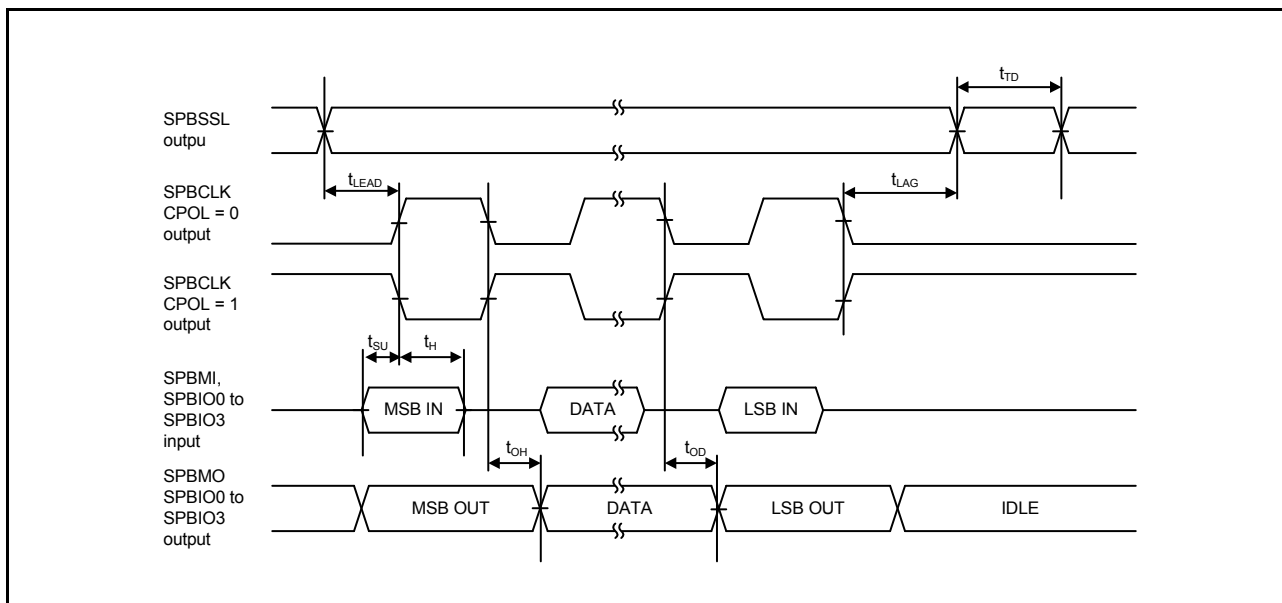


Figure 2.58 SPIBSC Transmit/Receive Timing (CPHAT = 0, CPHAR = 0)

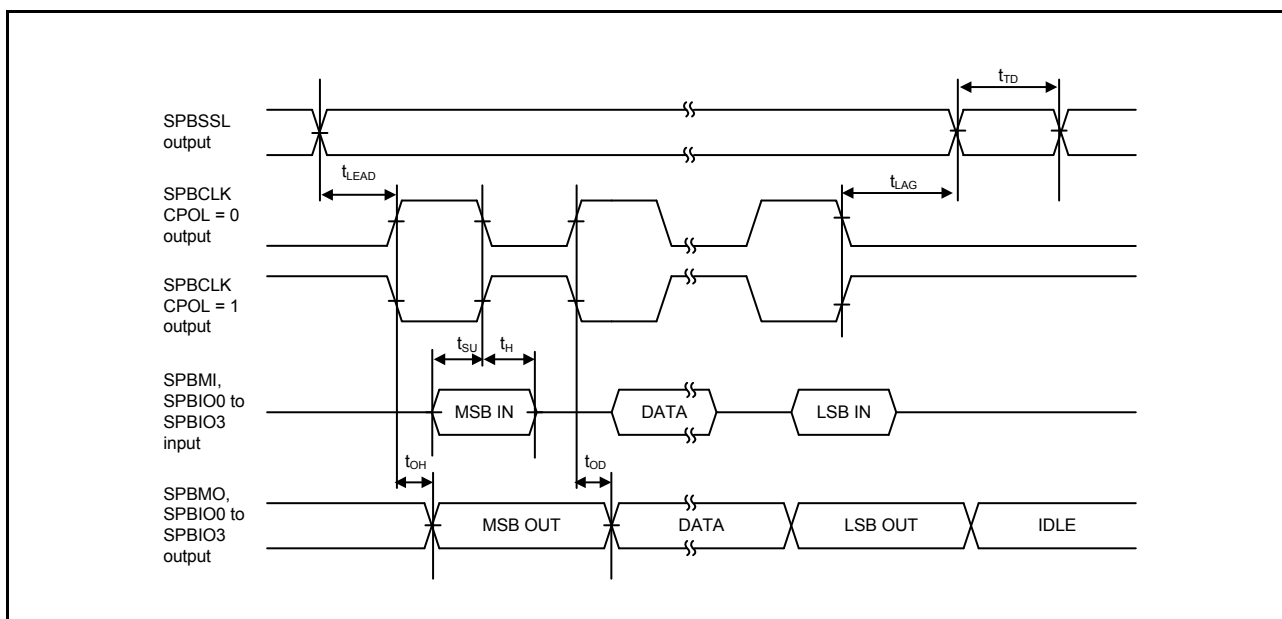


Figure 2.59 SPIBSC Transmit/Receive Timing (CPHAT = 1, CPHAR = 1)

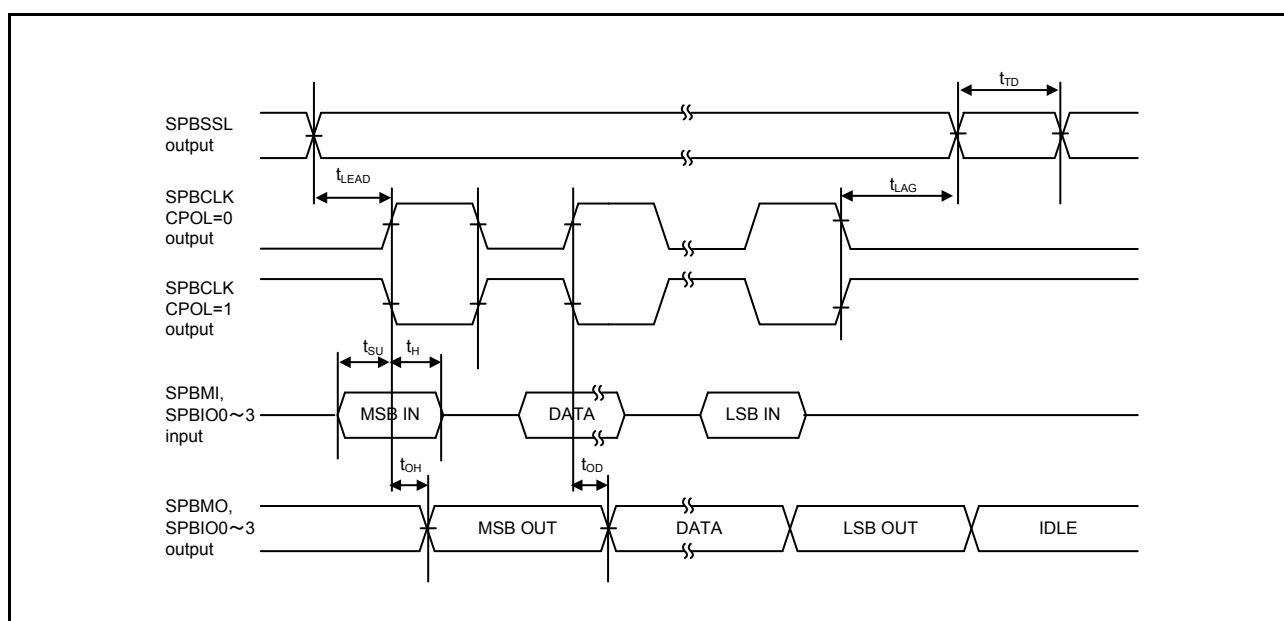


Figure 2.60 SPIBSC Transmit/Receive Timing (CPHAT = 0, CPHAR = 1)

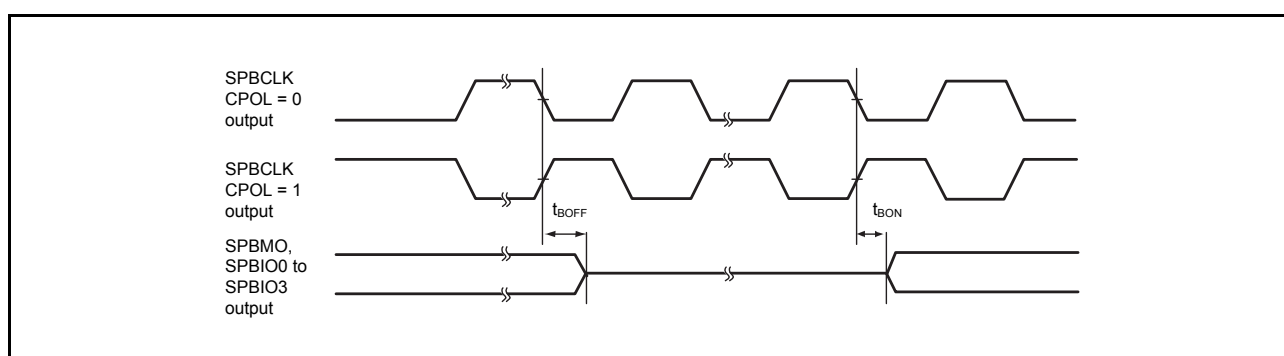


Figure 2.61 SPIBSC Buffer On/Off Timing (CPHAT = 0, CPHAR = 0)

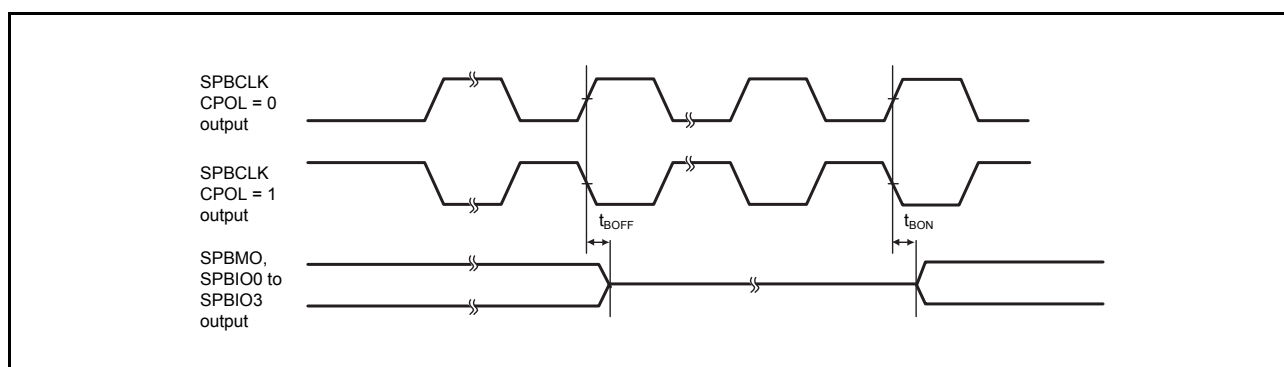


Figure 2.62 SPIBSC Buffer On/Off Timing (CPHAT = 1, CPHAR = 1)

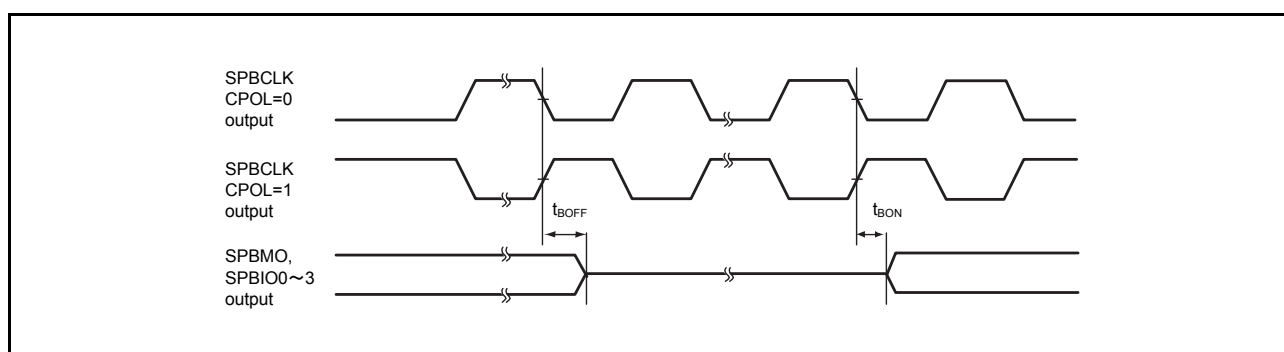


Figure 2.63 SPIBSC Buffer On/Off Timing (CPHAT = 0, CPHAR = 1)

## 2.4.5.11 IICa Timing

**Table 2.29 IICa Timing**Output load conditions:  $V_{OL2} = 0.4\text{ V}$ ,  $I_{OL2} = 3\text{ mA}$ 

| Item                    |                                         | symbol            | min*2                              | max*2                      | Unit*1 | Test Conditions |
|-------------------------|-----------------------------------------|-------------------|------------------------------------|----------------------------|--------|-----------------|
| IICa<br>(Standard-mode) | SCL input cycle time                    | t <sub>SCL</sub>  | 6(12) × t <sub>IICcyc</sub> + 1300 | —                          | ns     | Figure 2.64     |
|                         | SCL input high pulse width              | t <sub>SCLH</sub> | 3(6) × t <sub>IICcyc</sub> + 300   | —                          | ns     |                 |
|                         | SCL input low pulse width               | t <sub>SCLL</sub> | 3(6) × t <sub>IICcyc</sub> + 300   | —                          | ns     |                 |
|                         | SCL, SDA input rising time              | t <sub>sr</sub>   | —                                  | 1000                       | ns     |                 |
|                         | SCL, SDA input falling time             | t <sub>sf</sub>   | —                                  | 300                        | ns     |                 |
|                         | SCL, SDA input spike pulse removal time | t <sub>SP</sub>   | 0                                  | 1(4) × t <sub>IICcyc</sub> | ns     |                 |
|                         | SDA input bus free time                 | t <sub>BUF</sub>  | 3(6) × t <sub>IICcyc</sub> + 300   | —                          | ns     |                 |
|                         | Start condition input hold time         | t <sub>STAH</sub> | t <sub>IICcyc</sub> + 300          | —                          | ns     |                 |
|                         | Restart condition input setup time      | t <sub>STAS</sub> | 1000                               | —                          | ns     |                 |
|                         | Stop condition input setup time         | t <sub>STOS</sub> | 1000                               | —                          | ns     |                 |
|                         | Data input setup time                   | t <sub>SDAS</sub> | t <sub>IICcyc</sub> + 50           | —                          | ns     |                 |
|                         | Data input hold time                    | t <sub>SDAH</sub> | 0                                  | —                          | ns     |                 |
|                         | SCL, SDA capacitive load                | C <sub>b</sub>    | —                                  | 400                        | pF     |                 |
| IICa<br>(Fast-mode)     | SCL input cycle time                    | t <sub>SCL</sub>  | 6(12) × t <sub>IICcyc</sub> + 600  | —                          | ns     |                 |
|                         | SCL input high pulse width              | t <sub>SCLH</sub> | 3(6) × t <sub>IICcyc</sub> + 300   | —                          | ns     |                 |
|                         | SCL input low pulse width               | t <sub>SCLL</sub> | 3(6) × t <sub>IICcyc</sub> + 300   | —                          | ns     |                 |
|                         | SCL, SDA input rising time              | t <sub>sr</sub>   | —*4                                | 300                        | ns     |                 |
|                         | SCL, SDA input falling time             | t <sub>sf</sub>   | —*4                                | 300                        | ns     |                 |
|                         | SCL, SDA input spike pulse removal time | t <sub>SP</sub>   | 0                                  | 1(4) × t <sub>IICcyc</sub> | ns     |                 |
|                         | SDA input bus free time                 | t <sub>BUF</sub>  | 3(6) × t <sub>IICcyc</sub> + 300   | —                          | ns     |                 |
|                         | Start condition input hold time         | t <sub>STAH</sub> | t <sub>IICcyc</sub> + 300          | —                          | ns     |                 |
|                         | Restart condition input setup time      | t <sub>STAS</sub> | 300                                | —                          | ns     |                 |
|                         | Stop condition input setup time         | t <sub>STOS</sub> | 300                                | —                          | ns     |                 |
|                         | Data input setup time                   | t <sub>SDAS</sub> | t <sub>IICcyc</sub> + 50           | —                          | ns     |                 |
|                         | Data input hold time                    | t <sub>SDAH</sub> | 0                                  | —                          | ns     |                 |
|                         | SCL, SDA capacitive load*3              | C <sub>b</sub>    | —                                  | 400                        | pF     |                 |

Note 1.  $t_{IICcyc}$ : IIC internal reference clock (IIC $\phi$ ) cycle

Note 2. The value out of parentheses is applicable when the value of the ICMR3.NF[1:0] bits is 00b while the digital filter is enabled by the setting ICFER.NFE = 1. The value within parentheses is applicable when the value of the ICMR3.NF[1:0] bits is 11b while the digital filter is enabled by the setting ICFER.NFE = 1.

Note 3.  $C_b$  is the total capacitance of the bus lines.Note 4. The minimum values are not specified for  $t_{rs}$  and  $t_{st}$  in Fast-mode.

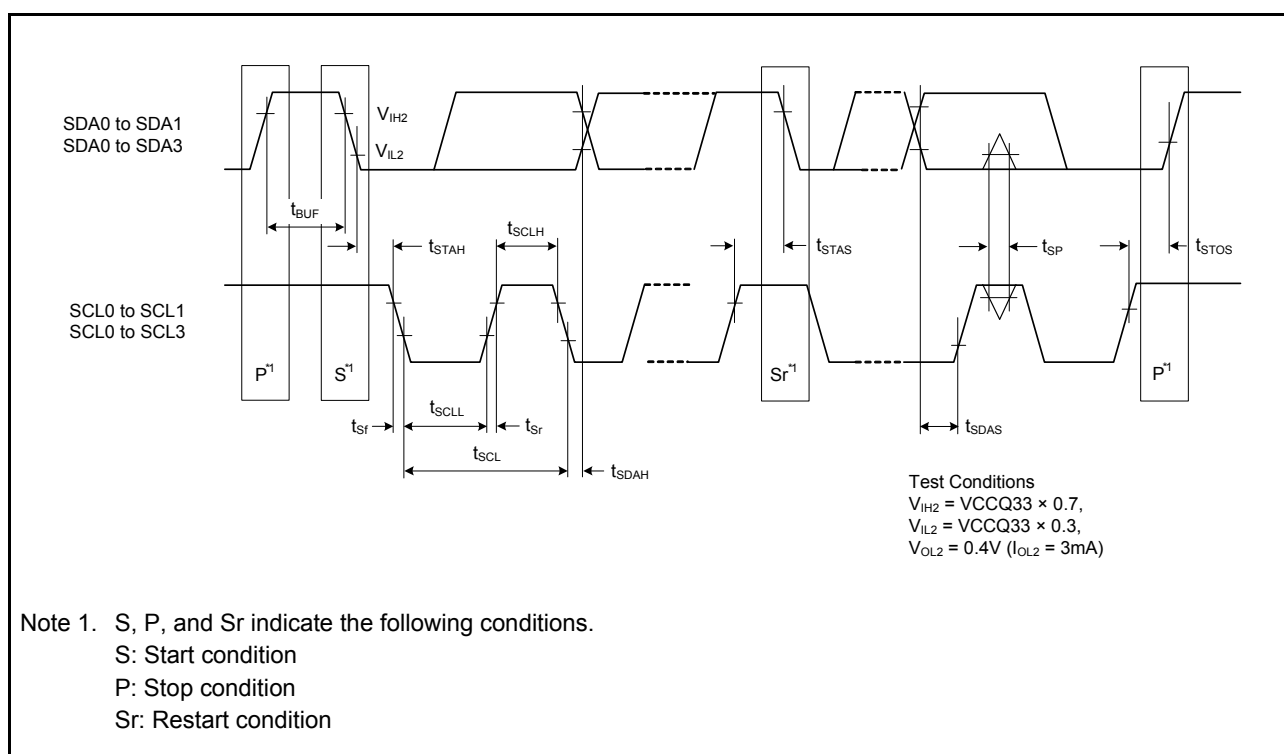
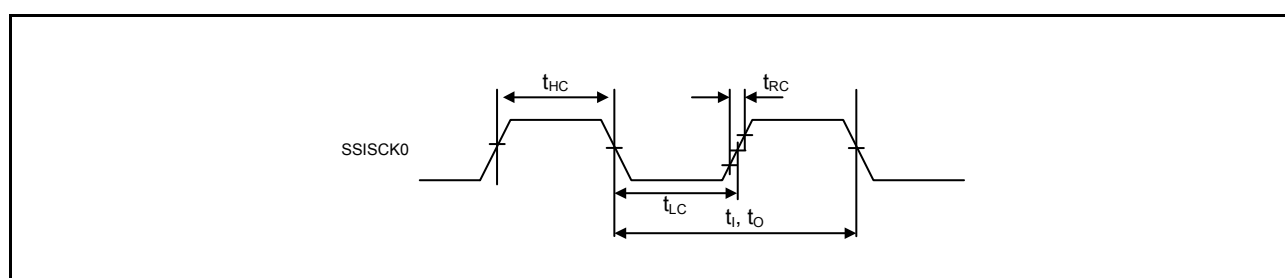
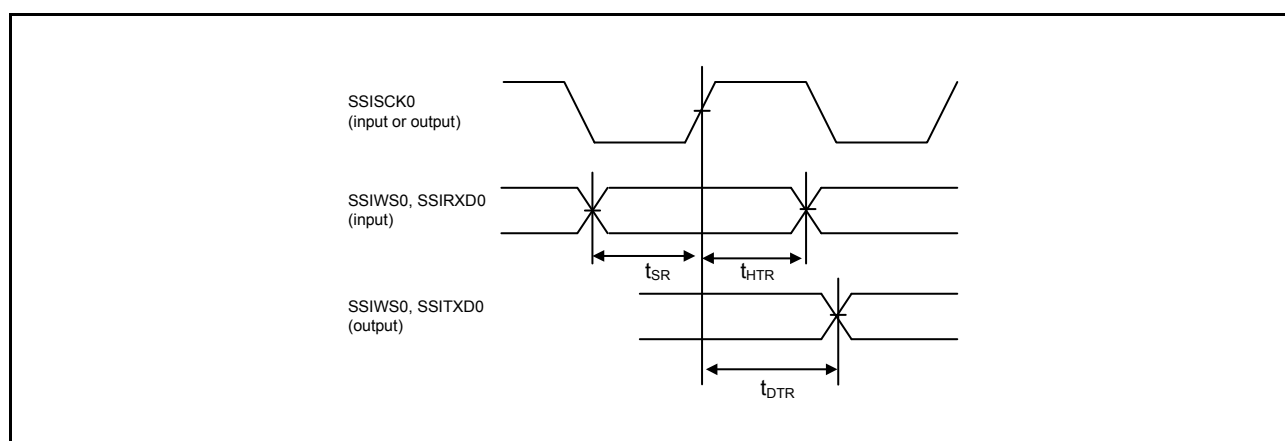


Figure 2.64 IICa Bus Interface Input/Output Timing

## 2.4.5.12 Serial Sound Interface Timing

**Table 2.30 Serial Sound Interface Timing**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30$  pF

| Item | Symbol                              | Min.        | Max. | Unit  | Test Conditions |
|------|-------------------------------------|-------------|------|-------|-----------------|
| SSI  | AUDIO_CLK input frequency           | $t_{AUDIO}$ | 1    | 50    | MHz             |
|      | Output clock cycle                  | $t_O$       | 150  | 64000 | ns              |
|      | Input clock cycle                   | $t_I$       | 150  | 64000 | ns              |
|      | Clock high level                    | $t_{HC}$    | 60   | —     | ns              |
|      | Clock low level                     | $t_{LC}$    | 60   | —     | ns              |
|      | Clock rising time                   | $t_{RC}$    | —    | 25    | ns              |
|      | Data delay time                     | $t_{DTR}$   | —5   | 25    | ns              |
|      | Setup time                          | $t_{SR}$    | 25   | —     | ns              |
|      | Hold time                           | $t_{HTR}$   | 25   | —     | ns              |
|      | WS change edge SSITXD0 output delay | $T_{DTRW}$  | —    | 25    | ns              |

**Figure 2.65 Clock Input/Output Timing****Figure 2.66 Transmit/Receive Timing (SSISCK0 Rising Synchronous)**

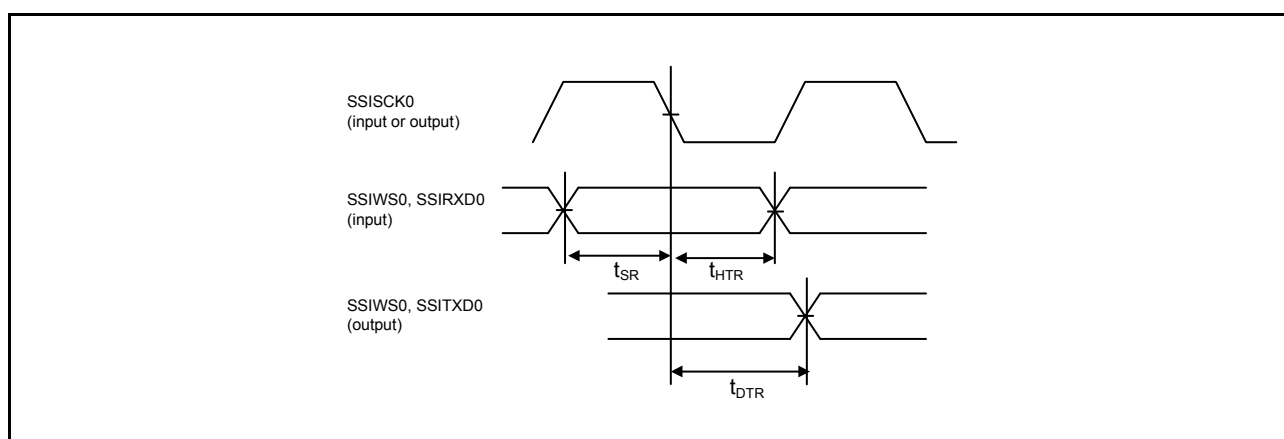


Figure 2.67 Transmit/Receive Timing (SSISCK0 Falling Synchronous)

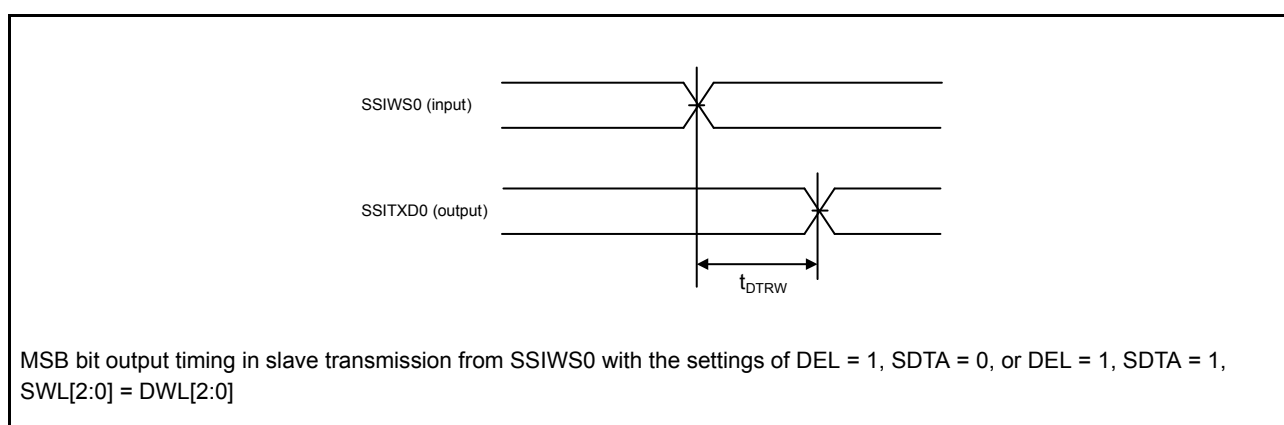



Figure 2.68 SSITXD0 Output Delay from SSIWS0 Change Edge

## 2.4.5.13 CAN Interface Timing

**Table 2.31** CAN Interface Timing

| Item                | Symbol            | min | max | Unit | Test Conditions |
|---------------------|-------------------|-----|-----|------|-----------------|
| Internal delay time | t <sub>node</sub> | —   | 100 | ns   | Figure 2.69     |
| Transmission rate   |                   | —   | 1   | Mbps |                 |

Internal delay time (t<sub>node</sub>) = Internal transmission delay time (t<sub>output</sub>) + Internal reception delay time (t<sub>input</sub>)

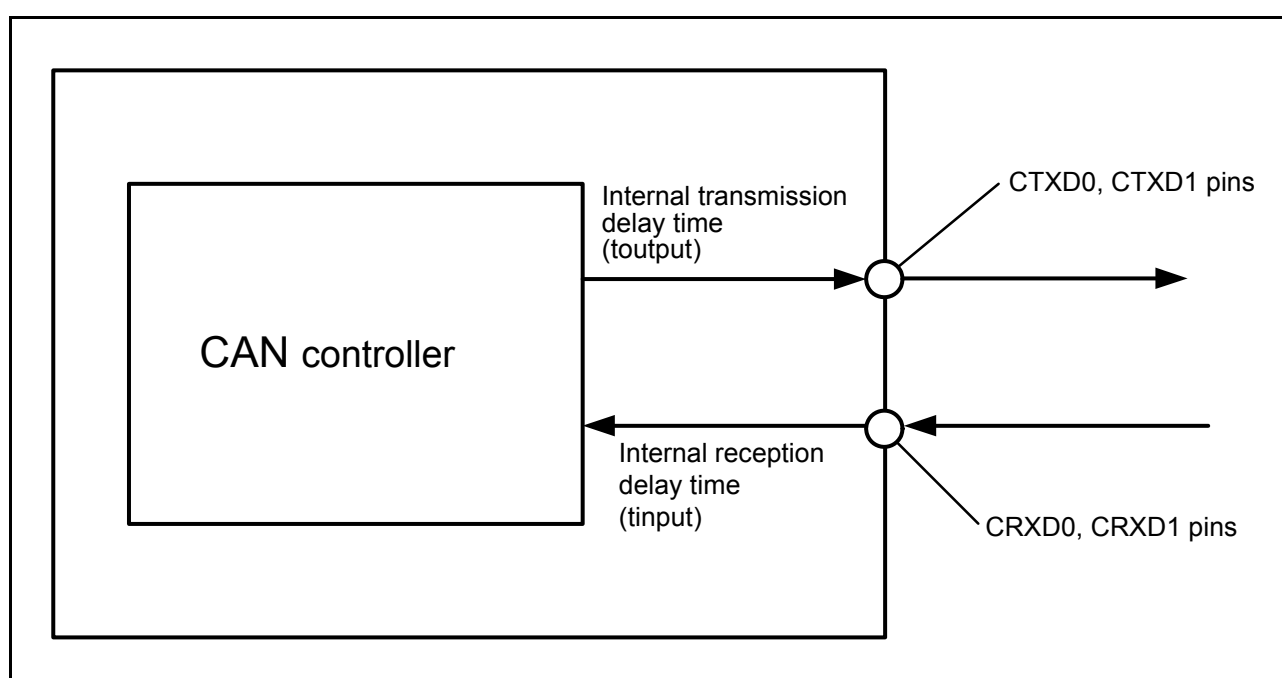**Figure 2.69** CAN Interface Conditions

## 2.4.5.14 ETHERC Timing


**Table 2.32 ETHERC Timing**

Output load conditions:  $V_{OH} = 2.0\text{ V}$ ,  $V_{OL1} = 0.8\text{ V}$ ,  $C = 25\text{ pF}$  (RMII)  
 $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30\text{ pF}$  (MII)

| Item          | Symbol                                   | min         | max | Unit | Test Conditions |
|---------------|------------------------------------------|-------------|-----|------|-----------------|
| ETHERC (RMII) | CLKOUT25Mn cycle time                    | $T_{ck}$    | 20  | —    | ns              |
|               | ETHn_Txxx*1 output delay time            | $T_{co}$    | 2   | 16   | ns              |
|               | ETHn_Rxxx*2 setup time                   | $T_{su}$    | 4   | —    | ns              |
|               | ETHn_Rxxx*2 hold time                    | $T_{hd}$    | 2   | —    | ns              |
|               | ETHn_xxxx*1, *2 rising/falling time      | $T_r, T_f$  | 0.5 | 5    | ns              |
| ETHERC (MII)  | ETHn_TXC cycle time                      | $t_{Tcyc}$  | 40  | —    | ns              |
|               | ETHn_TXEN output delay time              | $t_{TENd}$  | 0   | 25   | ns              |
|               | ETHn_TXD0 to ETHn_TXD3 output delay time | $t_{MTDd}$  | 0   | 25   | ns              |
|               | ETHn_TXER output delay time              | $t_{TERd}$  | —   | 25   | ns              |
|               | ETHn_RXC cycle time                      | $t_{TRcyc}$ | 40  | —    | ns              |
|               | ETHn_RXDV setup time                     | $t_{RDVs}$  | 10  | —    | ns              |
|               | ETHn_RXDV hold time                      | $t_{RDVh}$  | 10  | —    | ns              |
|               | ETHn_RXD0 to ETHn_RXD3 setup time        | $t_{MRDs}$  | 10  | —    | ns              |
|               | ETHn_RXD0 to ETHn_RXD3 hold time         | $t_{MRDh}$  | 10  | —    | ns              |
|               | ETHn_RXER setup time                     | $t_{RErs}$  | 10  | —    | ns              |
|               | ETHn_RXER hold time                      | $t_{RErh}$  | 10  | —    | ns              |
|               |                                          |             |     |      | Figure 2.77     |

Note 1. ETHn\_TXEN, ETHn\_TXD1, ETHn\_TXD0

Note 2. ETHn\_RXDV, ETHn\_RXD1, ETHn\_RXD0, ETHn\_RXER

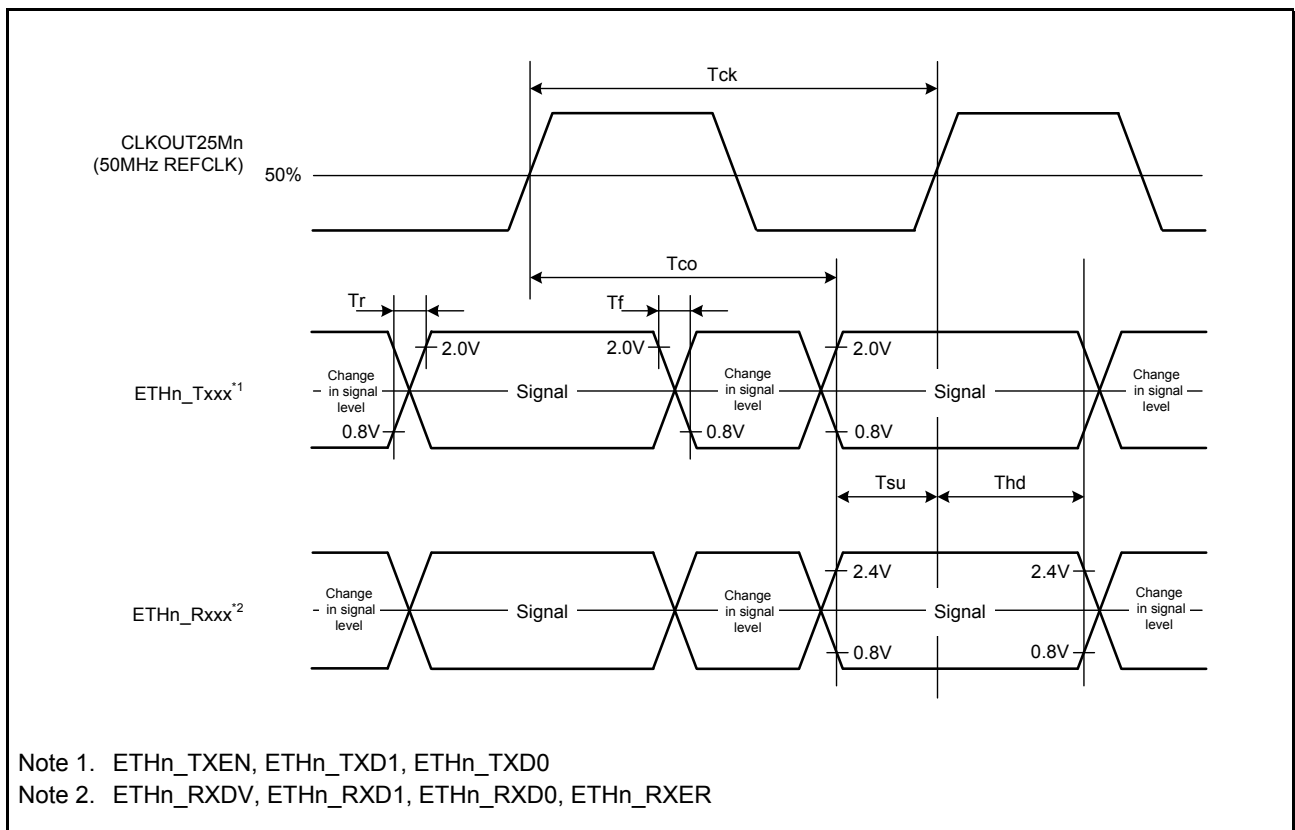**Figure 2.70 Timing with the CLKOUT25Mn and RMII Signals**

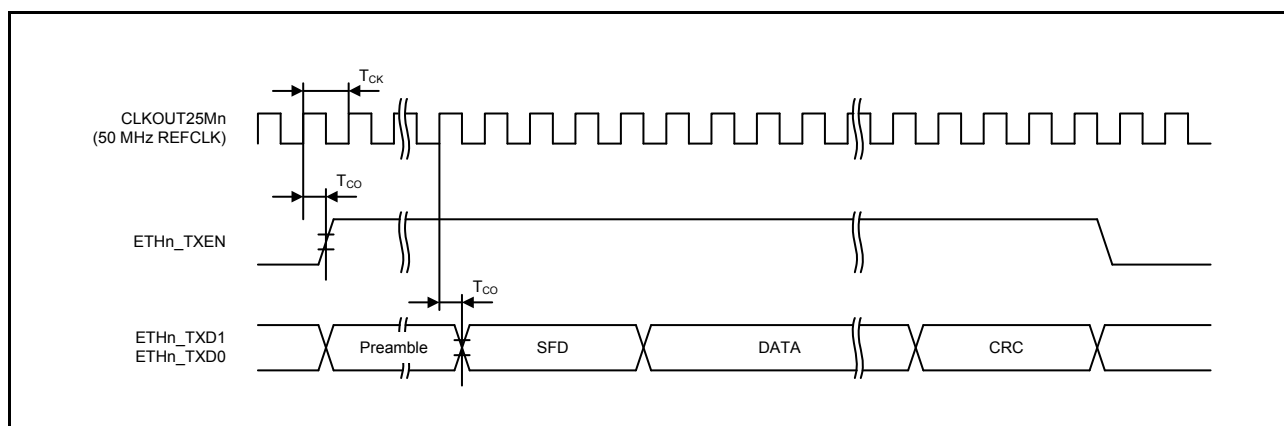


Figure 2.71 RMII Transmission Timing

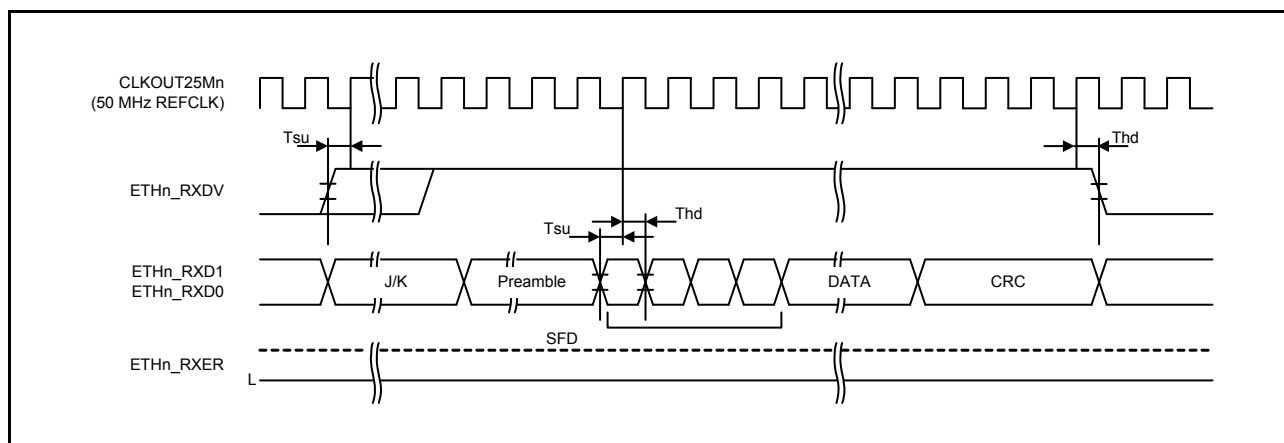


Figure 2.72 RMII Reception Timing (Normal Operation)

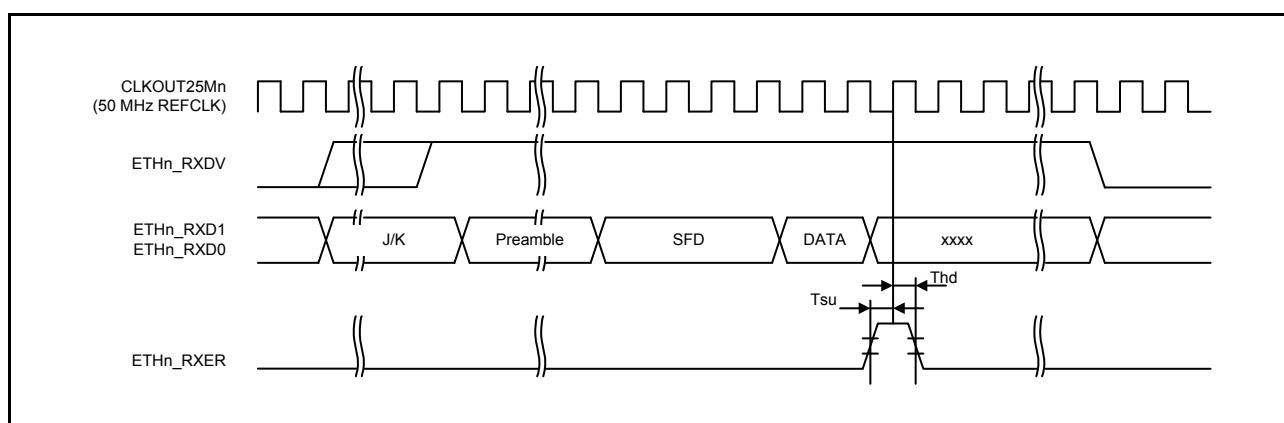


Figure 2.73 RMII Reception Timing (Error Occurrence)

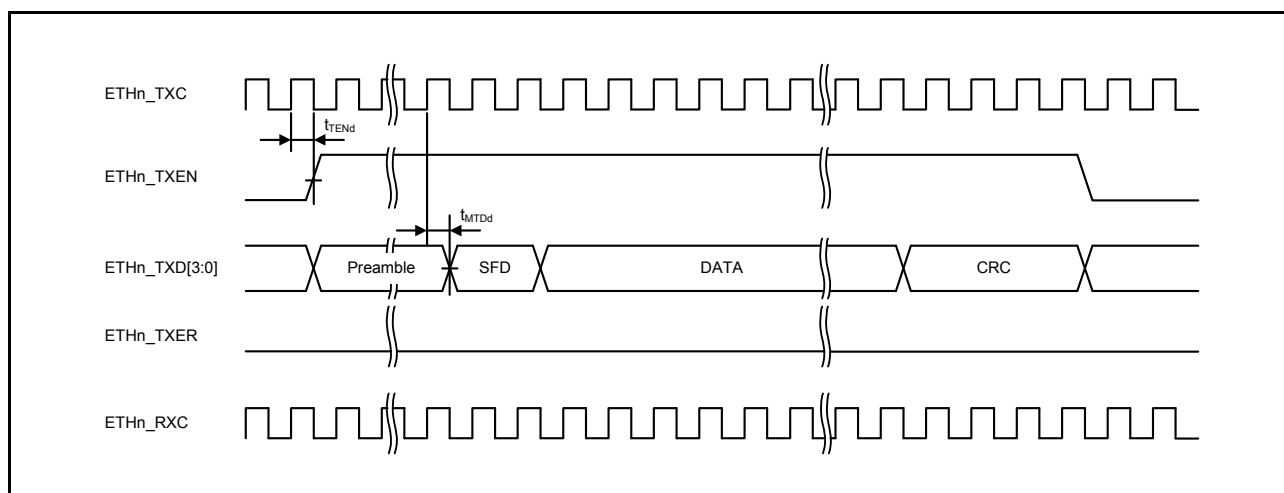


Figure 2.74 MII Transmission Timing

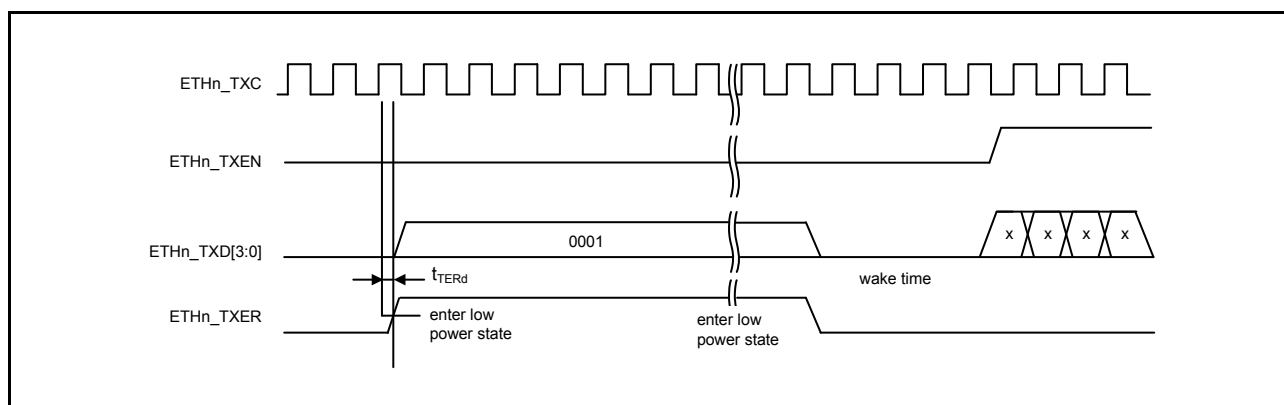


Figure 2.75 MII Transmission Timing


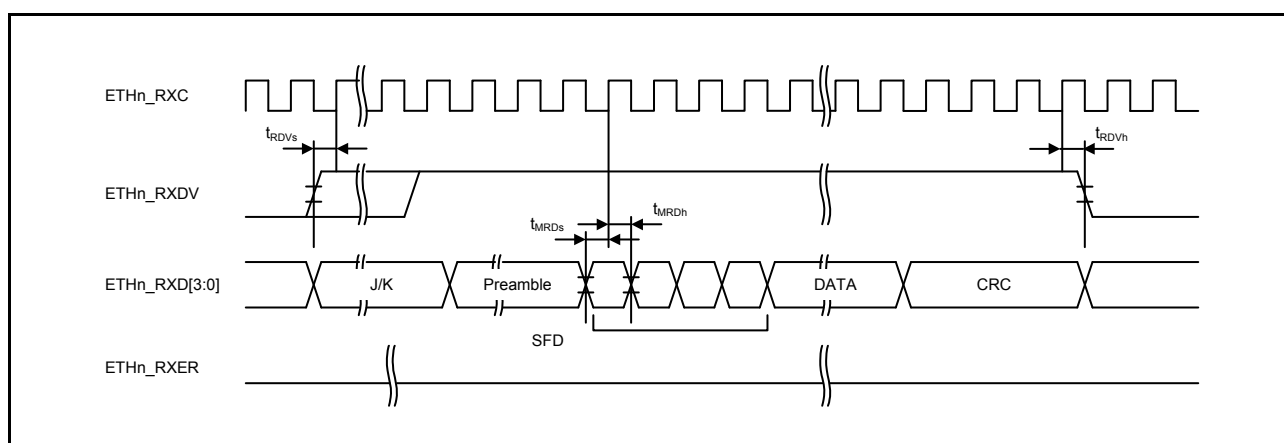


Figure 2.76 MII Reception Timing (Normal Operation)

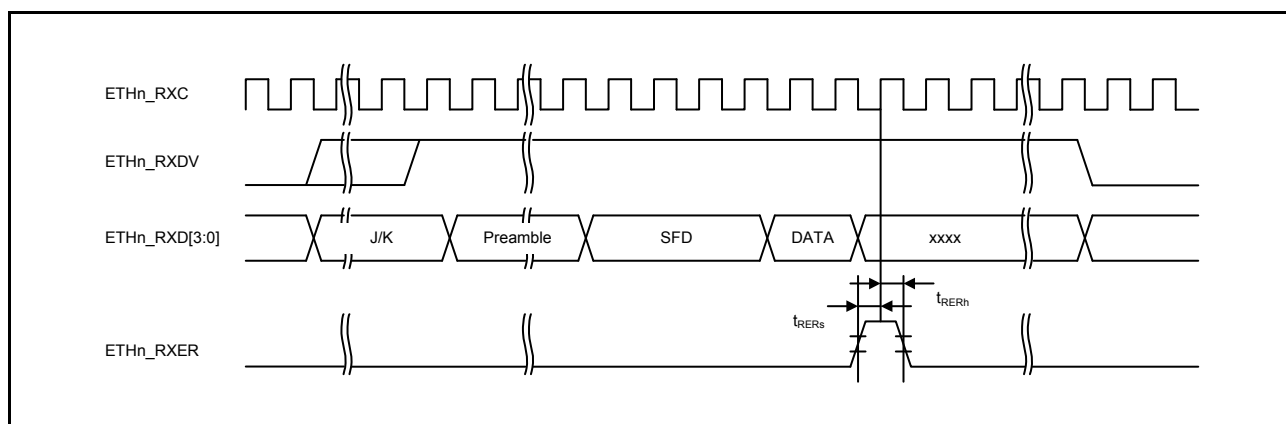


**Figure 2.77** MII Reception Timing (Error Occurrence)

## 2.4.5.15 Serial Management Interface

**Table 2.33 Serial Management Interface**Output load conditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30$  pF



| Item | Symbol                                      | min         | max | Unit | Test Conditions |
|------|---------------------------------------------|-------------|-----|------|-----------------|
| MDIO | ETHn_MDC output cycle                       | $t_{MDC}$   | 80  | —    | ns              |
|      | ETHn_MDIO input setting time (to ETHn_MDC↑) | $t_{SMDIO}$ | 10  | —    | ns              |
|      | ETHn_MDIO input hold time (to ETHn_MDC↑)    | $t_{HMDIO}$ | 0   | —    | ns              |
|      | ETHn_MDIO output delay time (to ETHn_MDC↓)  | $t_{DMDIO}$ | —   | 20   | ns              |

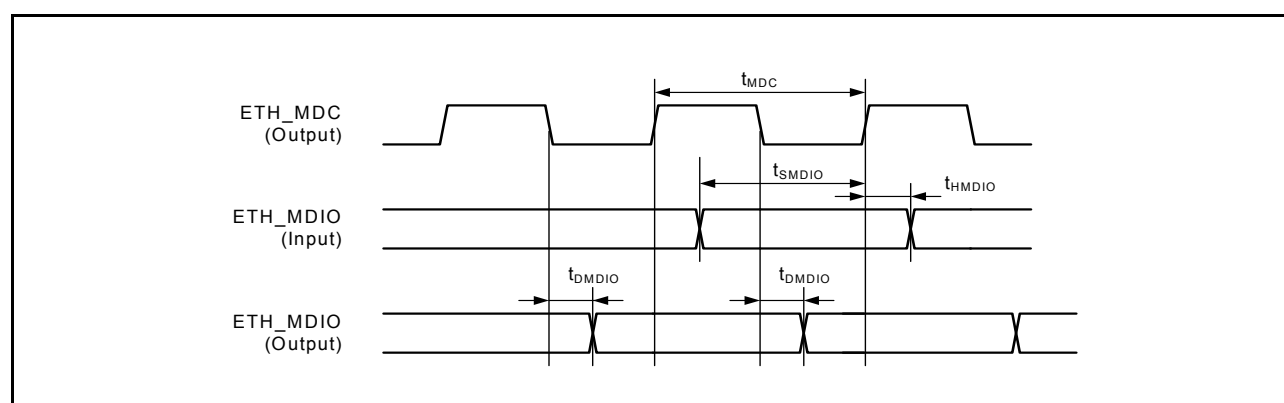
**Figure 2.78 Serial Management Access Timing**

## 2.4.5.16 Delta-Sigma Interface Timing

**Table 2.34**  $\Delta\Sigma$  Interface TimingConditions:  $V_{OH} = V_{CCQ33} \times 0.5$ ,  $V_{OL1} = V_{CCQ33} \times 0.5$ ,  $C = 30$  pF

| Item  |                  | Symbol | min          | max | Unit        | Test Conditions |                             |
|-------|------------------|--------|--------------|-----|-------------|-----------------|-----------------------------|
| DSMIF | Clock cycle      | Master | $t_{DScyc}$  | 1   | $t_{DCcyc}$ | Figure 2.79     |                             |
|       |                  | Slave  | 40           | 200 | ns          |                 |                             |
|       | Clock high level | Master | $t_{DSCKWH}$ | 16  | —           | ns              |                             |
|       |                  | Slave  | 16           | —   | ns          |                 |                             |
|       | Clock low level  | Master | $t_{DSCKWL}$ | 16  | —           | ns              |                             |
|       |                  | Slave  | 16           | —   | ns          |                 |                             |
|       | Setup time       | Master | $t_{SU}$     | 15  | —           | ns              | Figure 2.80,<br>Figure 2.81 |
|       |                  | Slave  | 10           | —   | ns          |                 |                             |
|       | Hold time        | Master | $t_H$        | 0   | —           | ns              |                             |
|       |                  | Slave  | 10           | —   | ns          |                 |                             |

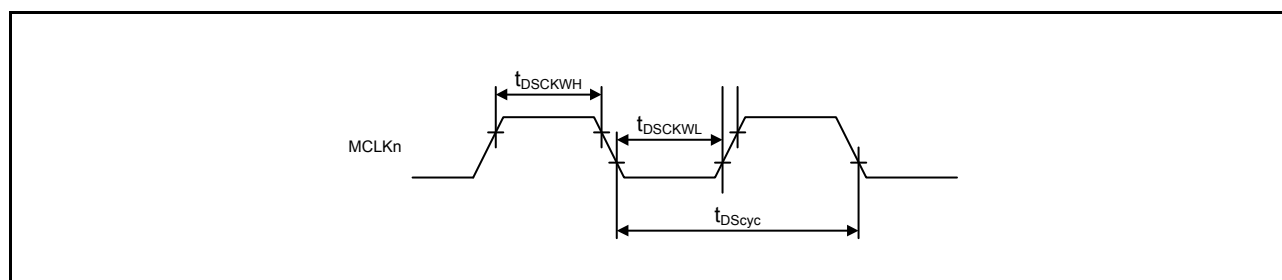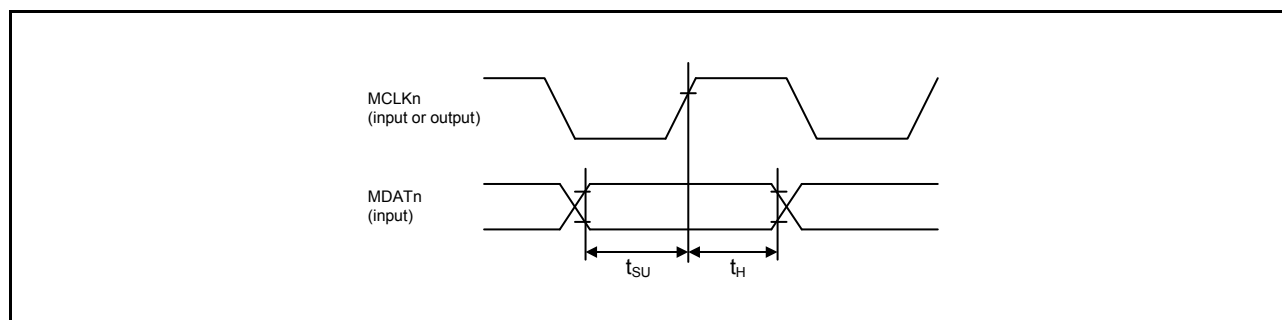Note:  $t_{DCcyc}$ : One cycle time of the  $\Delta\Sigma$  interface clock (DSCLK0, DSCLK1)**Figure 2.79** Clock Input/Output Timing**Figure 2.80** Reception Timing (MCLKn Rising Synchronous)

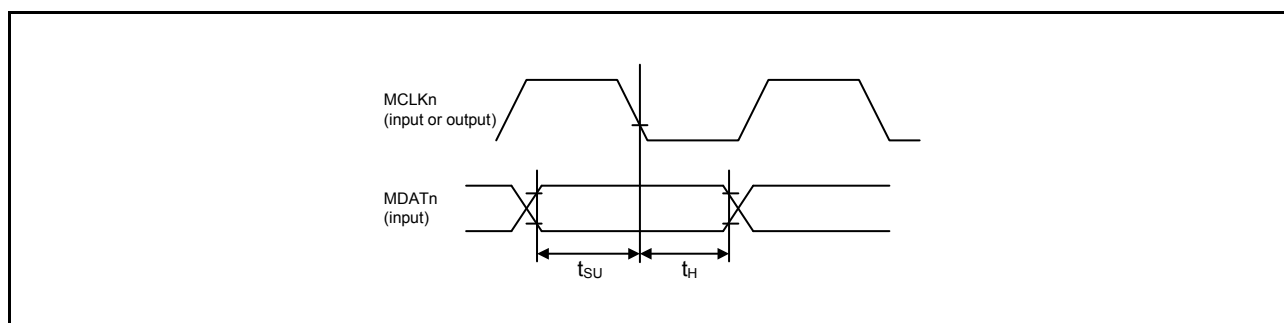

**Figure 2.81 Reception Timing (MCLKn Falling Synchronous)**


## 2.5 USB Characteristics

- Conditions:  $V_{DD} = PLLVDD0 = PLLVDD1 = DVDD\_USB = 1.14$  to  $1.26$  V,  
 $VCCQ33 = AVCC0 = AVCC1 = VREFH0 = VREFH1 = VDD33\_USB = 3.0$  to  $3.6$  V  
 $VSS = PLLVSS0 = PLLVSS1 = AVSS0 = AVSS1 = VREFL0 = VREFL1 = VSS\_USB = 0$  V,  
 $T_j = -40$  to  $125$  °C


Note: The 176-pin HLQFP does not have pins AVCC1, AVSS1, VREFH1, and VREFL1.

**Table 2.35 On-chip USB Full-Speed Characteristics (USB\_DP, USB\_DM Pin Characteristics)**

| Item                      | Symbol            | min | typ | max    | Unit | Test Conditions   |
|---------------------------|-------------------|-----|-----|--------|------|-------------------|
| Rising time               | $t_{FR}$          | 4   | —   | 20     | ns   | Figure 2.82       |
| Falling time              | $t_{FF}$          | 4   | —   | 20     | ns   |                   |
| Rising/falling time ratio | $t_{FR} / t_{FF}$ | 90  | —   | 111.11 | %    | $t_{FR} / t_{FF}$ |

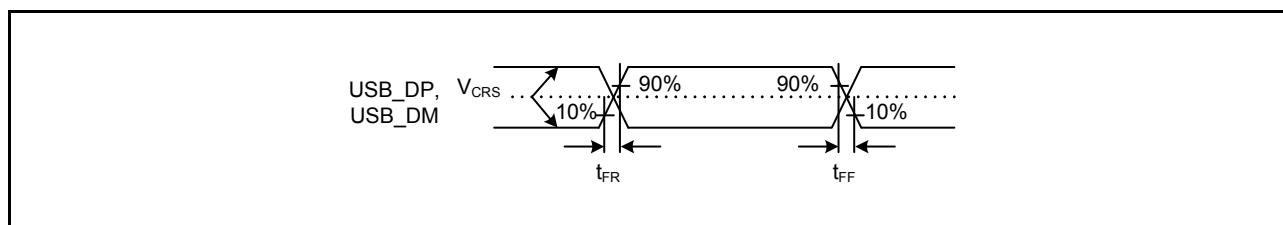



**Figure 2.82 USB\_DP, USB\_DM Output Timing (Full Speed)**

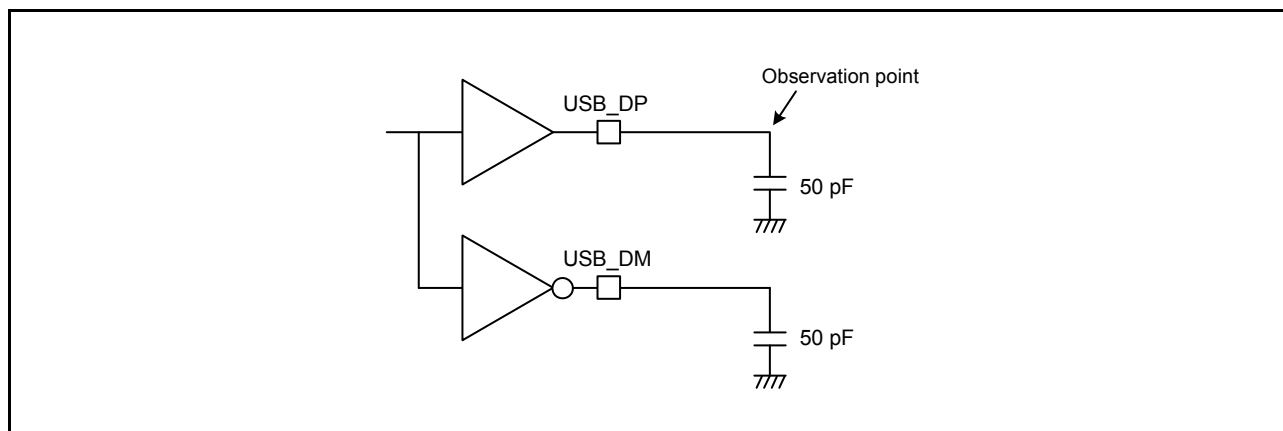

**Figure 2.83 Measurement Circuit (Full Speed)**

**Table 2.36 On-chip USB High-Speed Characteristics (USB\_DP, USB\_DM Pin Characteristics)**

| Item               |                   | Symbol      | min  | Typ | max  | Unit     | Test Conditions |
|--------------------|-------------------|-------------|------|-----|------|----------|-----------------|
| AC characteristics | Rising time       | $t_{HSR}$   | 500  | —   | —    | ps       | Figure 2.84     |
|                    | Falling time      | $t_{HSF}$   | 500  | —   | —    | ps       |                 |
|                    | Output resistance | $Z_{HSDRV}$ | 40.5 | —   | 49.5 | $\Omega$ |                 |

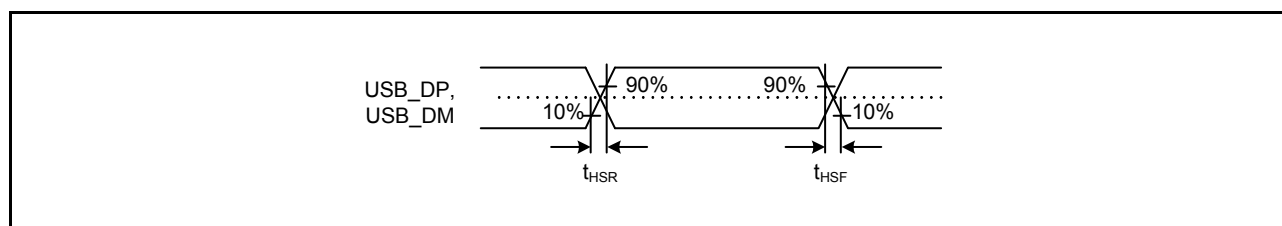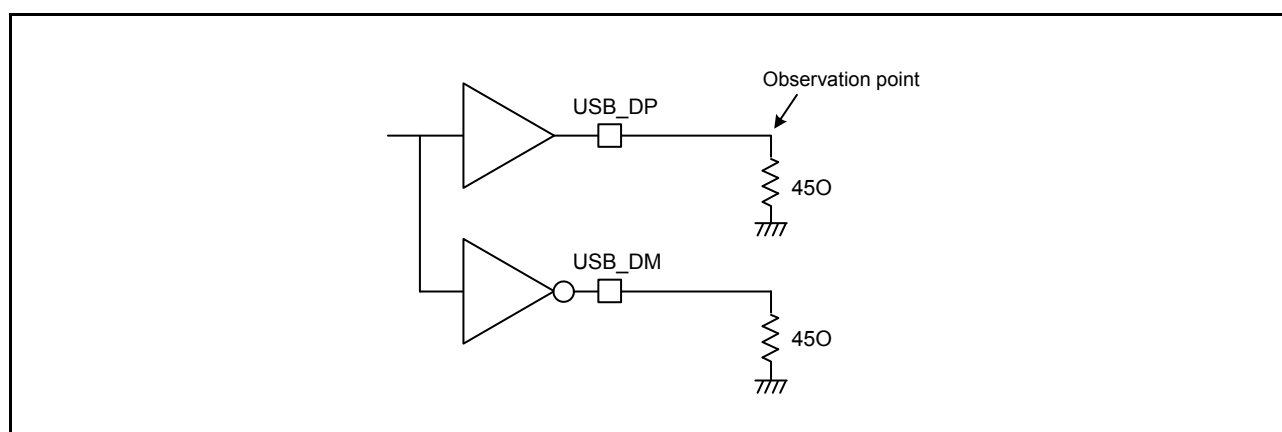**Figure 2.84 USB\_DP, USB\_DM Output Timing (High Speed)****Figure 2.85 Measurement Circuit (High Speed)**

## 2.6 A/D Conversion Characteristics

- Conditions: VDD = PLLVDD0 = PLLVDD1 = DVDD\_USB = 1.14 to 1.26 V,  
VCCQ33 = AVCC0 = AVCC1 = VREFH0 = VREFH1 = VDD33\_USB = 3.0 to 3.6 V  
VSS = PLLVSS0 = PLLVSS1 = AVSS0 = AVSS1 = VREFL0 = VREFL1 = VSS\_USB = 0 V,  
Tj = -40 to 125 °C

Note: The 176-pin HLQFP does not have pins AVCC1, AVSS1, VREFH1, and VREFL1.

**Table 2.37 12-Bit A/D (Unit 0) Conversion Characteristics**

| Item                                                                   |                                                                                                           | min                      | typ  | max           | Unit | Test Conditions                                                                                                                                      |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------|------|---------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resolution                                                             |                                                                                                           | 8                        | —    | 12            | Bit  |                                                                                                                                                      |
| Analog input capacitance                                               |                                                                                                           | —                        | —    | 30            | pF   |                                                                                                                                                      |
| Channel-dedicated sample-and-hold circuits in use (AN000 to AN003)     | Conversion time*1<br>(Operation at PCLKF = 60 MHz)<br>Permissible signal source impedance<br>Max. = 1.0kΩ | 1.2<br>(0.4 + 0.4)<br>*2 | —    | 3.6           | μs   | <ul style="list-style-type: none"> <li>Sampling of channel dedicated sample-and-hold circuits in 24 states</li> <li>Sampling in 24 states</li> </ul> |
| When disconnection detection assistance is in use                      | Offset error                                                                                              | —                        | —    | ±7.5          | LSB  |                                                                                                                                                      |
|                                                                        | Full-scale error                                                                                          | —                        | —    | ±7.5          | LSB  |                                                                                                                                                      |
|                                                                        | Quantization error                                                                                        | —                        | ±0.5 | —             | LSB  |                                                                                                                                                      |
|                                                                        | Absolute accuracy                                                                                         | —                        | —    | ±7.5          | LSB  |                                                                                                                                                      |
|                                                                        | DNL differential nonlinearity error                                                                       | —                        | —    | ±3.0          | LSB  |                                                                                                                                                      |
|                                                                        | INL integral nonlinearity error                                                                           | —                        | —    | ±4.0          | LSB  |                                                                                                                                                      |
|                                                                        | Holding characteristics of sample-and-hold circuits                                                       | —                        | —    | 3.2           | μs   | Self-diagnosis + 4-channel simultaneous sampling                                                                                                     |
|                                                                        | Dynamic range                                                                                             | 0.25                     | —    | VREFH0 – 0.25 | V    |                                                                                                                                                      |
| Channel-dedicated sample-and-hold circuits in use (AN000 to AN003)     | Conversion time*1<br>(Operation at PCLKF = 60 MHz)<br>Permissible signal source impedance<br>Max. = 1.0kΩ | 1.2<br>(0.4 + 0.4)<br>*2 | —    | 3.6           | μs   | <ul style="list-style-type: none"> <li>Sampling of channel dedicated sample-and-hold circuits in 24 states</li> <li>Sampling in 24 states</li> </ul> |
| When disconnection detection assistance is not in use                  | Offset error                                                                                              | —                        | —    | ±6.5          | LSB  |                                                                                                                                                      |
|                                                                        | Full-scale error                                                                                          | —                        | —    | ±6.5          | LSB  |                                                                                                                                                      |
|                                                                        | Quantization error                                                                                        | —                        | ±0.5 | —             | LSB  |                                                                                                                                                      |
|                                                                        | Absolute accuracy                                                                                         | —                        | —    | ±6.5          | LSB  |                                                                                                                                                      |
|                                                                        | DNL differential nonlinearity error                                                                       | —                        | —    | ±3.0          | LSB  |                                                                                                                                                      |
|                                                                        | INL integral nonlinearity error                                                                           | —                        | —    | ±4.0          | LSB  |                                                                                                                                                      |
|                                                                        | Holding characteristics of sample-and-hold circuits                                                       | —                        | —    | 3.2           | μs   | Self-diagnosis + 4-channel simultaneous sampling                                                                                                     |
|                                                                        | Dynamic range                                                                                             | 0.25                     | —    | VREFH0 – 0.25 | V    |                                                                                                                                                      |
| Channel-dedicated sample-and-hold circuits not in use (AN000 to AN007) | Conversion time*1<br>(Operation at PCLKF = 60 MHz)<br>Permissible signal source impedance<br>Max. = 1.0kΩ | 0.483<br>(0.267)*2       | —    | —             | μs   | Sampling in 16 states                                                                                                                                |
|                                                                        | Offset error                                                                                              | —                        | —    | ±5.0          | LSB  |                                                                                                                                                      |
|                                                                        | Full-scale error                                                                                          | —                        | —    | ±5.0          | LSB  |                                                                                                                                                      |
|                                                                        | Quantization error                                                                                        | —                        | ±0.5 | —             | LSB  |                                                                                                                                                      |
|                                                                        | Absolute accuracy                                                                                         | —                        | —    | ±6.0          | LSB  |                                                                                                                                                      |
|                                                                        | DNL differential nonlinearity error                                                                       | —                        | —    | ±2.5          | LSB  |                                                                                                                                                      |
|                                                                        | INL integral nonlinearity error                                                                           | —                        | —    | ±3.0          | LSB  |                                                                                                                                                      |

Note: The above specified values apply when there is no access to the external bus during A/D conversion. If access proceeds during A/D conversion, values may not fall within the above ranges.

Note 1. The conversion time is the total of the sampling time and the comparison time ( $t_{SPLSH} + t_{CONV}$  in Figure 43.31 and Figure 43.32 in section 43, 12-Bit A/D Converter (S12ADCa)). The number of sampling states is indicated for each item in Test Conditions.

Note 2. The value in parentheses indicates the sampling time.

**Table 2.38 12-Bit A/D (Unit 1) Conversion Characteristics**

| Item                                                  |                                                        | min                | typ  | max  | Unit | Test Conditions       |
|-------------------------------------------------------|--------------------------------------------------------|--------------------|------|------|------|-----------------------|
| Resolution                                            |                                                        | 8                  | —    | 12   | Bit  |                       |
| Conversion time*1<br>(Operation at PCLKF<br>= 60 MHz) | Permissible signal source<br>impedance<br>Max. = 1.0kΩ | 0.883<br>(0.667)*2 | —    | —    | μs   | Sampling in 40 states |
| Analog input capacitance                              |                                                        | —                  | —    | 30   | pF   |                       |
| Offset error                                          |                                                        | —                  | —    | ±6.0 | LSB  |                       |
| Full-scale error                                      |                                                        | —                  | —    | ±6.0 | LSB  |                       |
| Quantization error                                    |                                                        | —                  | ±0.5 | —    | LSB  |                       |
| Absolute accuracy                                     |                                                        | —                  | —    | ±6.0 | LSB  |                       |
| DNL differential nonlinearity error                   |                                                        | —                  | —    | ±3.0 | LSB  |                       |
| INL integral nonlinearity error                       |                                                        | —                  | —    | ±4.0 | LSB  |                       |

Note: The above specified values apply when there is no access to the external bus during A/D conversion. If access proceeds during A/D conversion, values may not fall within the above ranges.

Note 1. The conversion time is the total of the sampling time and the comparison time ( $t_{SPLSH} + t_{CONV}$  in Figure 43.31 and Figure 43.32 in section 43, 12-Bit A/D Converter (S12ADCa)). The number of sampling states is indicated for each item in Test Conditions.

Note 2. The value in parentheses indicates the sampling time.

## 2.7 Temperature Sensor Characteristics

- Conditions: VDD = PLLVDD0 = PLLVDD1 = DVDD\_USB = 1.14 to 1.26 V,  
VCCQ33 = AVCC0 = AVCC1 = VREFH0 = VREFH1 = VDD33\_USB = 3.0 to 3.6 V  
VSS = PLLVSS0 = PLLVSS1 = AVSS0 = AVSS1 = VREFL0 = VREFL1 = VSS\_USB = 0 V,  
Tj = -40 to 125 °C

Note: The 176-pin HLQFP does not have pins AVCC1, AVSS1, VREFH1, and VREFL1.


**Table 2.39 Temperature Sensor Characteristics**

| Item                          | min  | typ  | max | Unit  | Test Conditions                                                                     |
|-------------------------------|------|------|-----|-------|-------------------------------------------------------------------------------------|
| Relative accuracy             | —    | ±1   | —   | °C    |                                                                                     |
| Temperature slope             | —    | 4.1  | —   | mV/°C |                                                                                     |
| Output voltage (at 25°C)      | —    | 1.21 | —   | V     |                                                                                     |
| Temperature sensor start time | —    | —    | 30  | μs    |                                                                                     |
| Sampling time                 | 4.25 | —    | —   | μs    | ADSSTR.SST[7:0] = 255 states<br>(when PCLKF [ADC (unit0) sampling CLK]<br>= 60 MHz) |

## 2.8 Oscillation Stop Detection Timing

**Table 2.40 Oscillation Stop Detection Circuit Characteristics**

| Item                 | Symbol   | min | typ | max | Unit | Test Conditions |
|----------------------|----------|-----|-----|-----|------|-----------------|
| Clock switching time | $t_{dr}$ | —   | —   | 1   | ms   | Figure 2.86     |

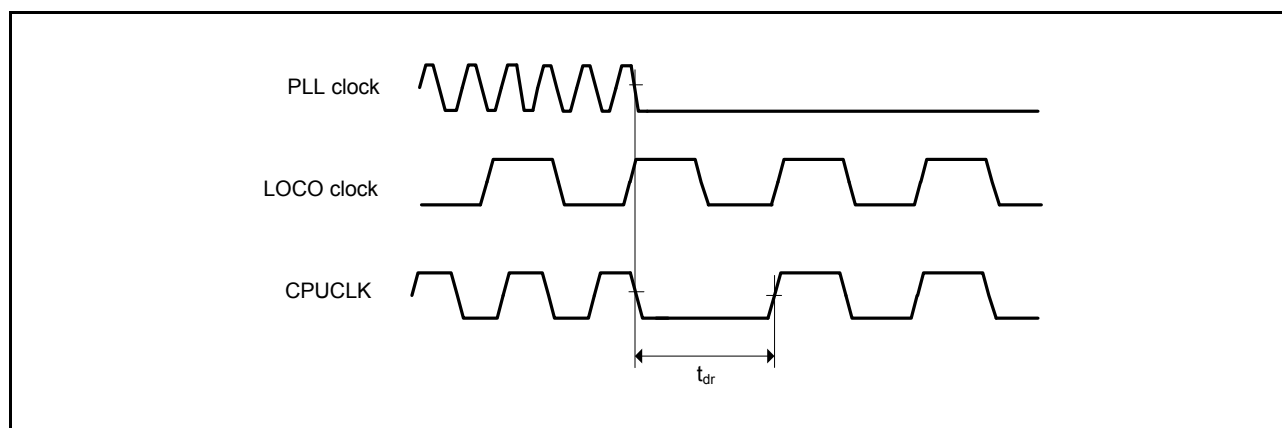


**Figure 2.86 Oscillation Stop Detection Timing**


## 2.9 Debug Interface Timing

**Table 2.41 Debug Interface Timing**


Output load conditions:  $V_{OH} = V_{CCQ33} - 0.5\text{ V}$ ,  $V_{OL1} = 0.4\text{ V}$

| Item                        | Symbol        | Min.                       | Max.                       | Unit         | Reference Figure                  |
|-----------------------------|---------------|----------------------------|----------------------------|--------------|-----------------------------------|
| TCK cycle time              | $t_{TCKcyc}$  | 30                         | —                          | ns           | Figure 2.87                       |
| TCK high pulse width        | $t_{TCKH}$    | 0.4                        | 0.6                        | $t_{TCKcyc}$ |                                   |
| TCK low pulse width         | $t_{TCKL}$    | 0.4                        | 0.6                        | $t_{TCKcyc}$ |                                   |
| TDI setup time              | $t_{TDIS}$    | 5                          | —                          | ns           | Figure 2.88<br>Output load: 30 pF |
| TDI hold time               | $t_{TDIH}$    | 5                          | —                          | ns           |                                   |
| TMS/SWDIO setup time        | $t_{TMSS}$    | 5                          | —                          | ns           |                                   |
| TMS/SWDIO hold time         | $t_{TMSH}$    | 5                          | —                          | ns           |                                   |
| SWDIO delay time            | $t_{SWDO}$    | —                          | 15                         | ns           |                                   |
| TDO delay time              | $t_{TDOD}$    | —                          | 15                         | ns           | Figure 2.89                       |
| Capture register setup time | $t_{CAPTS}$   | 5                          | —                          | ns           |                                   |
| Capture register hold time  | $t_{CAPTH}$   | 5                          | —                          | ns           |                                   |
| Update register delay time  | $t_{UPDATED}$ | —                          | 15                         | ns           |                                   |
| Trace clock cycle           | $t_{TCYC}$    | 26.6                       | —                          | ns           | Figure 2.90<br>Output load: 15 pF |
| Trace data delay time       | $t_{TDT}$     | $0.25 \times t_{TCYC} - 2$ | $0.25 \times t_{TCYC} + 2$ | ns           |                                   |

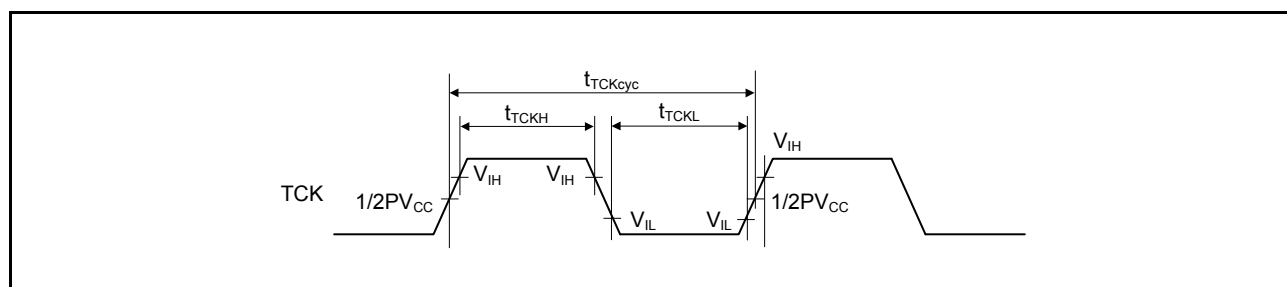

**Figure 2.87 TCK Input Timing**

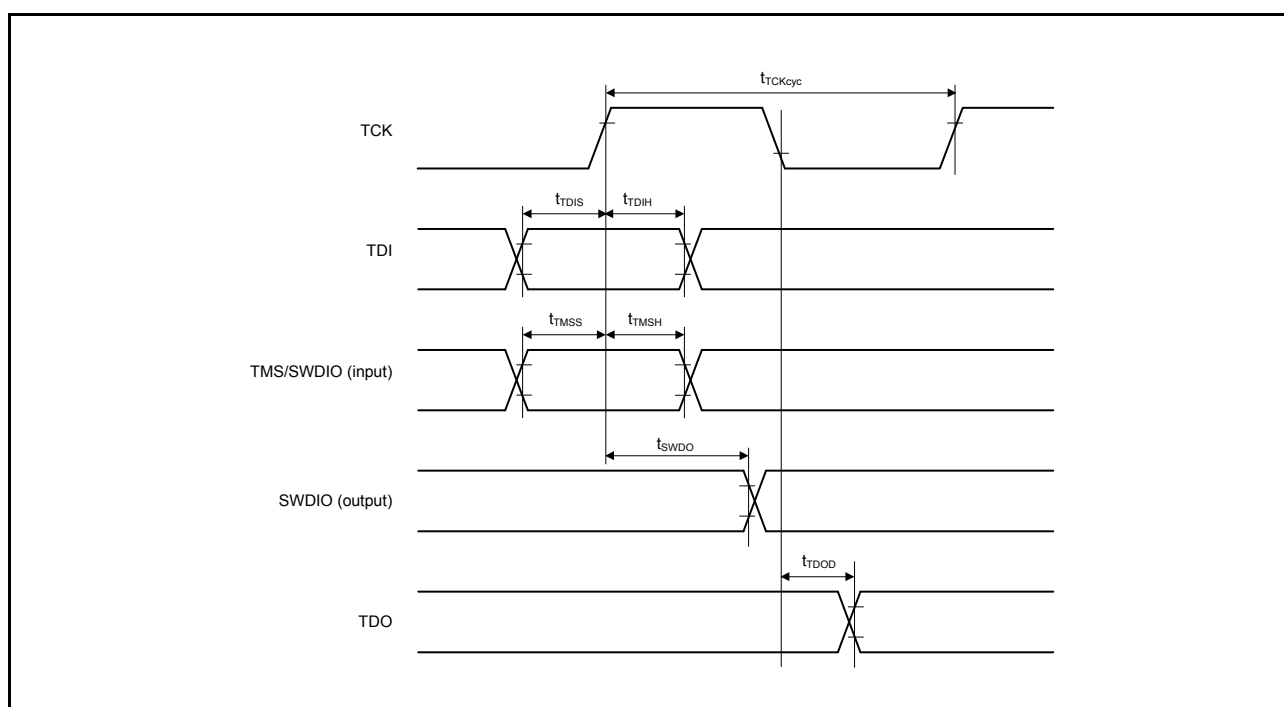

**Figure 2.88 Data Transfer Timing**

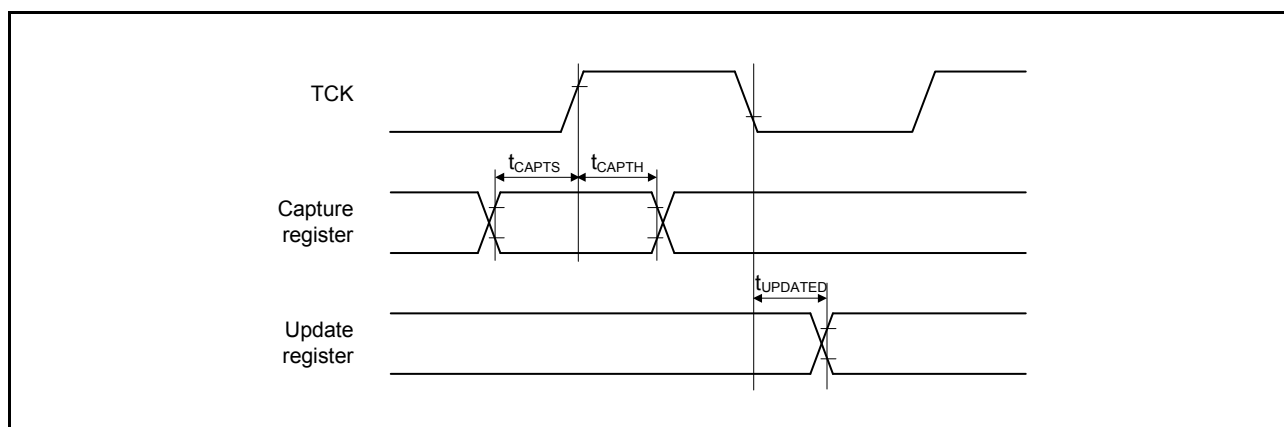

**Figure 2.89 Boundary Scan Input/Output Timing**

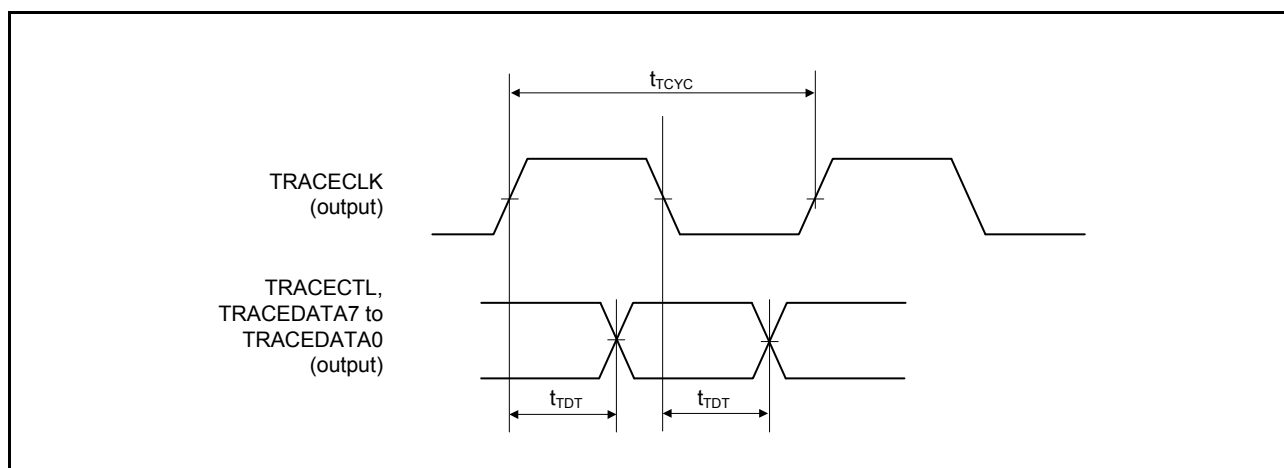**Figure 2.90** Trace Interface Timing

| REVISION HISTORY |              | RZ/T1 Group Datasheet         |                                                                                                                        |
|------------------|--------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Rev.             | Date         | Description                   |                                                                                                                        |
|                  |              | Page                          | Summary                                                                                                                |
| 0.60             | Nov 14, 2014 | —                             | First edition, issued                                                                                                  |
| 0.70             | Dec.25, 2014 | Features                      |                                                                                                                        |
|                  |              | 1                             | ■ Operating temperature range: Heading title and description corrected                                                 |
|                  |              | Section 1 Overview            |                                                                                                                        |
|                  |              | 11                            | Table 1.3 List of Products (2 / 2): Note corrected                                                                     |
|                  |              | 21                            | Figure 1.3 Pin Arrangement (176-pin HLQFP): The names of pins 33, 34, 38, 39, and 91, corrected                        |
|                  |              | 26                            | Table 1.5 Pin Assignments (320-Pin FBGA) (5 / 8): The names of pins M20 and P19, corrected                             |
|                  |              | 27                            | Table 1.5 Pin Assignments (320-Pin FBGA) (6 / 8): The names of pins R14, R19, R20, T9, V7, and V8, corrected           |
|                  |              | 29                            | Table 1.5 Pin Assignments (320-Pin FBGA) (8 / 8): The names of pins Y16 and Y17, corrected                             |
|                  |              | 30                            | Table 1.6 Pin Assignments (176-Pin HLQFP) (1 / 4): The names of pins 33, 34, 38, and 39, corrected                     |
|                  |              | 31                            | Table 1.6 Pin Assignments (176-Pin HLQFP) (2 / 4): The names of pins 58, 59, 60, 79, 82, and 83, corrected             |
|                  |              | 32                            | Table 1.6 Pin Assignments (176-Pin HLQFP) (3 / 4): The names of pins 91 and 110, corrected                             |
|                  |              | 33                            | Table 1.6 Pin Assignments (176-Pin HLQFP) (4 / 4): The names of pins 136, 153, 154, 155, 156, and 157, corrected       |
|                  |              | 39                            | Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (6 / 10): The name of pin M20, corrected                        |
|                  |              | 40                            | Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (7 / 10): The names of pins P19, R8, and R14, corrected         |
|                  |              | 41                            | Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (8 / 10): The names of pins R19, R20, T9, V7, and V8, corrected |
|                  |              | 42                            | Table 1.7 List of Pin and Pin Functions (320-Pin FBGA) (9 / 10): The names of pins Y16 and Y17, corrected              |
| 1.10             | Jul.08, 2016 | Feature                       |                                                                                                                        |
|                  |              | 1                             | Wholly amended                                                                                                         |
|                  |              | 1. Overview                   |                                                                                                                        |
|                  |              | 2 to 49                       | Wholly amended                                                                                                         |
|                  |              | 2. Electrical Characteristics |                                                                                                                        |
|                  |              | 50 to 129                     | Newly added                                                                                                            |

## General Precautions in the Handling of MPU/MCU Products

The following usage notes are applicable to all MPU/MCU products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

### 1. Handling of Unused Pins

Handle unused pins in accordance with the directions given under Handling of Unused Pins in the manual.

- The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

### 2. Processing at Power-on

The state of the product is undefined at the moment when power is supplied.

- The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.  
In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

### 3. Prohibition of Access to Reserved Addresses

Access to reserved addresses is prohibited.

- The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

### 4. Clock Signals

After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.

- When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

### 5. Differences between Products

Before changing from one product to another, i.e. to a product with a different part number, confirm that the change will not lead to problems.

- The characteristics of an MPU or MCU in the same group but having a different part number may differ in terms of the internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
  2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
  3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
  4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
  5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
  6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
  7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
  8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
  9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
  10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
  11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
  12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



### SALES OFFICES

### Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**Renesas Electronics America Inc.**  
2801 Scott Boulevard Santa Clara, CA 95050-2549, U.S.A.  
Tel: +1-408-588-6000, Fax: +1-408-588-6130

**Renesas Electronics Canada Limited**  
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada  
Tel: +1-905-898-5441, Fax: +1-905-898-3220

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-585-100, Fax: +44-1628-585-900

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
Room 1709, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100191, P.R.China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, P. R. China 200333  
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2265-6688, Fax: +852 2886-9022/9044

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan  
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics Korea Co., Ltd.**  
12F., 234 Teheran-ro, Gangnam-Ku, Seoul, 135-920, Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5141