


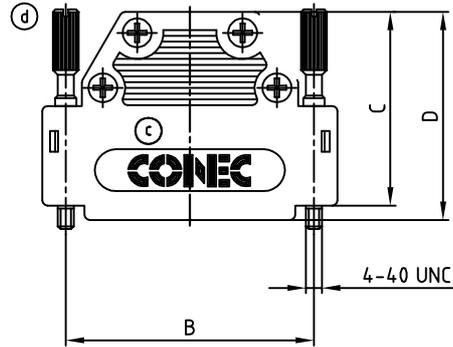


used for: D-SUB


Ⓒ 9pos.




15-50pos.

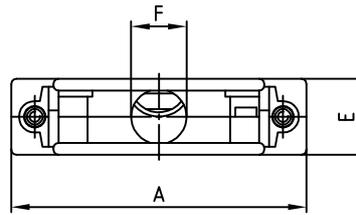

Ⓑ CABLE CLAMP:
9-37pos.



Ⓑ CABLE CLAMP:
50pos.



POS.	A	B	C	D	E	F	G	H	K	L	M	Part NO.
9	34.0	25.0	25.0	27.75	14.5	8.5	17.6	12.0	4.8	0.8	2.6	165X10909X
15	42.3	33.3	37.0	39.75	14.5	10.0	17.6	12.0	4.8	0.8	2.6	165X10919X
25	56.0	47.0	37.0	39.75	14.5	10.5	26.4	20.0	4.8	0.8	4.4	165X10929X
37	72.5	63.5	37.0	39.75	14.5	10.5	26.4	20.0	4.8	0.8	4.4	165X10939X
50	70.0	61.1	50.0	50.00	21.0	10.5	26.0	20.0	6.0	1.0	4.2	165X10949X

NOTES:

1. HOOD MATERIAL: ABS UL94 V0, METALLIZED
2. SCREWS: BRASS, NICKEL-PLATING
- Ⓑ 3. CABLE CLAMPS: STEEL, NICKEL-PLATING
- Ⓒ 4. MAX. MOUNTING TORQUE 0,15 Nm
RECOMMENDED MOUNTING TORQUE 0,1 Nm

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name	tolerance	dim. in mm
1 x e	Ä6403	09.11.2016	Lehmen	2011	
2 x d	Ä3961	06.04.2011	K.H	drawn	20.06. Lehmenkühler
2 x c	Ä3525	14.12.2009	Henne	appd.	20.06. Labus
3 x b	Ä1898	08.12.2003	Lehmen	norm	
a	Original			d-old	



scale:	2:1
material:	SEE SPECIFICATION
title:	PLASTIC HOOD 9-50pos.
dwg no:	16K1A972
part no:	SEE TABLE

DIN-A
3
sh: 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[165X10269X](#) [165X10909X](#) [165X10919X](#) [165X10939X](#) [165X10249X](#)