


used for: D-SUB

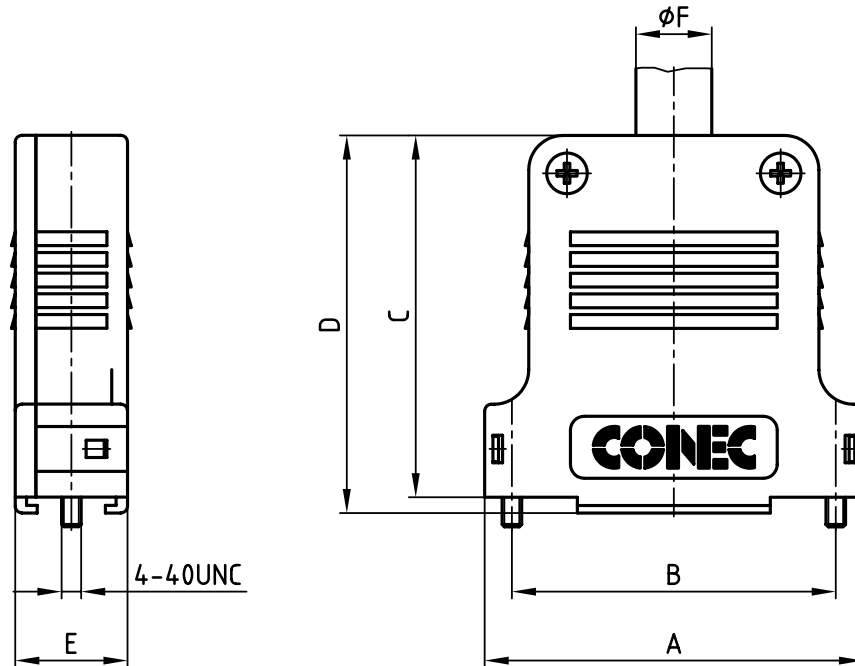

No. of pos.	A	B	C	D	E	ØF	PART NO.
9	32.9	25.0	39.5	41.8	16.3	11.0	165X13369XE
15	41.2	33.3	45.5	47.8	16.3	11.0	165X13379XE
25	54.9	47.0	52.5	54.8	16.3	12.0	165X13389XE
37	71.4	63.5	55.0	57.8	18.7	15.0	165X13399XE
50	69.0	61.1	55.0	57.8	19.5	14.0	165X13409XE

Directive 2002/95/EC
"RoHS"
Compliant

HOOD ASSEMBLY CONSISTS OF:

- 1 x HOOD + COVER: PBT UL 94 V-0; BLACK
- 1 x PRESS INSERT: PBT UL 94 V-0; BLACK
- 2 x JACKSCREWS: BRASS; NICKEL PLATED
- 2 x SCREW FOR STRAIN RELIEF: STEEL; ZINC PLATED
- 2 x COVER SCREWS: STEEL; NICKEL PLATED
- 1 x STRAIN RELIEF: STEEL; NICKEL PLATED

TECHNICAL DATA:

- TEMPERATURE RANGE: -33°C to +90°C

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

tolerance



scale: 1:1
material: SEE DRAWING

2006	date	name
drawn	06.02.	Lehmenkühler
appd.	06.02.	Mickenbecker
norm		
d-old		

title:
PLASTIC HOOD
9-50pos. WITH STRAIGHT CABLE EXIT
big space inside

dwg no: AutoCAD 2004 DIN-A
4
sh: 1/1

CONEC®

part no: SEE TABLE

rev.	description	date	name
------	-------------	------	------