


Super Frequency Ceramic RF Chip Inductors - 0402CH Series

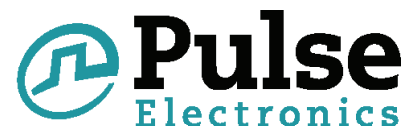

- Monolithic inorganic material construction
- Very High Q Values
- High Self Resonant Frequency
- Industry Standard 0402 (1005) Surface Mount Land Pattern

Electrical Specifications @ 25°

Part Number	Inductance (nH)	Standard Tolerance	Test Frequency (MHz)	Q min.	Q (Typ.) Frequency (MHz)					I _{dc} (mA MAX)	R _{dc} (Ω MAX)	SRF (MHz MIN)
					300	800	900	1500	1800			
PE-0402CH1N0STT	1.0	±0.3nH	100	8	53	129	147	217	244	710	0.07	10000
PE-0402CH1N2STT	1.2	±0.3nH	100	8	45	97	110	156	177	710	0.07	10000
PE-0402CH1N5STT	1.5	±0.3nH	100	8	35	69	76	104	116	710	0.07	8000
PE-0402CH1N8STT	1.8	±0.3nH	100	8	32	61	66	92	100	710	0.07	6000
PE-0402CH2N0STT	2.0	±0.3nH	100	8	38	68	73	94	103	660	0.08	6000
PE-0402CH2N2STT	2.2	±0.3nH	100	8	37	67	71	92	101	660	0.08	6000
PE-0402CH2N4STT	2.4	±0.3nH	100	8	34	54	59	74	86	630	0.09	6000
PE-0402CH2N7STT	2.7	±0.3nH	100	8	30	49	52	67	73	630	0.09	6000
PE-0402CH3N0STT	3.0	±0.3nH	100	8	31	51	54	70	76	570	0.11	6000
PE-0402CH3N3STT	3.3	±0.3nH	100	8	32	54	57	72	79	540	0.12	6000
PE-0402CH3N6STT	3.6	±0.3nH	100	8	33	53	56	71	77	500	0.14	5000
PE-0402CH3N9STT	3.9	±0.3nH	100	8	34	53	56	70	76	490	0.15	4000
PE-0402CH4N2STT	4.3	±0.3nH	100	8	29	47	50	64	71	470	0.16	4000
PE-0402CH4N7STT	4.7	±0.3nH	100	8	30	48	51	65	72	450	0.17	4000
PE-0402CH5N1STT	5.1	±0.3nH	100	8	30	48	51	64	71	430	0.19	4000
PE-0402CH5N6STT	5.6	±0.3nH	100	8	30	48	51	65	71	420	0.2	4000
PE-0402CH6N2STT	6.2	±0.3nH	100	8	31	49	52	66	72	400	0.22	3900
PE-0402CH6N8JTT	6.8	±5%	100	8	28	44	49	59	64	390	0.23	3900
PE-0402CH7N5JTT	7.5	±5%	100	8	28	45	50	60	65	370	0.25	3700
PE-0402CH8N2JTT	8.2	±5%	100	8	29	46	50	62	66	360	0.27	3600
PE-0402CH8N2JTT	9.1	±5%	100	8	29	45	49	59	62	350	0.29	3400
PE-0402CH100JTT	10	±5%	100	8	28	45	48	57	60	330	0.31	3200
PE-0402CH120JTT	12	±5%	100	8	26	40	45	51	52	300	0.39	2700
PE-0402CH150JTT	15	±5%	100	8	25	38	42	49	51	280	0.45	2300

Notes:

- Inductance measured using a HP4286A RF Impedance Analyzer. (Please note that inductance information is not stamped on part, because of the extremely small size).
- Q measured using a HP4291A RF Impedance Analyzer with a HP16193A Test Fixture.
- SRF measured using a HP8753C Network Analyzer.
- RDC measured using a Valhalla Scientific model 4100 ATC Digital Ohm meter.
- Based on a 15° C maximum temperature rise.

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678

Taiwan 886 3 4356768

Super Frequency Ceramic RF Chip Inductors - 0402CH Series






Mechanicals

Schematics

0402CH Series


0.175±0.075

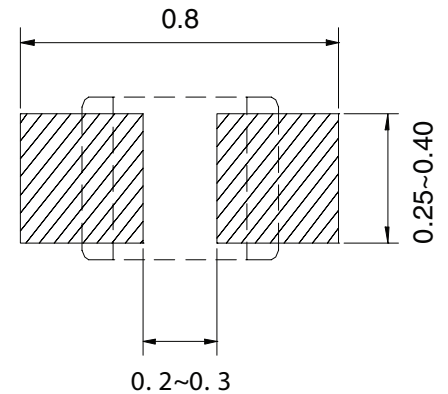


Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

Impedance v.s. Frequency Characteristics

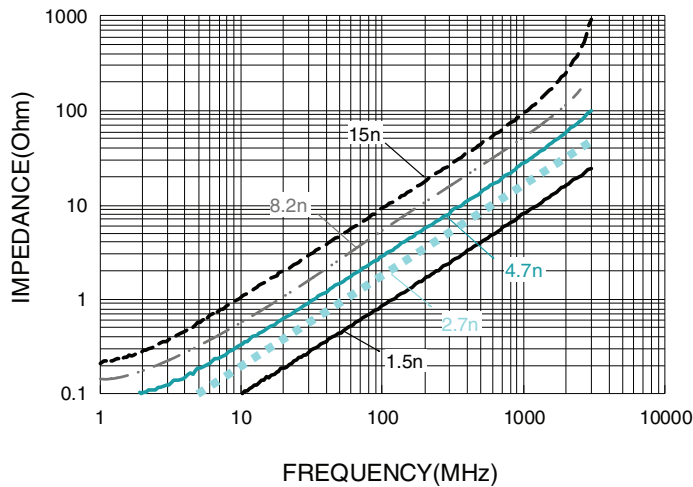


Inductance v.s. Frequency Characteristics

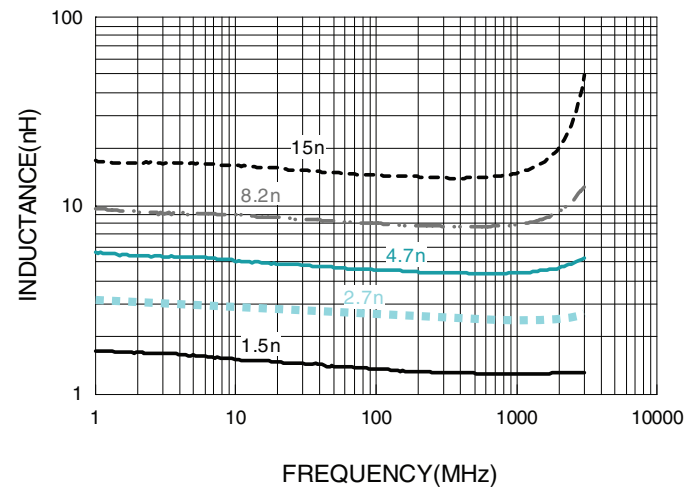

Super Frequency Ceramic RF Chip Inductors - 0402CH Series

Q v.s. Frequency Characteristics

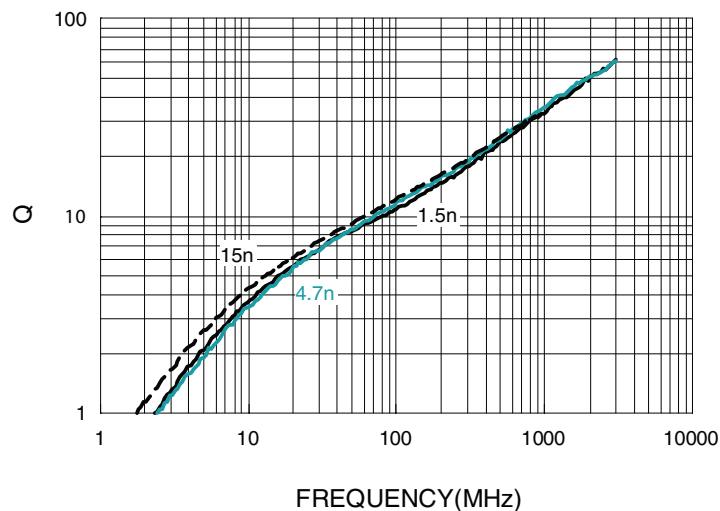

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2014. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PE-0402CH4N7STT](#) [PE-0402CH1N2STT](#) [PE-0402CH5N6STT](#) [PE-0402CH3N9STT](#) [PE-0402CH4N2STT](#) [PE-](#)
[0402CH2N4STT](#) [PE-0402CH2N7STT](#) [PE-0402CH6N8JTT](#) [PE-0402CH3N6STT](#) [PE-0402CH8N2JTT](#) [PE-](#)
[0402CH3N0STT](#) [PE-0402CH6N2STT](#) [PE-0402CH7N5JTT](#) [PE-0402CH120JTT](#) [PE-0402CH2N0STT](#) [PE-](#)
[0402CH1N8STT](#) [PE-0402CH2N2STT](#) [PE-0402CH1N5STT](#) [PE-0402CH3N3STT](#) [PE-0402CH100JTT](#) [PE-](#)
[0402CH150JTT](#) [PE-0402CH5N1STT](#) [PE-0402CH1N0STT](#)