



WRA_ZP-6W & WRB_ZP-6W Series

6W, WIDE INPUT, ISOLATED & REGULATED DUAL/ SINGLE OUTPUT DIP DC-DC CONVERTER

multi-country patent protection **RoHS**

FEATURES

Efficiency up to 86%
Wide (2:1) Input Range
1.5KVDC Input/Output Isolation
Short circuit protection(automatic recovery)
Operating Temperature: -40°C to +85°C
Internal SMD construction
Metal Shielding Package
No Heat Sink Required
Industry-Standard Pinout
MTBF>1,000,000 hours
RoHS Compliance

APPLICATIONS


The WRA_ZP-6W & WRB_ZP-6W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage ranges $\leq$ 2:1);
- 2) Where isolation is necessary between input and output(Isolation Voltage $\leq$ 1500VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

WRB2405ZP-6W

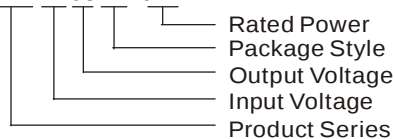

MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou
Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (%, Typ)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max*		Max	Min	
WRA0505ZP-6W	5	4.5-9	11	±5	±600	±60	76
WRA0512ZP-6W				±12	±250	±25	80
WRA0515ZP-6W				±15	±200	±20	82
WRB0505ZP-6W				5	1200	120	76
WRB0512ZP-6W				12	500	50	80
WRB0515ZP-6W				15	400	40	82
WRB0524ZP-6W				24	250	25	83
WRA1205ZP-6W	12	9-18	20	±5	±600	±60	78
WRA1212ZP-6W				±12	±250	±25	82
WRA1215ZP-6W				±15	±200	±20	84
WRB1203ZP-6W				3.3	1500	150	77
WRB1205ZP-6W				5	1200	120	78
WRB1212ZP-6W				12	500	50	82
WRB1215ZP-6W				15	400	40	84
WRB1224ZP-6W				24	250	25	83
WRA2405ZP-6W	24	18-36	40	±5	±600	±60	80
WRA2412ZP-6W				±12	±250	±25	84
WRA2415ZP-6W				±15	±200	±20	86
WRB2403ZP-6W				3.3	1500	150	79
WRB2405ZP-6W				5	1200	120	80
WRB2412ZP-6W				12	500	50	84
WRB2415ZP-6W				15	400	40	86
WRB2424ZP-6W				24	250	25	85
WRA4805ZP-6W	48	36-72	80	±5	±600	±60	80
WRA4812ZP-6W				±12	±250	±25	84
WRA4815ZP-6W				±15	±200	±20	86
WRB4805ZP-6W				5	1200	120	80
WRB4812ZP-6W				12	500	50	84
WRB4815ZP-6W				15	400	40	86
WRB4824ZP-6W				24	250	25	85

* Input voltage can't exceed this value, or will cause the permanent damage.

Note: The load shouldn't be less than 10%, otherwise ripple will increase dramatically.

Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output Power	See below products program	0.6		6	W
Positive Voltage Accuracy	Refer to recommended circuit		$\pm$ 1	$\pm$ 3	%
Negative Voltage Accuracy	Refer to recommended circuit		$\pm$ 3	$\pm$ 5	
Load Regulation	From 10% To 100% load		$\pm$ 0.5	$\pm$ 1*	
Line Regulation(at full load)	Input voltage from low to high		$\pm$ 0.2	$\pm$ 0.5	%/°C
Temperature Drift(Vout)	Refer to recommended circuit		0.02		
Ripple**	20MHz bandwidth		20	50	mVp-p
Noise**	20MHz bandwidth		50	100	
Switching Frequency	100% load, nominal Input voltage		300		KHz

*Dual output models unbalanced load: $\pm$ 5%.

**Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			40		
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Short circuit protection		Continuous, automatic recovery			
Case material		Copper, Nickel Plated			
Isolation voltage	Tested for 1 minute and 1 mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
No-load power consumption			500		mW
MTBF		1000			K hours
Weight			17		g


Note:

- All specifications measured at $T_A=25^{\circ}\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- See below recommended circuits for more details.

TYPICAL CHARECTERISTICS



OUTLINE DIMENSIONS & PIN CONNECTIONS

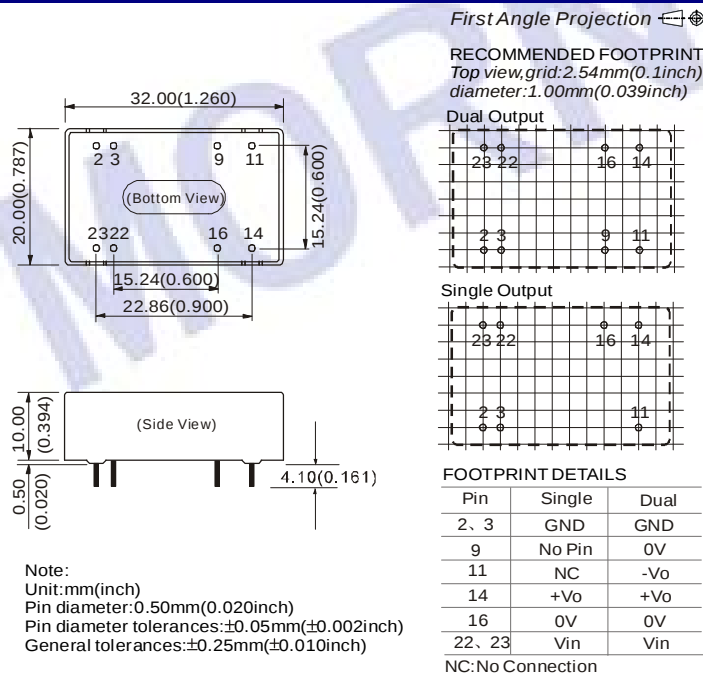


APPLICATION NOTE

Requirement On Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load **no less than 10% load**. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

Recommended Circuit

All the WRA_ZP-6W&WRB_ZP-6W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 1).

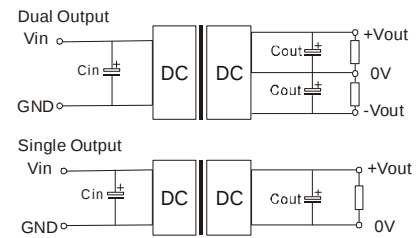

(Figure 1)

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1). General:

Cin: 5V&12V 100μF
24V&48V 10μF-47μF
Cout: 10μF/100mA


Output External Capacitor Table (Table 1)

Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
3.3	2200	±5	680
5	1000	±9	470
9	680	±12	330
12	470	±15	220
15	330		
24	220		

Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module (See figure 2), General:

$$I_p \leq 1.4 \cdot I_{in-max}$$



(Figure 2)

No parallel connection or plug and play.