
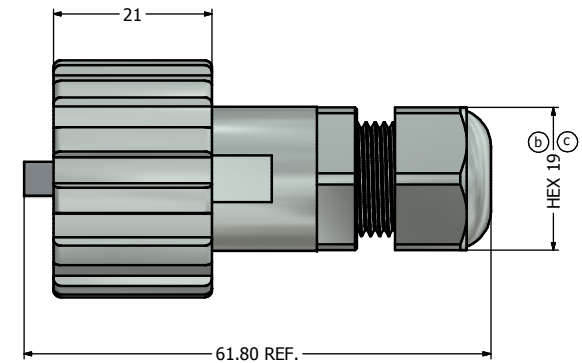
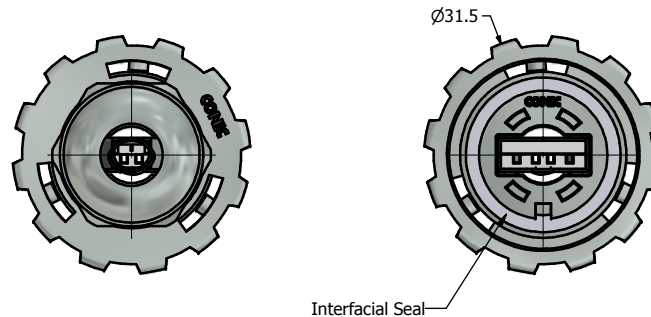
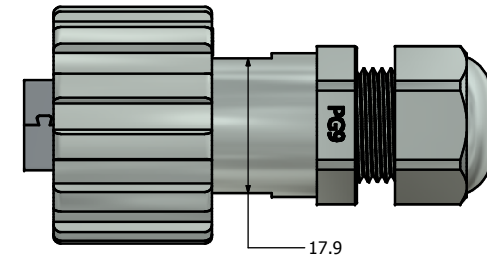


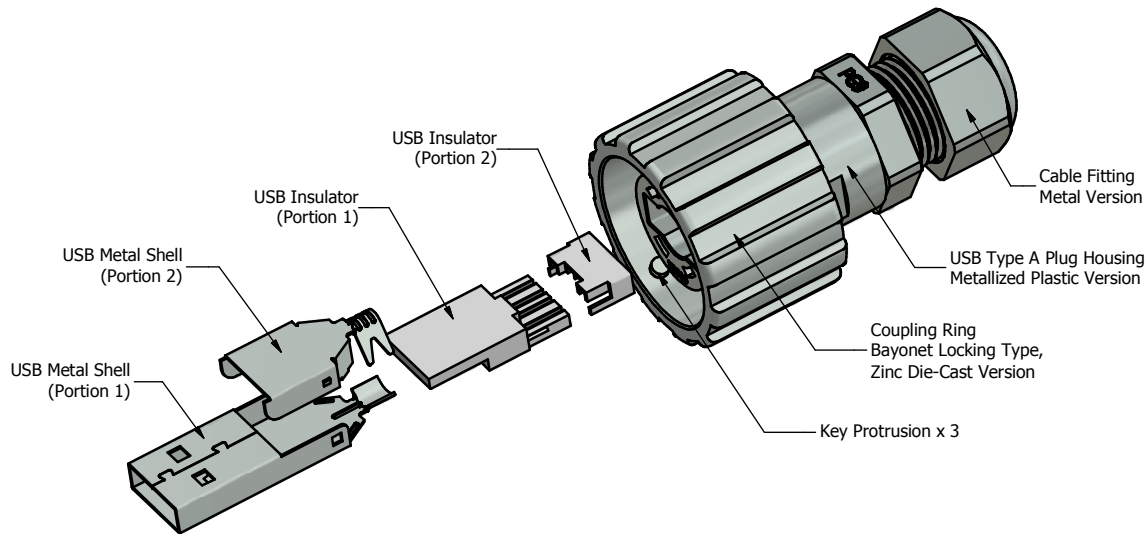

Notes:

1. Electrical Specifications:

- Meets USB 2.0 Specification
- Contact Resistance: 30 mOhm max.
- Insulation Resistance: 1000 MOhm min. @ 100 VDC
- Current Rating: 1.5 A max. at 25°C
- Working Voltage: 30 V (RMS) max.
- DWV: 500 VAC/60s at sea Level
- Operating Temperature: -40°C to +85°C

2. Material and Finish:

- Coupling Ring: Zinc Die-Cast, Nickel Plated
- USB Plug Housing: ABS, Nickel Plated, UL94 V-0
- Interfacial Seal: Silicon, Color: White
- Cable Fitting: Brass, Nickel Plated, UL94 V-0
- Cable Fitting Rubber Ring: NBR, Color: Black
- USB Metal Shell: SPCC, Nickel Plated
- USB Insulator: PBT, UL94 V-0, White
- USB Contacts: Copper Alloy,
- USB Contact Finish: 30 u" Gold min. over Nickel for mating area, Tin over Nickel for solder cup

© 3. USB Type A Plug accepts AWG28 to AWG24 wires, Cable OD of 4.0 mm to 5.5 mm

4. IP67 rated when fully mated with the appropriate mating connector

RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.				Customer:		Tolerance Unless otherwise specified			Scale: 1.5:1	Dim. in mm
				Name	Title	Approval Date			Material: See Notes	
DO NOT ALTER CAD DRAWING BY HAND Rev. Changes Date Name	e	1 x e	Apr/21/2017	Vincent Ke	Draw.	Mar. 16	Vincent Ke		Title: Die-Cast IP67 USB Plug Kit with USB 2.0 Type A Plug (Solder Cup) Nickel Plated Zinc Die-Cast Version	
	d	1 x d	Apr/21/2017	Vincent Ke	Appd.	Mar. 16	J. Chaudry			
	c	1 x c	Jun/23/1024	Vincent Ke	Norm				Drawing No.: 17K1A154 Part No.: 17-200591	
	b	1 x b	Jan/28/2011	Vincent Ke	D-old					
	a	original							Drawing No.: 17K1A154 Part No.: 17-200591	
	Rev.	Changes	Date	Name						

CONEC®

A

Sheet 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[17-200591](#)