

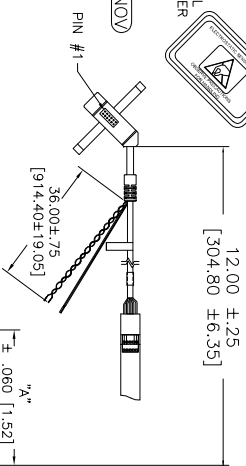


OGA DIAGONAL: 11.62 [295.18]
VA DIAGONAL: 10.84 [275.46]
PA DIAGONAL: 10.25 [260.26]

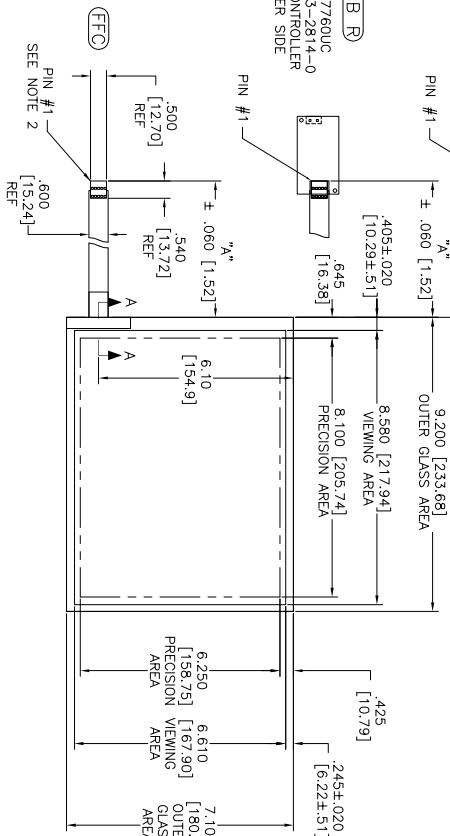

(SER)
EXII-7720SC
98-0003-2217-6
SERIAL CONTROLLER
SOLDER SIDE

(USB R)
EXII-7760UC
98-0003-2814-0
USB CONTROLLER
SOLDER SIDE



.147 ± .020 [3.73 ± .51]
TOTAL THICKNESS
OF GLASS, CABLE
AND STRAIN RELIEF

- NOTES:
1. WEIGHT OF GLASS IN GRAMS: 32.1 ± 10%
 2. NICOOMATIC HOUSING P/N: 0L05
 3. NICOOMATIC RECEPTACLES (PINS) MATTE TIN PLATED P/N: 14106-12
 4. HOUSING ORIENTED WITH LATCH DOWN

UNITS	INCHES [MM]
PINOUT	
1 LR	
2 LL	
3 SHED	
4 UL	
5 UR	

TOP LEVEL NUMBER	US NUMBER	TYPE	DM "A" (TOTAL GLASS TO CONNECTOR)	A/G FINISH	PROD SPEC
17-8021-203	98-0003-2503-9	FEC	4.27" [108.46]	AG500	23655
17-8021-205	98-0003-2504-7	FEC	8.00" [203.20]	AG500	23655
17-8021-206	98-0003-2505-4	NOV	SEE DWG	AG500	23655
17-8021-221	98-0003-2507-0	SFR	4.27" [108.46]	AG500	23655
17-8021-227	98-0003-2510-4	SFR	8.00" [203.20]	AG500	23655
17-8021-218	98-0003-2916-3	USB R	4.27" [108.46]	AG500	23655
17-8021-226	98-0003-2509-6	USB R	8.00" [203.20]	AG500	23655

UNITS: INCHES [MM]

TOLERANCES UNLESS OTHERWISE SPECIFIED

X ± .03 [.76]

.XXX ± .015 [.38]

ANGLES ± 1°

THIRD ANGLE PRACTICE

3M TOUCH SYSTEMS
3M TOUCH, WA
USA

THIS DOCUMENT IS COPYRIGHTED PROPERTY OF THE 3M COMPANY. IT IS TO BE USED FOR THE PURPOSES SPECIFIED ONLY AND NOT TO BE REPRODUCED OR USED FOR ANY OTHER PURPOSES WITHOUT THE WRITTEN PERMISSION OF THE 3M COMPANY.

REV	DATE	CHANGED BY	REASON
H	4/13	SB	REVISED PER CO 036256
G	9/11	SEB	REVISED PER CO 033533
F	8/11	SB	REVISED PER CO 033455

MARKETING DRAWING
SCT32NN 10.84"

DO NOT SCALE DRAWING

SCALE 1" = 1"

DRAWN K. CROWLEY 9/05

CAD FORMAT AUTOCAD

SHEET 1 OF 1

DOCUMENT NO. 28209-MKT

REV H

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

3M:

[17-8021-205](#)