

DETAILS


Product Number	CA12584_LXB2-RS2
Family	Leila
Type	Assembly
Color	black
Diameter	21.6 mm
Height	14,6 mm
Style	round
Optic Material	PMMA
Holder Material	PC
Fastening	tape
Status	ready
ROHS Comliant	Yes
Date Updated	18/06/2012




OPTICAL PROPERTIES

LED	Viewing	Light	Effi-	cd/lm	Connector
	Angle	Beam	ciency		
XB-D	9 deg	RS2-class	85 %	21.000	-
XB-H	10 deg	RS2-class	87 %	19.900	-

Relative intensity of CA12584_LXB2-RS2_(XB-H)

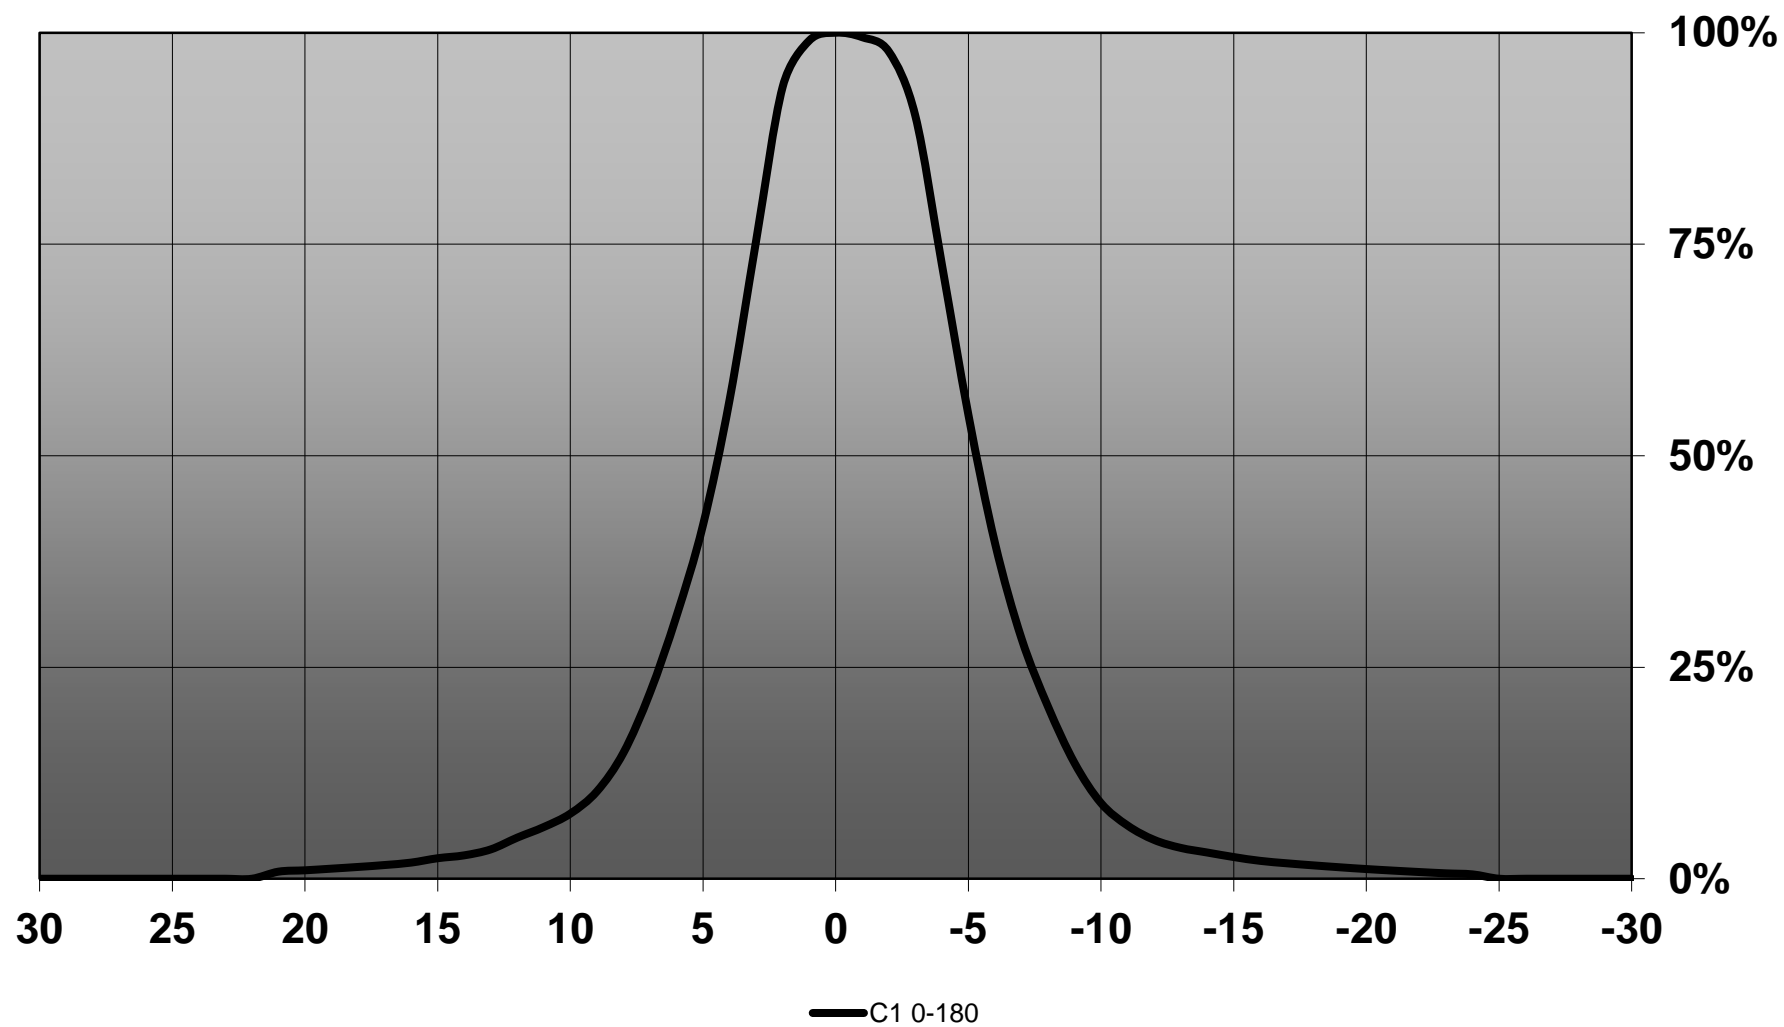

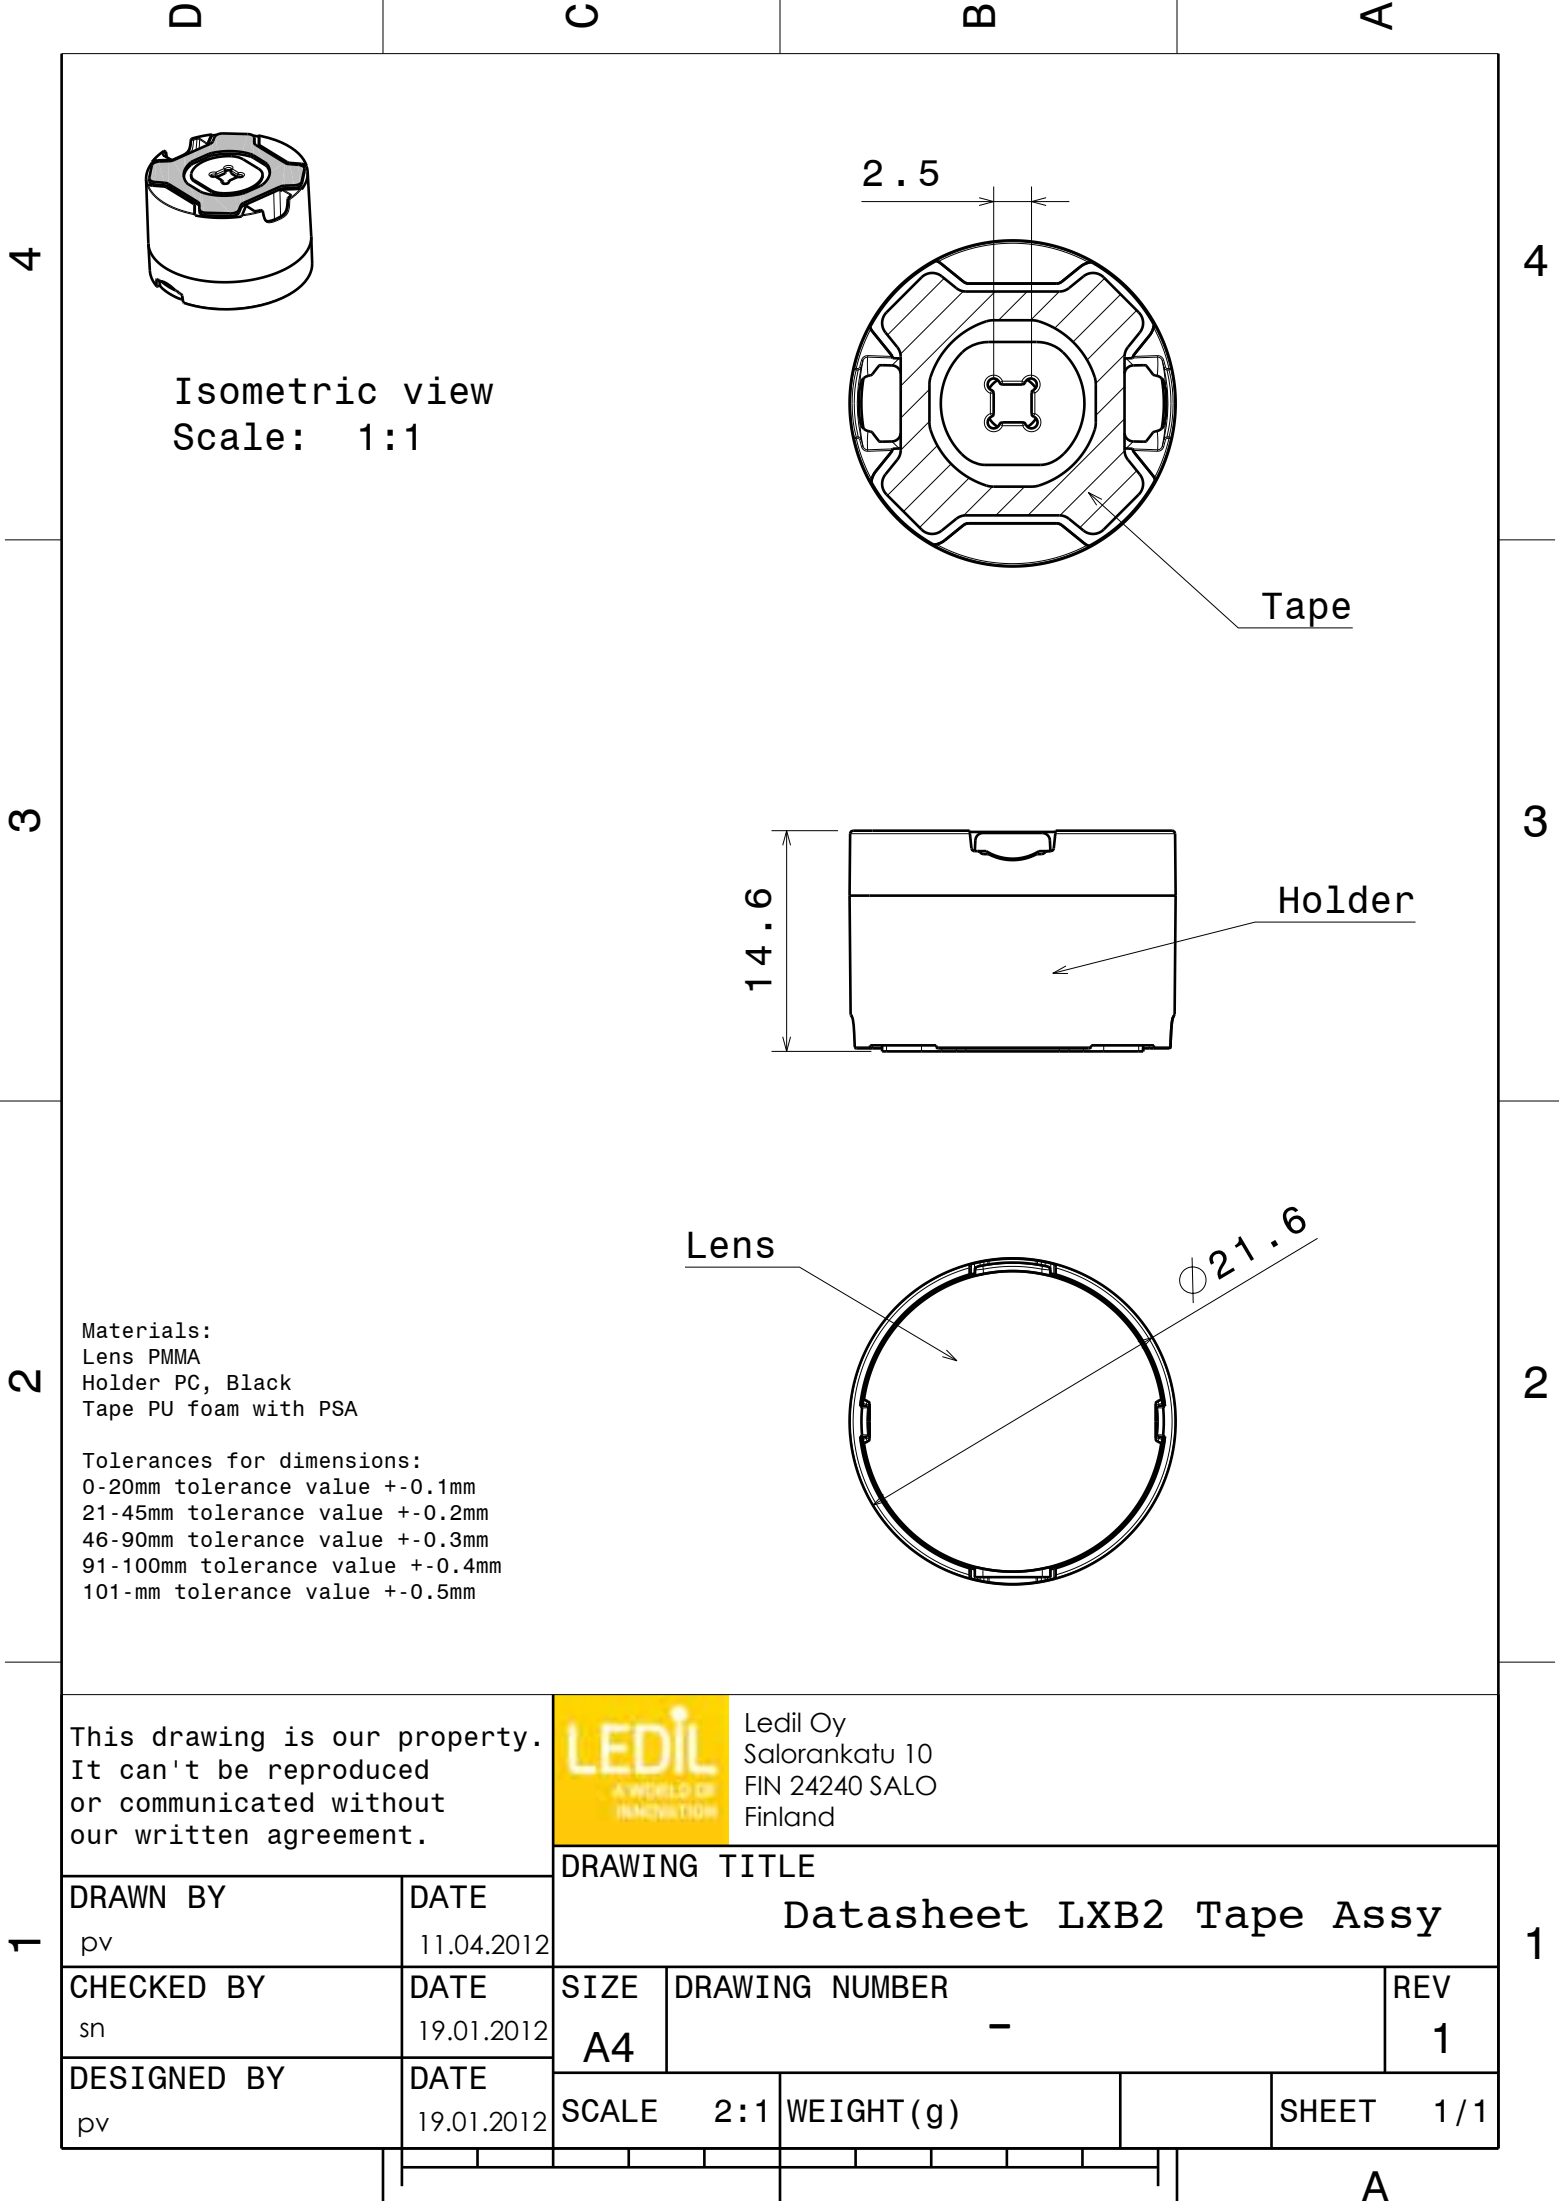

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.




Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE
Datasheet LXB2 Tape Assy

DRAWN BY pv	DATE 11.04.2012
CHECKED BY sn	DATE 19.01.2012
DESIGNED BY pv	DATE 19.01.2012

SIZE A4	DRAWING NUMBER -	REV 1
SCALE 2 : 1	WEIGHT (g)	SHEET 1 / 1

Luminaire: Ledil Oy CA12584_LXB2-RS2 Efficiency=85%
Lamps: 1 x Cree XB-D warm (84lm @ 250mA)

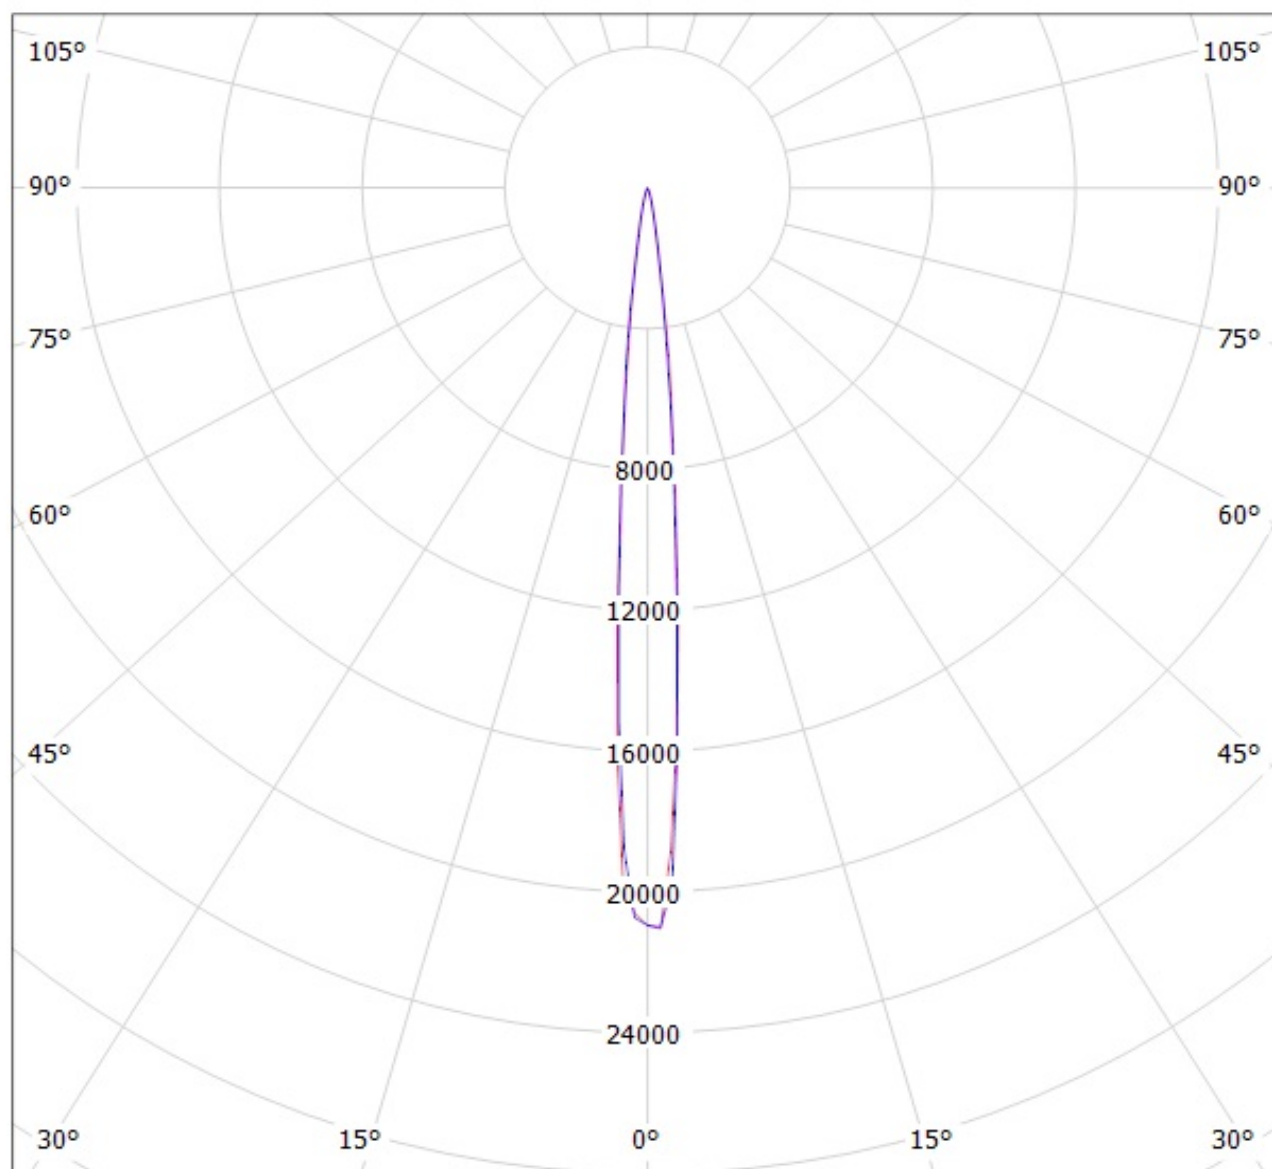

cd/klm

— C0 - C180

— C90 - C270

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Fastening to heat sink with a PU foam adhesive tape of automotive grade. Please find fastening details by clicking link: http://www.ledil.com/datasheets/DataSheet_TAPE.pdf

NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the tape.

NOTE 2: Assembly to the surface must be made straight, so the tape bonds constant and balanced with fastening surface. Slanted assembly might cause unbalanced bond to the surface. All surfaces where tape is applied must be clean, dry and free from grease and dirt.

If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer - this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.

Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.