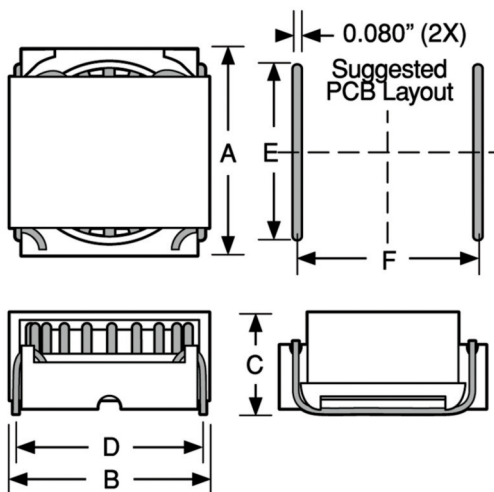


SERIES**HCTR
HCT****High Current Toroidal Inductors**Actual Size
(HCT-44X)**Physical Parameters:**

Package	A Max.	B Max.	C Max.	D	E	F
HCT-37X	0.615	0.600	0.370	0.500	0.440	0.500
HCT-44X	0.665	0.665	0.400	0.560	0.490	0.560
HCT-50X	0.740	0.740	0.400	0.630	0.560	0.630
HCT-68X	0.945	0.940	0.400	0.820	0.700	0.820

Above dimensions in inches and unless otherwise stated all tolerances are ± 0.010 **Mechanical Configuration**

Units are surface mount, low profile, self-leaded devices

Frequency Range 1kHz up to 1 MHz**Operating Temperature Range** -30°C to $+130^{\circ}\text{C}$ **Leads** Solder tinned**Materials** Meet UL94V-0**Optional Tolerances** As low as 10% available on some values.**Consult factory for details.****Maximum Power Dissipation at 25°C Ambient**

HCT-37x, 0.9 W

HCT-44x, 1.0 W

HCT-50x, 1.1 W

HCT-68x, 1.2 W

Marking API; part number.

Example: HCT-504

API


HCT-504

Packaging Bulk; contact factory for tape & reel options.**ELECTRICAL SPECIFICATIONS @ 25°C** **DC AMPS TO PRODUCE A MAXIMUM
TEMPERATURE RISE FROM 25°C AMBIENT**

DASH NUMBER*	INDUCTANCE (μH) $\pm 25\%$	Q TYPICAL	L & Q TEST FREQUENCY (kHz)	SRF (MHz, TYPICAL)	DC RESISTANCE MAXIMUM (m Ω)	DC RESISTANCE TYPICAL (m Ω)	5 $^{\circ}\text{C}$	15 $^{\circ}\text{C}$	25 $^{\circ}\text{C}$	35 $^{\circ}\text{C}$	45 $^{\circ}\text{C}$	55 $^{\circ}\text{C}$
-371	1.25	32	100	260	2.5	2.2	5.73	9.75	12.30	14.30	16.00	17.40
-372	2.1	27	100	160	4.0	3.4	4.58	7.78	9.87	11.40	12.80	13.90
-373	2.8	27	100	110	6.3	5.4	3.62	6.17	7.82	9.10	10.10	11.00
-374	4.2	24	100	100	7.9	6.8	3.23	5.49	6.97	8.10	9.04	9.83
-441	2.8	33	100	110	3.6	3.2	5.13	8.73	11.00	12.80	14.30	15.60
-442	4.2	29	100	85	5.4	4.7	4.23	7.20	9.14	10.60	11.80	12.80
-443	5.7	29	100	65	7.5	6.4	3.60	6.13	7.78	9.05	10.00	10.90
-444	9.0	26	100	55	11.4	9.8	2.91	4.95	6.28	7.31	8.15	8.87
-501	6.5	25	100	55	6.6	5.8	3.97	6.75	8.56	9.96	11.10	12.00
-502	8.4	23	100	45	8.3	7.2	3.55	6.04	7.66	8.91	9.94	10.80
-503	12.5	23	100	35	11.4	9.8	3.04	5.17	6.56	7.63	8.50	9.25
-504	17.0	22	100	29	17.0	14.6	2.49	4.23	5.37	6.25	6.97	7.58
-681	10.5	35	100	30	6.2	5.3	4.35	7.40	9.39	10.90	12.10	13.20
-682	17.6	35	100	24	12.3	10.7	3.06	5.21	6.60	7.68	8.57	9.32
-683	22.0	30	100	21	17.5	15.0	2.58	4.40	5.58	6.49	7.24	7.87
-684	29.0	30	100	16	25.0	21.5	2.16	3.67	4.66	5.42	6.04	6.57

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com

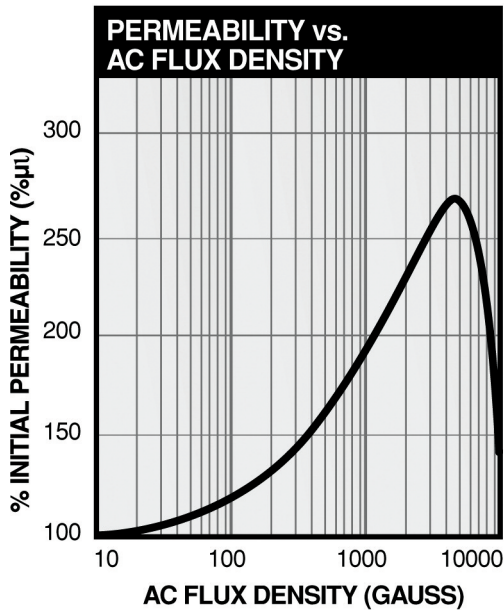SERIES**HCTR
HCT**RoHS
Compliant
Traditional
First Quality**High Current Toroidal Inductors****For frequencies ≤ 10 kHz**

$$\begin{array}{lll} \text{(mW/cm}^3\text{)} & \text{Hz} & \text{Gauss} \\ \text{Core loss} = & 1.47 \times 10^{-8} & f^{0.971} B^{2.11} \end{array}$$

For frequencies ≥ 10 kHz

$$\begin{array}{lll} \text{(mW/cm}^3\text{)} & \text{Hz} & \text{Gauss} \\ \text{Core loss} = & 9.07 \times 10^{-10} & f^{1.26} B^{2.11} \end{array}$$

$$B_{pk} = \frac{E_{rms} 10^8}{4.44 A n f}$$


A:

$$\begin{array}{ll} T37 = 0.064 \text{ cm}^2; & T44 = 0.099 \text{ cm}^2; \\ T50 = 0.112 \text{ cm}^2; & T68 = 0.179 \text{ cm}^2 \end{array}$$

This information is intended to be used in assisting the designer in part selection. Each application may contain other variables which must be considered in part selection, such as temperature effects, waveform distortion, etc. API Delevan Sales/Engineering is available to provide information as needed to fit each application.

Data is representative of a DC current with less than 1% ripple and an AC waveform less than: 50 gauss on the HCT-37X, 25 gauss on the HCT-44X, 15 gauss on the HCT-50X and 10 gauss on the HCT-68X. The effect of AC or ripple flux can be significant in many DC inductor applications. When significantly greater AC flux density is present, it becomes necessary to consider its effect on both core loss and permeability (inductance).

All data points, on the above graphs, that exceed the rated DC current specified for a 55°C rise from a 25°C ambient are for design reference only and are not intended to imply continuous use at those DC current levels.

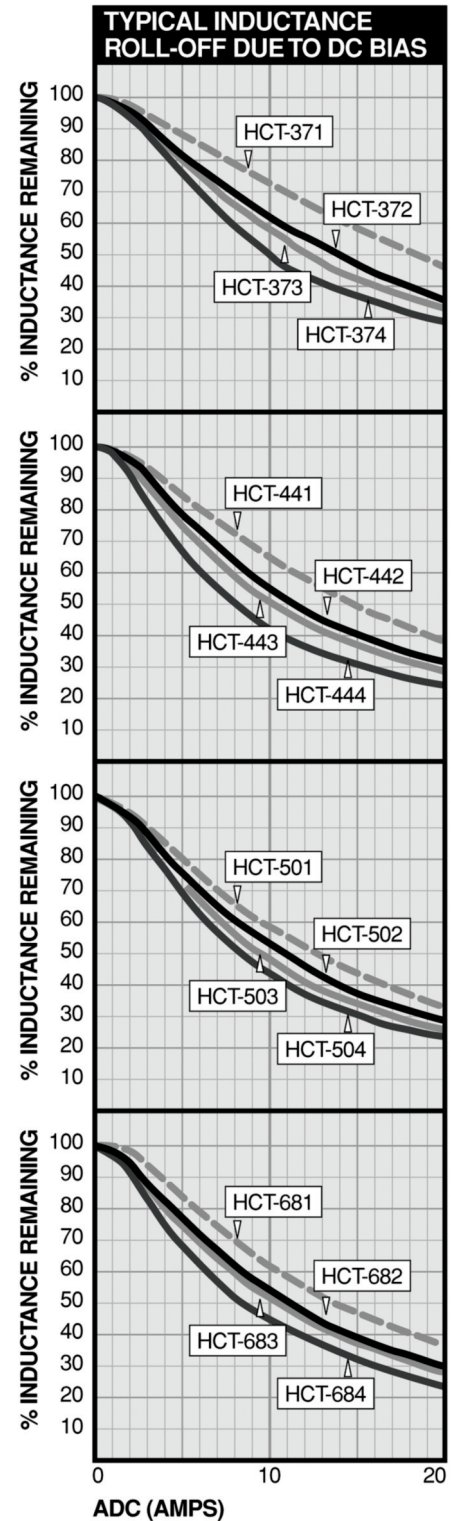

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[HCT-371](#) [HCT-372](#) [HCT-373](#) [HCT-374](#) [HCT-441](#) [HCT-442](#) [HCT-443](#) [HCT-444](#) [HCT-501](#) [HCT-502](#) [HCT-503](#)
[HCT-504](#) [HCT-681](#) [HCT-682](#) [HCT-683](#) [HCT-684](#) [HCTR-371](#) [HCTR-372](#) [HCTR-373](#) [HCTR-374](#) [HCTR-441](#) [HCTR-](#)
[442](#) [HCTR-443](#) [HCTR-444](#) [HCTR-501](#) [HCTR-502](#) [HCTR-503](#) [HCTR-504](#) [HCTR-681](#) [HCTR-682](#) [HCTR-683](#)
[HCTR-684](#)