


Inductive sensor BI4U-M12-AP6X-H1141




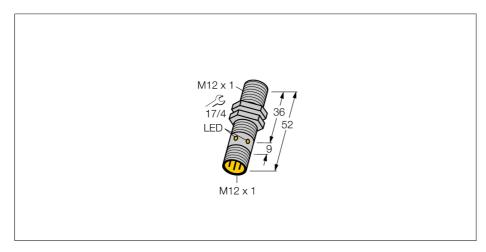

Туре	BI4U-M12-AP6X-H1141	
Ident-No.	1634804	
Rated operating distance Sn	4 mm	
Mounting condition	flush	
Assured sensing range	≤ (0,81 x Sn) mm	
Repeatability	≤ 2 %	
Temperaturdrift	10 %	
•	\leq ± 15 %, \leq -25 °C v \geq +70 °C	
Hysteresis	315 %	
Ambient temperature	-30+85 °C	
Operating voltage	1030VDC	
Residual ripple	≤ 10 % U _{**}	
DC rated operational current	≤ 200 mA	
No-load current I _o	≤ 15 mA	
Residual current	≤ 0.1 mA	
Rated insulation voltage	≤ 0.5 kV	
Short-circuit protection	yes/ cyclic	
Voltage drop at I _e	≤ 1.8 V	
Wire breakage / Reverse polarity protection	ves/ complete	
Output function	3-wire, NO contact, PNP	
Protection class		
Switching frequency	2 kHz	
Design	threaded barrel, M12 x 1	
Dimensions	52 mm	

- Threaded barrel, M12 x 1
- Chrome-plated brass
- Factor 1 for all metals
- Protection class IP68
- Magnetic field immune
- High switching distance
- Recessed mounting possible
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 connector

Wiring diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. Due to the patented multi-coil system, *Uprox*®+ sensors have distinct advantages compared to conventional sensors. They excel in highest switching distances, maximum flexibility and operational reliability as well as efficient standardization.

Housing material

Connection

MTTF

Material active face

Vibration resistance

Shock resistance

Protection class

Switching state

Max. tightening torque housing nut

874years acc. to SN 29500 (Ed. 99) 40 $^{\circ}\text{C}$

Metal, CuZn, chrome-plated Plastic, LCP-GF30

connector, M12 x 1

55 Hz (1 mm)

30 g (11 ms)

LED yellow


10 Nm




Inductive sensor BI4U-M12-AP6X-H1141




Mounting instructions	minimum distances	
Distance D	24 mm	
Distance W	12 mm	
Distance T	36 mm	
Distance S	18 mm	
Distance G	24 mm	
Diameter of the active area B	Ø 12 mm	





Flush and recessed mounting of all *uprox*®+ threaded barrel sensors. Safe operation is ensured if the sensor is screwed in by half a turn.







Accessories

Type code	Ident-No.	Short text	Dimension drawing
PN-M12	6905309	Impact protection nut for M12x1 threaded barrel devices; material: Stainless steel A2 1.4305 (AISI 303)	S17 M12 x 1 o 19
QM-12	6945101	Quick-mount bracket with dead-stop; material: Chrome-plated brass Male thread M16 x 1. Note: The switching distance of proximity switches can be reduced by the use of quick-mount brackets.	22/4 22/4 19.5 34
BST-12B	6947212	Fixing clamp for threaded barrel devices, with dead-stop; material: PA6	M5 28 40 18 18 18 18 18 18 18 18 18 18 18 18 18
MW-12	6945003	Mounting bracket for threaded barrel devices; material: Stainless steel A2 1.4301 (AISI 304)	9,5 19,1 38,1 14,3 34,8
BSS-12	6901321	Mounting bracket for smooth and threaded barrel devices; material: Polypropylene	1,8 7,9