
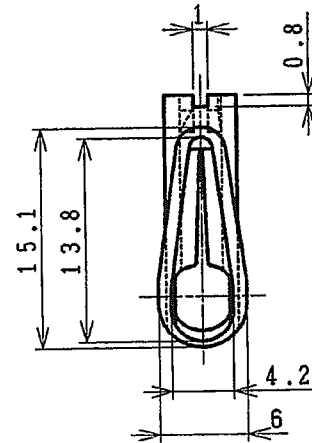
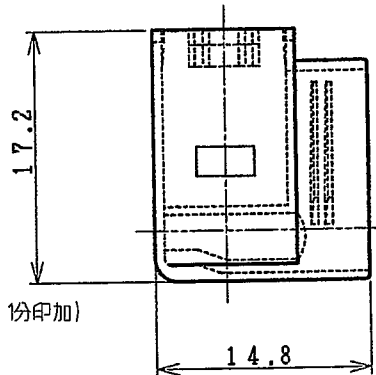


| LOC | DIST | REVISIONS |     |                           |  | DATE    | DWN | APVD |
|-----|------|-----------|-----|---------------------------|--|---------|-----|------|
| J   | —    | P         | LTR | DESCRIPTION               |  |         |     |      |
|     |      | P         |     | REVISED PER ECO-11-005030 |  | 24MAR11 | RK  | HMR  |

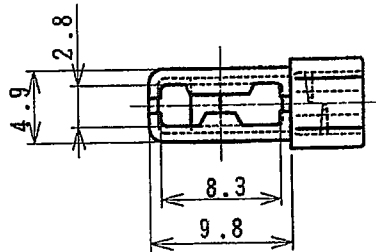

## 注記 ;

1. 本製品は射出成形品である
2. 一般公差 :  $\pm 0.3$
3. 適用コンタクト型番 : 175057
4. 温度範囲 : TABLE 1 参照
5. 初期絶縁抵抗 : 5000M $\Omega$ 以上 (DC500V 1分印加)
6. 初期耐電圧  
耐電圧 : AC2.5KV 1分印加  
破壊電圧 : AC3.3KV以上
7. スリーブの再使用は原則として禁止
8. 本製品に関する適用製品規格は用意しておりません。製品の使用に際しては、適用性について御確認の上決定下さい。


## NOTES ;

1. THIS PARTS ARE INJECTION MOLDING ITEM
2. GENERAL TOLERANCE :  $\pm 0.3$
3. APPLICABLE RECEPTACLE P/N : 175057
4. TEMPERATURE LIMIT : SEE TABLE 1
5. INITIAL INSULATION RESISTANCE : 5000M $\Omega$  MIN. (DC500V FOR 1MINUTE)
6. INITIAL DIELECTRIC WITHSTAND VOLTAGE  
DIELECTRIC WITHSTAND VOLTAGE : AC2.5KV FOR 1MINUTE.  
PUNCTURE VOLTAGE : AC3.3KV MIN.
7. AS A RULE, REUSABILITY IS NOT ACCEPTABLE
8. THIS PRODUCT IS NOT PREPARED THE PRODUCT SPECIFICATION. THEREFORE, PLEASE USE THIS PRODUCT AFTER CONSIDERING THE APPLICABILITY OF THIS PRODUCT.

TABLE 1

| 温度範囲<br>TEMPERATURE LIMIT             | P/N 1717268-1 | P/N 1717268-2 |
|---------------------------------------|---------------|---------------|
| 使用温度範囲<br>OPERATING TEMPERATURE LIMIT | -40℃~105℃     | -40℃~60℃      |
| 保管温度範囲<br>STORAGE TEMPERATURE LIMIT   | -40℃~50℃      | -40℃~50℃      |
| 作業温度範囲<br>WORKING TEMPERATURE LIMIT   | 5℃~50℃        | 5℃~50℃        |

|             |                              |           |
|-------------|------------------------------|-----------|
| 黄<br>YELLOW | PVC(軟質)<br>PVC(SOFT) UL94V-0 | 1717268-2 |
| 青<br>BLUE   | PVC(軟質)<br>PVC(SOFT) UL94V-0 | 1717268-1 |
| 色<br>COLOR  | 材料<br>MATERIAL               | 型番<br>P/N |

DIMENSIONS:  
単位 : 特  
MMTOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
一般公差

|                            |           |
|----------------------------|-----------|
| DWN<br>T.HATANO            | 06MAY2003 |
| CHK<br>N.YAMASAKI          | 06MAY2003 |
| APVD<br>M.SHINDO           | 06MAY2003 |
| PRODUCT SPEC<br>製品規格       |           |
| APPLICATION SPEC<br>取付適用規格 |           |
| WEIGHT                     |           |

MATERIAL  
材料

SEE TABLE

FINISH  
仕上

TE Connectivity

NAME  
名称INSULATION SLEEVE INJECTION TYPE  
FOR 250 SERIES FLAG POSITIVE LOCK EX REC.

SIZE

CAGE CODE

DRAWING NO  
番号

RESTRICTED TO

A4

00779

C-1717268

CUSTOMER DRAWING

SCALE  
尺度 2:1

SHEET 1 OF 1

REV P

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1717268-1](#)