


Intellimod™ L1-Series


Three Phase
IGBT Inverter + Brake
150 Amperes/1200 Volts

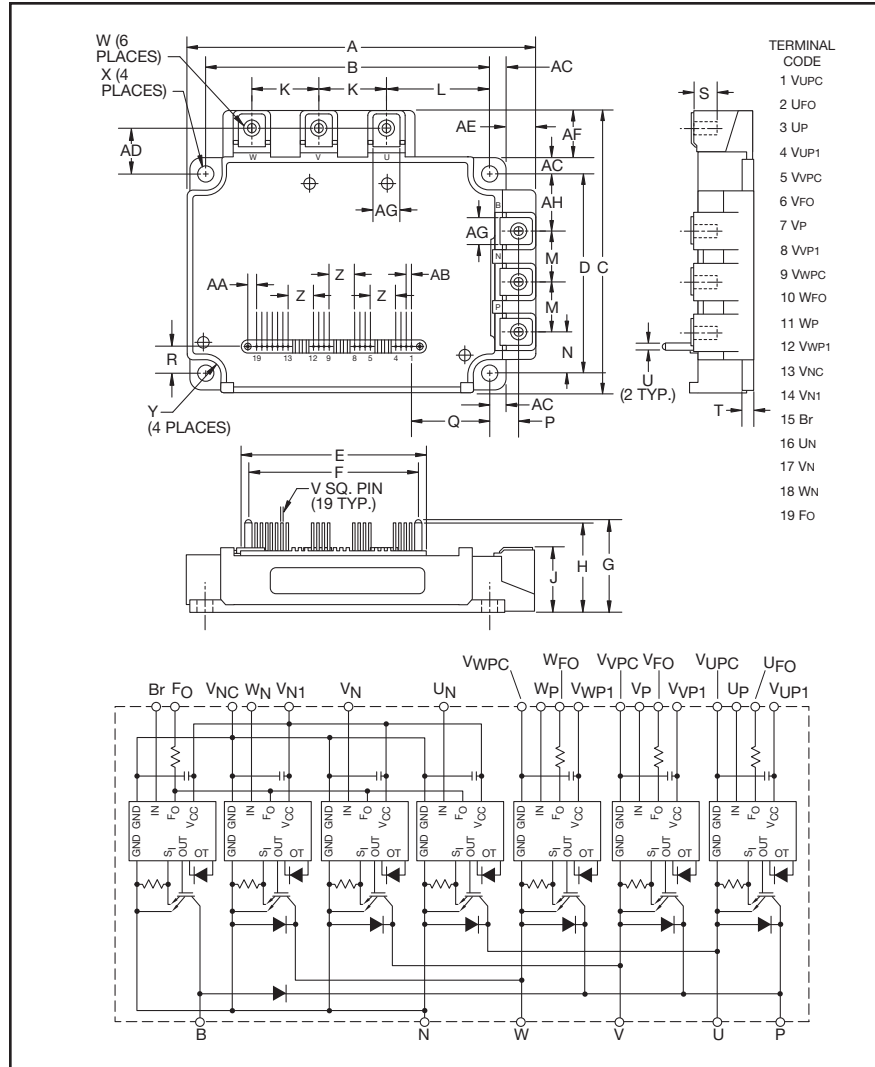

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.31	135.0
B	4.33±0.02	110±0.5
C	4.33	110.0
D	3.07	78.0±0.5
E	2.81	71.5
F	2.62	66.5
G	1.37	34.7
H	1.32	33.6
J	0.95+0.04/-0.01	24.1+1.0/-0.5
K	1.02	26.0
L	1.59	40.5
M	0.79	20.0
N	0.65	16.5
P	0.43±0.01	11.0±0.3
Q	1.19	30.15
R	0.43	11.0

Dimensions	Inches	Millimeters
S	0.51	13.0
T	0.16	4.0
U	0.1 Dia.	Dia.2.5
V	0.02 Sq.	Sq. 0.5
W	M5 Metric	M5
X	0.22 Dia.	Dia. 5.5
Y	0.24 Rad.	Rad. 6
Z	0.39	10.0
AA	0.13	3.25
AB	0.08	2.0
AC	0.24	6.05
AD	0.71	18.0
AE	0.46	11.7
AF	0.74	18.7
AG	0.41	10.5
AH	0.85	21.5

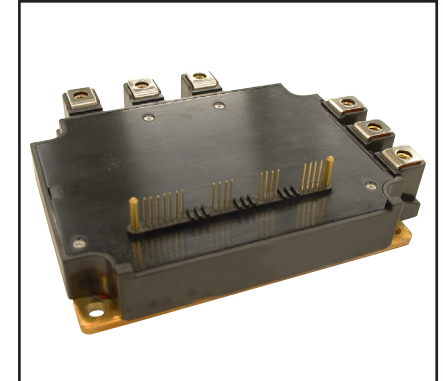

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Temperature Using On-chip Temperature Sensing
 - Under Voltage
- ☐ Low Loss Using Full Gate CSTBT™ IGBT Chip

Applications:

- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM150RL1A120 is a 1200V, 150 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V _{CES} Volts (x 10)
PM	150	120

PM150RL1A120

Intellimod™ L1-Series

Three Phase IGBT Inverter + Brake

150 Amperes/1200 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM150RL1A120	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	380	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	1000	Volts
Self-protection Supply Voltage Limit (Short Circuit protection Capability)*	$V_{\text{CC(prot.)}}$	800	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	1200	Volts
Collector Current ($T_C = 25^\circ\text{C}$) (Note 1)	$\pm I_C$	150	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	300	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	833	Watts

IGBT Brake Sector


Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	1200	Volts
Collector Current ($T_C = 25^\circ\text{C}$) (Note 1)	$\pm I_C$	75	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	150	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	595	Watts
Diode Forward Current	I_F	75	Amperes
Diode Rated DC Reverse Voltage ($T_C = 25^\circ\text{C}$)	$V_{\text{R(DC)}}$	1200	Volts

Control Sector

Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{WP1}}-V_{\text{WPC}}$, $V_{\text{N1}}-V_{\text{NC}}$)	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , W_P-V_{WPC} , $U_N-V_N-W_N-Br-V_{\text{NC}}$)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, $W_{\text{FO}}-V_{\text{WPC}}$, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Current (U_{FO} , V_{FO} , W_{FO} , F_O Terminals)	I_{FO}	20	mA

* $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$

Note 1: T_C (under the chip) Measurement Point



Arm Axis	UP		VP		WP		UN		VN		WN		Br	
	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi
X	25.2	25.2	58.8	58.8	88.8	88.8	37.2	37.3	70.8	70.8	88.8	88.8	11.4	7.5
Y	57.1	46.8	57.1	46.80	57.1	46.8	28.4	38.6	28.4	38.6	28.4	38.6	28.0	60.8

PM150RL1A120
Intellimod™ L1-Series
Three Phase IGBT Inverter + Brake
150 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _D = 15V, V _{CIN} = 0V, I _C = 150A, T _j = 25°C	—	1.65	2.15	Volts
		V _D = 15V, V _{CIN} = 0V, I _C = 150A, T _j = 125°C	—	1.85	2.35	Volts
Diode Forward Voltage	V _{EC}	-I _C = 150A, V _{CIN} = 15V, V _D = 15V	—	2.3	3.3	Volts
Inductive Load Switching Times	t _{on}	V _D = 15V, V _{CIN} = 0 ⇔ 15V V _{CC} = 600V, I _C = 150A T _j = 125°C	0.3	0.8	2.0	μs
	t _{rr}		—	0.3	0.8	μs
	t _{C(on)}		—	0.4	1.0	μs
	t _{off}		—	1.2	2.8	μs
	t _{C(off)}		—	0.4	1.2	μs
Collector-Emitter Cutoff Current	I _{CES}	V _{CE} = V _{CES} , V _D = 15V, T _j = 25°C	—	—	1.0	mA
		V _{CE} = V _{CES} , V _D = 15V, T _j = 125°C	—	—	10	mA
IGBT Brake Sector						
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _D = 15V, V _{CIN} = 0V, I _C = 50A, T _j = 25°C	—	1.65	2.15	Volts
		V _D = 15V, V _{CIN} = 0V, I _C = 50A, T _j = 125°C	—	1.85	2.35	Volts
Forward Voltage	V _{FM}	I _F = 50A	—	2.3	3.3	Volts
Collector-Emitter Cutoff Current	I _{CES}	V _{CE} = V _{CES} , V _D = 15V, T _j = 25°C	—	—	1.0	mA
		V _{CE} = V _{CES} , V _D = 15V, T _j = 125°C	—	—	10	mA
Control Sector						
Circuit Current	I _D	V _D = 15V, V _{CIN} = 15V, V _{N1} -V _{NC}	—	8	16	mA
		V _D = 15V, V _{CIN} = 15V, V _{XP1} -V _{XPC}	—	2	4	mA
Input ON Threshold Voltage	V _{th(on)}	Applied between U _P -V _{UPC} ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	V _{th(off)}	V _P -V _{VPC} , W _P -V _{WPC} , U _N - V _N - W _N -Br-V _{NC}	1.7	2.0	2.3	Volts
Short Circuit Trip Level	SC	Inverter Part	300	—	—	Amperes
(-20°C ≤ T _j ≤ 125°C, V _D = 15V)		Brake Part	150	—	—	Amperes
Short Circuit Current Delay Time	t _{off(SC)}	V _D = 15V	—	0.2	—	μs
Over Temperature Protection	OT	Trip Level	135	—	—	°C
(Detect T _j of IGBT Chip)	OT _(hys)	Reset Level	—	20	—	°C
Supply Circuit Under-voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
(-20 ≤ T _j ≤ 125°C)	UV _R	Reset Level	—	12.5	—	Volts
Fault Output Current*	I _{FO(H)}	V _D = 15V, V _{CIN} = 15V	—	—	0.01	mA
	I _{FO(L)}	V _D = 15V, V _{CIN} = 15V	—	10	15	mA
Fault Output Pulse Width*	t _{FO}	V _D = 15V	1.0	1.8	—	ms

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower arm device operates to protect it.

PM150RL1A120
Intellimod™ L1-Series
Three Phase IGBT Inverter + Brake
150 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
-----------------	--------	-----------------	------	------	------	-------

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	IGBT (Per 1 Element) (Note 1)	—	—	0.15*	$^\circ\text{C/Watt}$
Inverter Part	$R_{th(j-c)D}$	FWDi (Per 1 Element) (Note 1)	—	—	0.23*	$^\circ\text{C/Watt}$
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	IGBT (Note 1)	—	—	0.21*	$^\circ\text{C/Watt}$
Brake Part	$R_{th(j-c)D}$	FWDi (Note 1)	—	—	0.36*	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied (Note 1)	—	—	0.027	$^\circ\text{C/Watt}$

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 800	Volts
Control Supply Voltage**	V_D	Applied between V_{UP1} - V_{UPC} , V_{VP1} - V_{VPC} , V_{WP1} - V_{WPC} , V_{N1} - V_{NC}	15.0 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between U_P - V_{UPC} ,	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	V_P - V_{VPC} , W_P - V_{WPC} , U_N - V_{NC} , W_N - Br - V_{NC}	≥ 9.0	Volts
PWM Input Frequency	f_{PWM}	—	≤ 20	kHz
Arm Shoot-through Blocking Time	t_{DEAD}	Input Signal	≥ 2.5	μs

* If you use this value, $R_{th(f-a)}$ should be measured just under the chips.










** With ripple satisfying the following conditions: dv/dt swing $\leq \pm 5V/\mu\text{s}$, Variation $\leq 2V$ peak to peak.

PM150RL1A120

Intellimod™ L1-Series

Three Phase IGBT Inverter + Brake

150 Amperes/1200 Volts

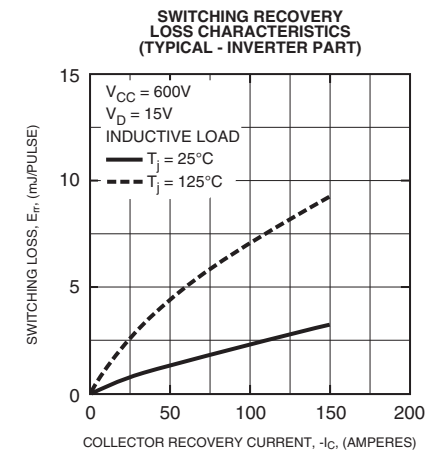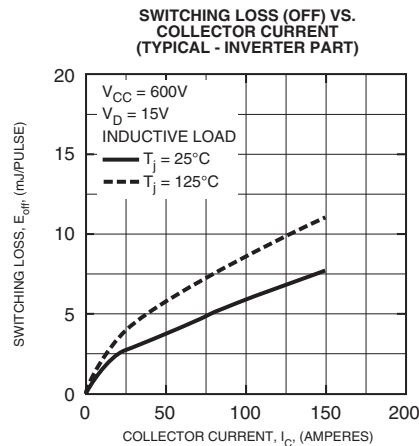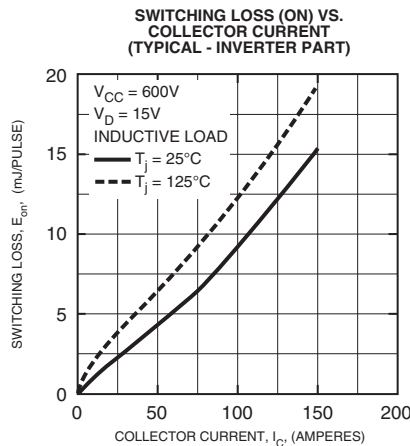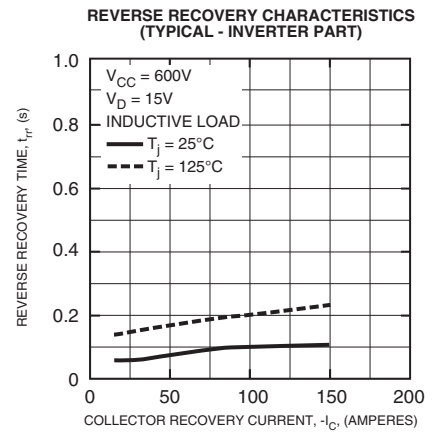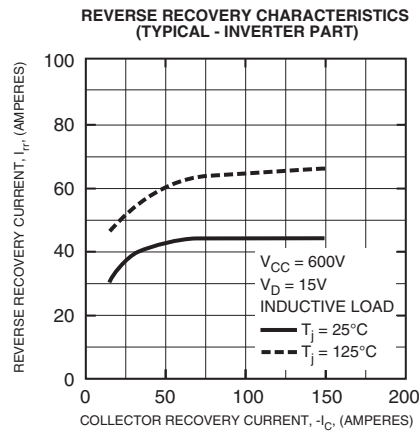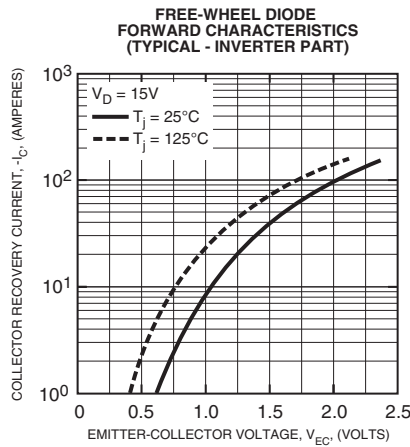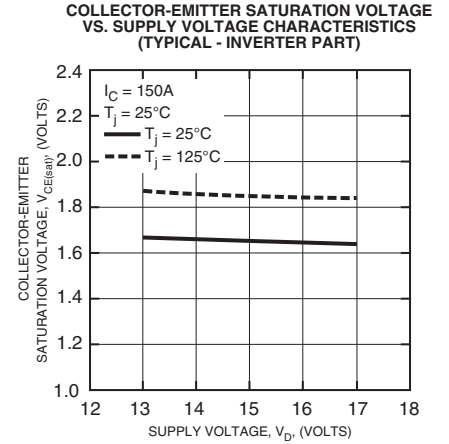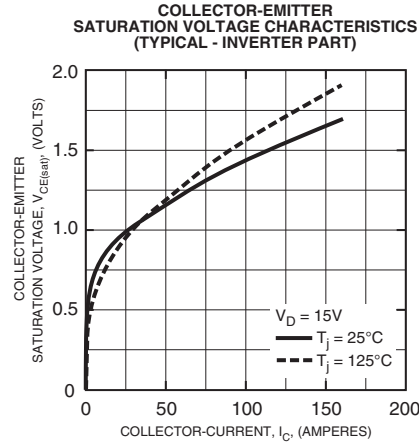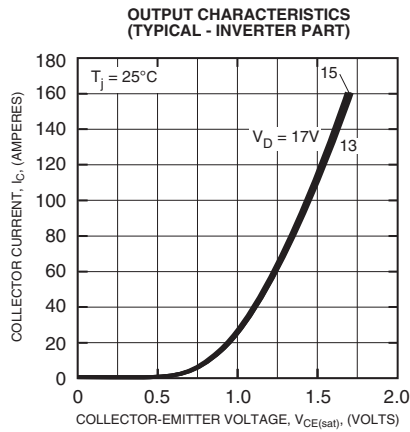


PM150RL1A120

Intellimod™ L1-Series


Three Phase IGBT Inverter + Brake

150 Amperes/1200 Volts


SWITCHING TIME (ON) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

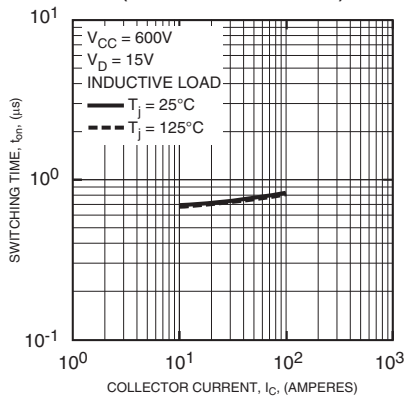


SWITCHING TIME (OFF) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

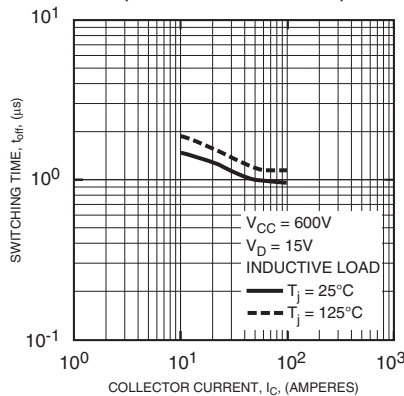


SWITCHING TIME (ON) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

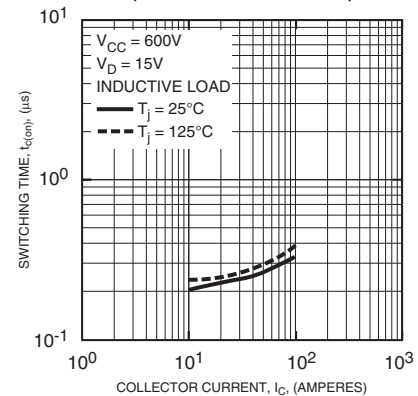


SWITCHING TIME (OFF) VS.
COLLECTOR CURRENT
(TYPICAL - INVERTER PART)

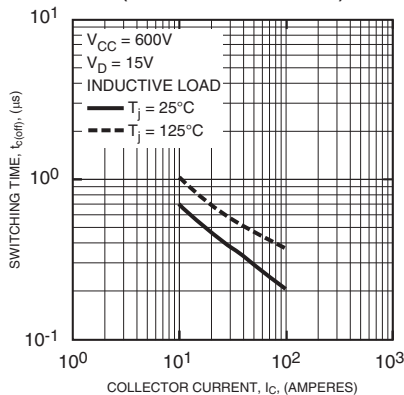


CIRCUIT CURRENT VS.
CARRIER FREQUENCY CHARACTERISTICS
(N-SIDE - INVERTER PART)

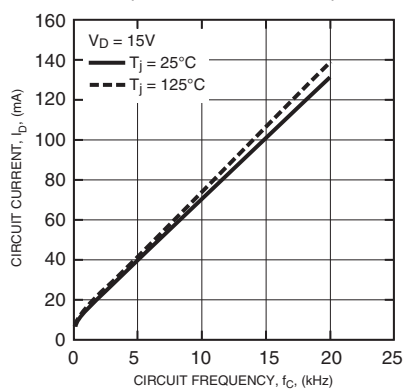


CIRCUIT CURRENT VS.
CARRIER FREQUENCY CHARACTERISTICS
(P-SIDE - INVERTER PART)

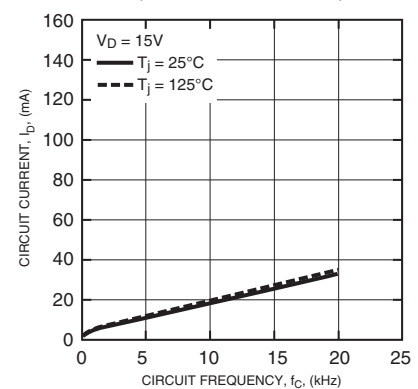


SUPPLY CIRCUIT UNDER-VOLTAGE
PROTECTION CHARACTERISTICS
(TYPICAL - INVERTER PART)

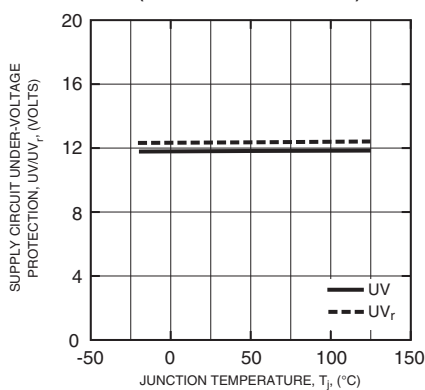

SHORT CIRCUIT TRIP LEVEL
CHARACTERISTICS
(TYPICAL - INVERTER PART)

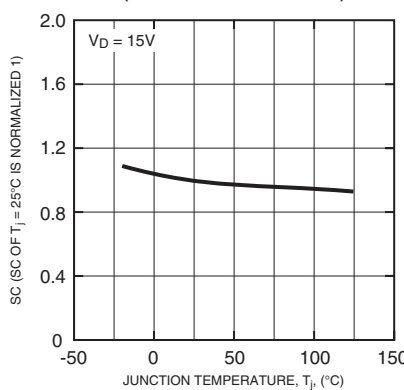

TRANSIENT THERMAL
IMPEDANCE CHARACTERISTICS
(IGBT & FWDI - INVERTER PART)

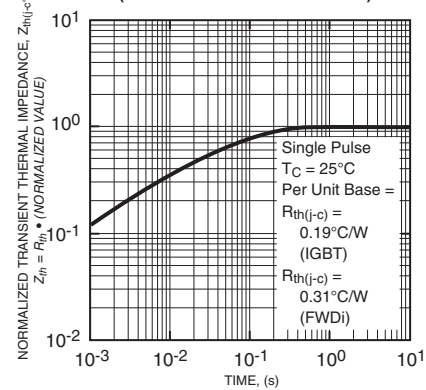

PM150RL1A120

Intellimod™ L1-Series

Three Phase IGBT Inverter + Brake

150 Amperes/1200 Volts

