




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECR-10-019377	30SEP2010	HMR	T.M
	C	REVISED PER ECR-14-000206	26DEC2013	DR	RB

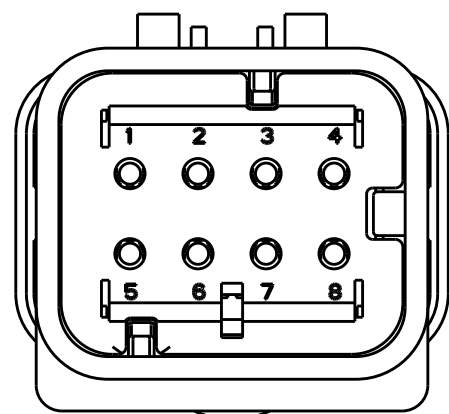


1717676-2
SCALE 2:1

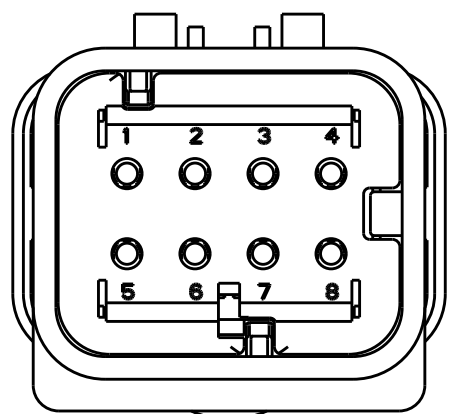

1717676-3
SCALE 2:1

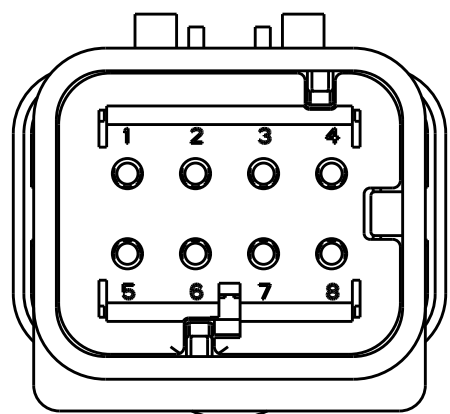


1717676-4
SCALE 2:1

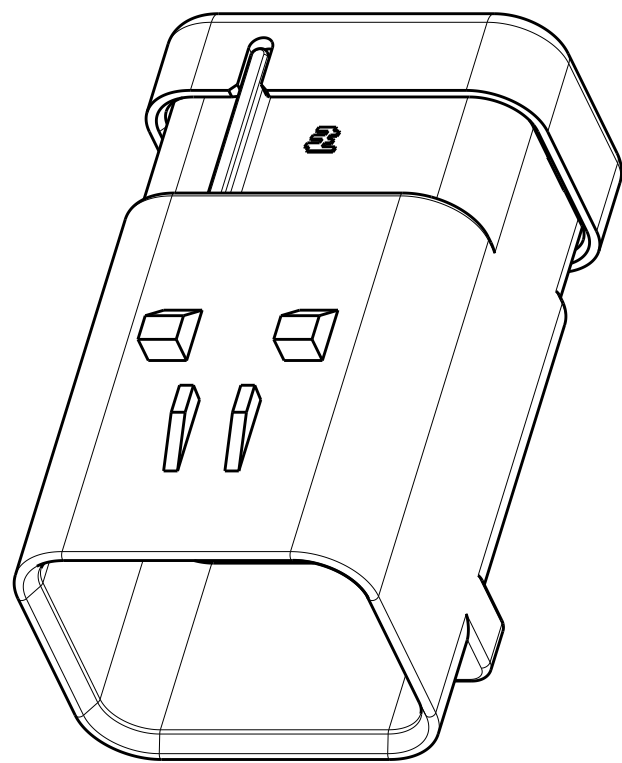


SCALE 2:1

- ① MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- ② MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- ③ MATERIAL: SILICONE
COLOR: GREEN


4. WIRE INSULATION RANGE: $\varnothing 2.24 \sim \varnothing 3.94$

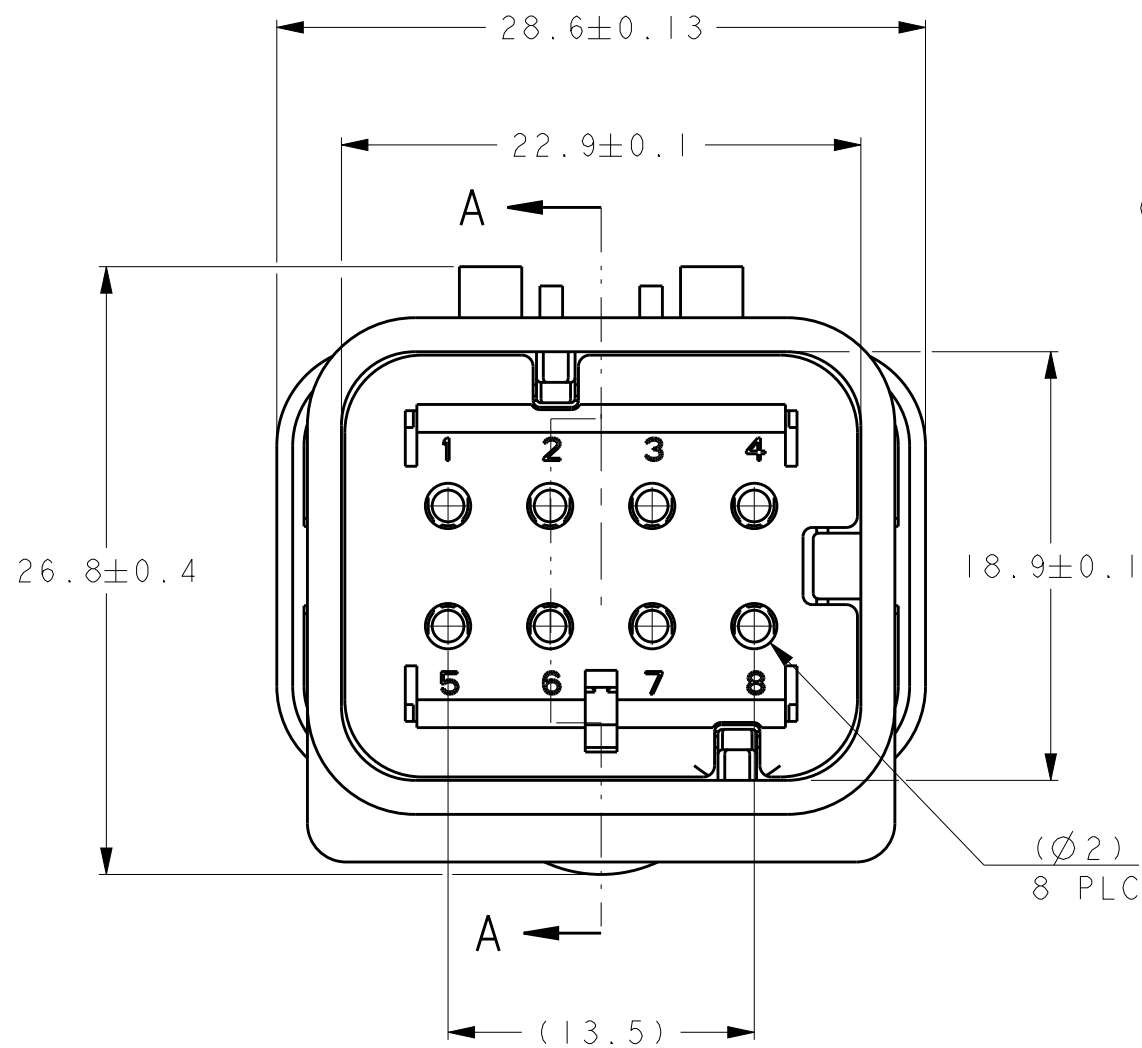

1717676-1 SHOWN

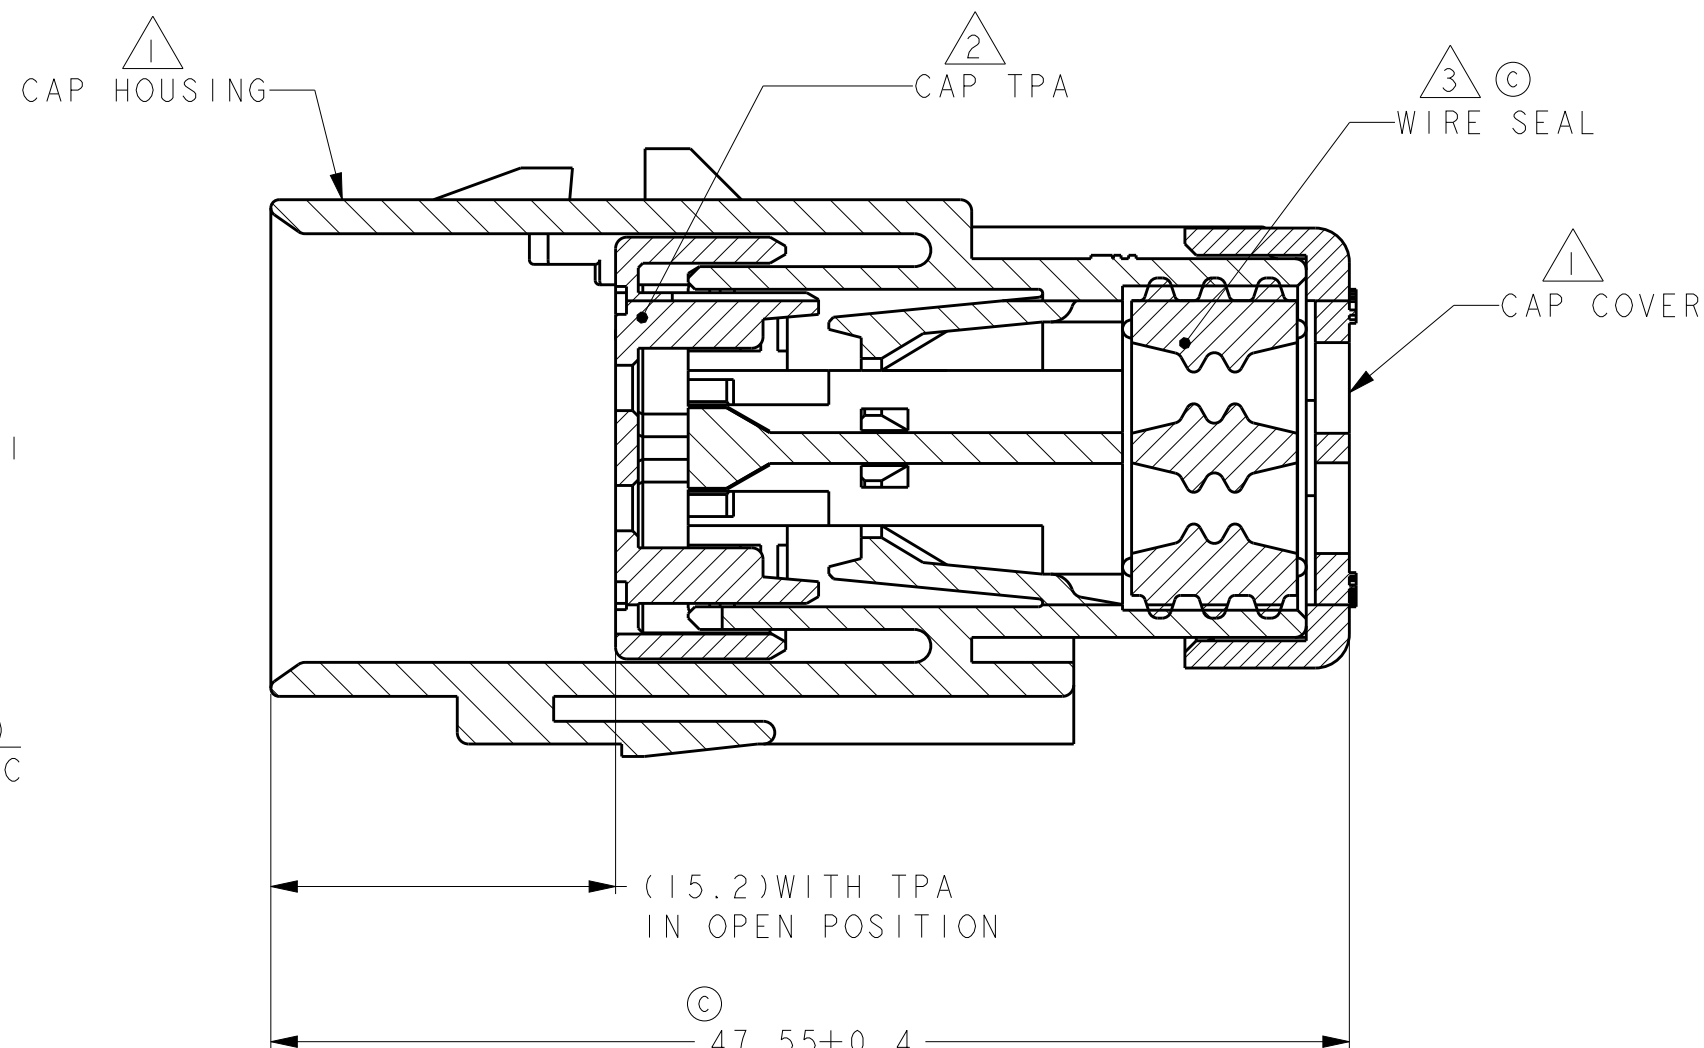

A - A
OPEN POSITION

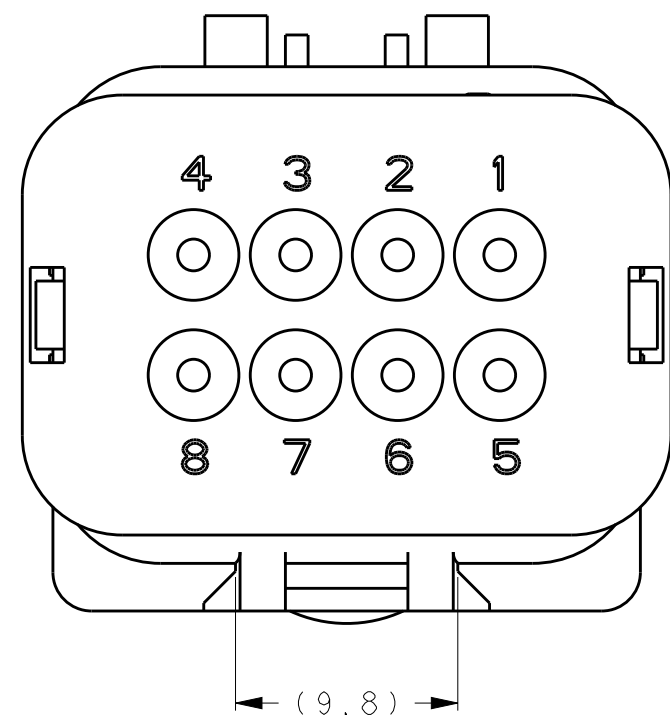

GREEN	1717676-4
YELLOW	1717676-3
GRAY	1717676-2
RED	1717676-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. KATO 15JAN2004	TE Connectivity		
DIMENSIONS:		CHK S. MANABE 15JAN2004			
mm		APVD S. MANABE 15JAN2004	NAME CAP ASSY, 8 POS. BRACKET REVERSE TYPE AMP SEAL 16		
		PRODUCT SPEC	SIZE		
		108-2184	CAGE CODE		
MATERIAL TBD		APPLICATION SPEC	DRAWING NO		
		114-13065	RESTRICTED TO		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT	A200779C-1717676		
		-	SCALE 3:1		
CUSTOMER DRAWING		SHEET 1 OF 1		REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1717676-3](#)