

## General Description

The MAX6754–MAX6764 low-power window detectors monitor undervoltage/overvoltage conditions on system power supplies. These devices assert when the monitored voltage is under the undervoltage and/or over the overvoltage thresholds.

The MAX6754–MAX6759/MAX6763/MAX6764 monitor a single voltage. The MAX6760/MAX6761/MAX6762 monitor dual-voltage systems. The MAX6754/MAX6755/MAX6756 provide a single undervoltage/overvoltage output and the MAX6757–MAX6764 provide independent undervoltage and overvoltage outputs. The outputs are available in push-pull or open-drain configurations.


The MAX6754–MAX6762 offer factory-fixed voltage thresholds for monitoring system voltages from 0.9V to 5V with a selectable  $\pm 5\%$ ,  $\pm 10\%$ , or  $\pm 15\%$  window voltage. The MAX6763/MAX6764 allow for externally adjustable thresholds. The MAX6754–MAX6762 are available in two delay-timing options (20 $\mu$ s, typ or 100ms, min). The MAX6760/MAX6761/MAX6762 also include a latched overvoltage output function and the MAX6754–MAX6762 include a manual reset input.

This family of products is available in small SOT23 and TDFN packages, and is specified over the extended temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

## Applications

- Telecommunications
- Networking
- Computers/Servers
- Data Storage
- Power Metering
- DC-DC Converter
- Modules
- Automotive

## Typical Application Circuit

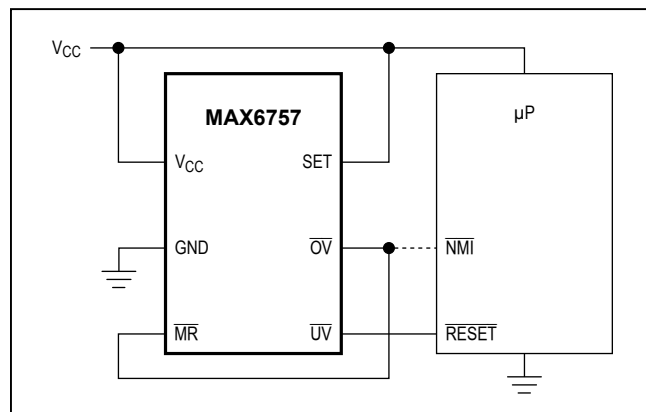

## Benefits and Features

- Single/Dual-Supply Voltage Monitors
- Factory-Trimmed Window Threshold Options for 5V, 3.3V, 3V, 2.5V, 1.8V, 1.5V, 1.2V, and 0.9V Supplies
- Externally Adjustable Window Monitoring Options for Supplies Down to 0.5V
- Selectable Window Threshold Options ( $\pm 5\%$ ,  $\pm 10\%$ ,  $\pm 15\%$ )
- Single (Combined UV/OV) or Dual (Separate UV and OV) Outputs
- 20 $\mu$ s (typ) or 100ms (min) Timeout Period Options (MAX6754–MAX6762)
- Manual Reset Input (MAX6754–MAX6762)
- Latched Overvoltage Output Function (MAX6760/MAX6761/MAX6762)
- Immune to Short Voltage Transients
- Low 10 $\mu$ A Supply Current
- Low-Voltage Operation (Outputs Valid for VCC Down to 1V)
- $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Operating Temperature Range
- Small SOT23 and TDFN Packages

## Ordering Information

| PART              | TEMP RANGE                                      | PIN-PACKAGE |
|-------------------|-------------------------------------------------|-------------|
| MAX6754UK_D_-T    | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 5 SOT23-5   |
| MAX6755UK_D_-T    | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 5 SOT23-5   |
| MAX6756UK_D_-T    | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 5 SOT23-5   |
| MAX6756UK_D_/V+T* | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 5 SOT23-5   |
| MAX6757UT_D_-T    | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 6 SOT23-6   |
| MAX6758UT_D_-T    | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ | 6 SOT23-6   |

Insert the threshold level suffixes for  $V_{CC}$  and  $V_{CC2}$  (Tables 1 and 2) after UK, UT, or TA. For the MAX6754–MAX6759, insert only the  $V_{CC}$  threshold suffix after the UK or UT. Insert the reset timeout delay (Table 3) after D to complete the part number. For example, the MAX6760TALTD3-T provides a  $V_{CC}$  threshold of 5V, a  $V_{CC2}$  threshold of 3.3V, and a 100ms minimum reset timeout period. Sample stock is generally held on standard versions only (see the Standard Versions table). Standard versions have an order increment requirement of 2500 pieces. Nonstandard versions have an order increment requirement of 10,000 pieces. Contact factory for availability.

Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing “-T” with “+T” when ordering.

**Ordering Information** continued at end of data sheet.

**Pin Configurations** appears at end of data sheet.

## Absolute Maximum Ratings

(Voltages with respect to GND.)

$V_{CC}$ ,  $V_{CC2}$  ..... -0.3V to +6.5V  
 SET, OVLATCH,  $\overline{MR}$ , UVIN, OVIN ..... -0.3V to ( $V_{CC}$  + 0.3V)  
 $\overline{UV}$ , RESET,  $\overline{OV}$  (open drain) ..... -0.3V to +6.5V  
 RESET,  $\overline{OV}$ , UV,  $\overline{UV}$ , RESET (push-pull) ..... -0.3V to ( $V_{CC}$  + 0.3V)  
 Input/Output Current (all pins) ..... 20mA  
 Continuous Power Dissipation ( $T_A$  = +70°C)  
   5-Pin SOT23-5 (derate 7.1mW/°C above  $T_A$  = +70°C) ... 571mW  
   6-Pin SOT23-6 (derate 8.7mW/°C above  $T_A$  = +70°C) ... 696mW  
   8-Pin TDFN (derate 24.4mW/°C above  $T_A$  = +70°C) .... 1951mW

Operating Temperature Range ..... -40°C to +125°C  
 Junction Temperature ..... +150°C  
 Storage Temperature Range ..... -65°C to +150°C  
 Lead Temperature (soldering, 10s) ..... +300°C  
 Soldering Temperature (reflow)  
   Lead(Pb)-Free Package ..... +260°C  
   Containing Lead(Pb) ..... +240°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics

( $V_{CC}$  = 1.0V to 6.0V,  $V_{CC2}$  = 0 to 6.0V (MAX6760–MAX6762),  $T_A$  = -40°C to +125°C, unless otherwise noted. Typical values are at  $T_A$  = +25°C.) (Note 1)

| PARAMETER                             | SYMBOL           | CONDITIONS                                                                                       |         |                                    | MIN   | TYP   | MAX   | UNITS |
|---------------------------------------|------------------|--------------------------------------------------------------------------------------------------|---------|------------------------------------|-------|-------|-------|-------|
| POWER REQUIREMENTS                    |                  |                                                                                                  |         |                                    |       |       |       |       |
| Operating Voltage Range               | V <sub>CC</sub>  | (Note 2)                                                                                         |         |                                    | 1.0   |       | 6.0   | V     |
|                                       |                  | MAX6760TAAA/MAX6761TAAA/<br>MAX6762TAAA/MAX6763/MAX6764UT-T                                      |         |                                    | 1.4   |       | 6.0   |       |
| V <sub>CC</sub> Supply Current        | I <sub>CC</sub>  | V <sub>CC</sub> = 3.6V, MAX6754–MAX6759, no load                                                 |         |                                    |       | 13    | 30    | μA    |
|                                       |                  | V <sub>CC</sub> = 3.6V, MAX6763/MAX6764, no load                                                 |         |                                    |       | 10    | 23    |       |
|                                       |                  | V <sub>CC</sub> = 3.6V, V <sub>CC</sub> ≥ V <sub>CC2</sub> ,<br>MAX6760/MAX6761/MAX6762, no load |         |                                    |       | 13    | 30    |       |
| V <sub>CC2</sub> Supply Current       | I <sub>CC2</sub> | V <sub>CC2</sub> = 1.8V, V <sub>CC</sub> ≥ V <sub>CC2</sub> ,<br>MAX6760/MAX6761/MAX6762         |         |                                    |       | 1     | 1.5   | μA    |
| Adjustable Bias Current               |                  | V <sub>CC2</sub> (MAX6760–MAX6762TA_AD_)<br>(Note 3)                                             |         |                                    | -20   |       | +20   | nA    |
| V <sub>CC</sub> THRESHOLD             |                  |                                                                                                  |         |                                    |       |       |       |       |
| V <sub>CC</sub> Overvoltage Threshold | OV <sub>TH</sub> | T <sub>A</sub> = -40°C to<br>+125°C, rising<br>V <sub>CC</sub>                                   | L, 5V   | V <sub>SET</sub> = V <sub>SB</sub> | 5.750 | 5.875 | 6.000 | V     |
|                                       |                  |                                                                                                  |         | SET = V <sub>CC</sub>              | 5.500 | 5.625 | 5.750 |       |
|                                       |                  |                                                                                                  |         | SET = GND                          | 5.250 | 5.375 | 5.500 |       |
|                                       |                  |                                                                                                  | T, 3.3V | V <sub>SET</sub> = V <sub>SB</sub> | 3.795 | 3.878 | 3.960 |       |
|                                       |                  |                                                                                                  |         | SET = V <sub>CC</sub>              | 3.630 | 3.713 | 3.795 |       |
|                                       |                  |                                                                                                  |         | SET = GND                          | 3.465 | 3.548 | 3.630 |       |
|                                       |                  |                                                                                                  | R, 3.0V | V <sub>SET</sub> = V <sub>SB</sub> | 3.450 | 3.525 | 3.600 |       |
|                                       |                  |                                                                                                  |         | SET = V <sub>CC</sub>              | 3.300 | 3.375 | 3.450 |       |
|                                       |                  |                                                                                                  |         | SET = GND                          | 3.150 | 3.225 | 3.300 |       |
|                                       |                  |                                                                                                  | Z, 2.5V | V <sub>SET</sub> = V <sub>SB</sub> | 2.875 | 2.938 | 3.000 |       |
|                                       |                  |                                                                                                  |         | SET = V <sub>CC</sub>              | 2.750 | 2.813 | 2.875 |       |
|                                       |                  |                                                                                                  |         | SET = GND                          | 2.625 | 2.688 | 2.750 |       |
|                                       |                  |                                                                                                  | W, 1.8V | V <sub>SET</sub> = V <sub>SB</sub> | 2.070 | 2.115 | 2.160 |       |
|                                       |                  |                                                                                                  |         | SET = V <sub>CC</sub>              | 1.980 | 2.025 | 2.070 |       |
|                                       |                  |                                                                                                  |         | SET = GND                          | 1.890 | 1.935 | 1.980 |       |

## Electrical Characteristics (continued)

( $V_{CC} = 1.0V$  to  $6.0V$ ,  $V_{CC2} = 0$  to  $6.0V$  (MAX6760–MAX6762),  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                       | SYMBOL     | CONDITIONS                                                       |         |                             | MIN   | TYP   | MAX   | UNITS |
|---------------------------------|------------|------------------------------------------------------------------|---------|-----------------------------|-------|-------|-------|-------|
| $V_{CC}$ Undervoltage Threshold | $UV_{TH}$  | $T_A = -40^{\circ}C$<br>to $+125^{\circ}C$ ,<br>falling $V_{CC}$ | L, 5V   | $V_{SET} = V_{SB}$          | 4.000 | 4.125 | 4.250 | V     |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 4.250 | 4.375 | 4.500 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 4.500 | 4.625 | 4.750 |       |
|                                 |            |                                                                  | T, 3.3V | $V_{SET} = V_{SB}$          | 2.640 | 2.723 | 2.805 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 2.805 | 2.888 | 2.970 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 2.970 | 3.053 | 3.135 |       |
|                                 |            |                                                                  | R, 3.0V | $V_{SET} = V_{SB}$          | 2.400 | 2.475 | 2.550 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 2.550 | 2.625 | 2.700 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 2.700 | 2.775 | 2.850 |       |
|                                 |            |                                                                  | Z, 2.5V | $V_{SET} = V_{SB}$          | 2.000 | 2.063 | 2.125 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 2.125 | 2.188 | 2.250 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 2.250 | 2.313 | 2.375 |       |
|                                 |            |                                                                  | W, 1.8V | $V_{SET} = V_{SB}$          | 1.440 | 1.485 | 1.530 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 1.530 | 1.575 | 1.620 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 1.620 | 1.665 | 1.710 |       |
| $V_{CC2}$ Overvoltage Threshold | $OV_{TH2}$ | $T_A = -40^{\circ}C$<br>to $+125^{\circ}C$ ,<br>rising $V_{CC2}$ | T, 3.3V | $V_{SET} = V_{SB}$          | 3.795 | 3.878 | 3.960 | V     |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 3.630 | 3.713 | 3.795 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 3.465 | 3.548 | 3.630 |       |
|                                 |            |                                                                  | R, 3.0V | $V_{SET} = V_{SB}$          | 3.450 | 3.525 | 3.600 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 3.300 | 3.375 | 3.450 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 3.150 | 3.225 | 3.300 |       |
|                                 |            |                                                                  | Z, 2.5V | $V_{SET} = V_{SB}$          | 2.875 | 2.938 | 3.000 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 2.750 | 2.813 | 2.875 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 2.625 | 2.688 | 2.750 |       |
|                                 |            |                                                                  | W, 1.8V | $V_{SET} = V_{SB}$          | 2.070 | 2.115 | 2.160 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 1.980 | 2.025 | 2.070 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 1.890 | 1.935 | 1.980 |       |
|                                 |            |                                                                  | I, 1.5V | $V_{SET} = V_{SB}$ (Note 2) | 1.725 | 1.763 | 1.800 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$ (Note 2)     | 1.650 | 1.688 | 1.725 |       |
|                                 |            |                                                                  |         | $SET = GND$ (Note 2)        | 1.575 | 1.613 | 1.650 |       |
|                                 |            |                                                                  | G, 1.2V | $V_{SET} = V_{SB}$ (Note 2) | 1.380 | 1.410 | 1.440 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$ (Note 2)     | 1.320 | 1.350 | 1.380 |       |
|                                 |            |                                                                  |         | $SET = GND$ (Note 2)        | 1.260 | 1.290 | 1.320 |       |
|                                 |            |                                                                  | E, 0.9V | $V_{SET} = V_{SB}$ (Note 2) | 1.035 | 1.058 | 1.080 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$ (Note 2)     | 0.990 | 1.013 | 1.035 |       |
|                                 |            |                                                                  |         | $SET = GND$ (Note 2)        | 0.945 | 0.968 | 0.990 |       |
|                                 |            |                                                                  | ADJ     | $V_{SET} = V_{SB}$          | 0.489 | 0.500 | 0.511 |       |
|                                 |            |                                                                  |         | $SET = V_{CC}$              | 0.468 | 0.479 | 0.489 |       |
|                                 |            |                                                                  |         | $SET = GND$                 | 0.447 | 0.457 | 0.468 |       |

## Electrical Characteristics (continued)

( $V_{CC} = 1.0V$  to  $6.0V$ ,  $V_{CC2} = 0$  to  $6.0V$  (MAX6760–MAX6762),  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                                                      | SYMBOL             | CONDITIONS                                                 |         |                                             | MIN   | TYP   | MAX   | UNITS |
|----------------------------------------------------------------|--------------------|------------------------------------------------------------|---------|---------------------------------------------|-------|-------|-------|-------|
| V <sub>CC2</sub> Undervoltage Threshold                        | UV <sub>TH2</sub>  | T <sub>A</sub> = -40°C to +125°C, falling V <sub>CC2</sub> | T, 3.3V | V <sub>SET</sub> = V <sub>SB</sub>          | 2.640 | 2.723 | 2.805 | V     |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub>                       | 2.805 | 2.888 | 2.970 |       |
|                                                                |                    |                                                            |         | SET = GND                                   | 2.970 | 3.053 | 3.135 |       |
|                                                                |                    |                                                            | R, 3.0V | V <sub>SET</sub> = V <sub>SB</sub>          | 2.400 | 2.475 | 2.550 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub>                       | 2.550 | 2.625 | 2.700 |       |
|                                                                |                    |                                                            |         | SET = GND                                   | 2.700 | 2.775 | 2.850 |       |
|                                                                |                    |                                                            | Z, 2.5V | V <sub>SET</sub> = V <sub>SB</sub>          | 2.000 | 2.063 | 2.125 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub>                       | 2.125 | 2.188 | 2.250 |       |
|                                                                |                    |                                                            |         | SET = GND                                   | 2.250 | 2.313 | 2.375 |       |
|                                                                |                    |                                                            | W, 1.8V | V <sub>SET</sub> = V <sub>SB</sub>          | 1.440 | 1.485 | 1.530 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub>                       | 1.530 | 1.575 | 1.620 |       |
|                                                                |                    |                                                            |         | SET = GND                                   | 1.620 | 1.665 | 1.710 |       |
|                                                                |                    |                                                            | I, 1.5V | V <sub>SET</sub> = V <sub>SB</sub> (Note 2) | 1.200 | 1.238 | 1.275 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub> (Note 2)              | 1.275 | 1.313 | 1.350 |       |
|                                                                |                    |                                                            |         | SET = GND (Note 2)                          | 1.350 | 1.388 | 1.425 |       |
|                                                                |                    |                                                            | G, 1.2V | V <sub>SET</sub> = V <sub>SB</sub> (Note 2) | 0.960 | 0.990 | 1.020 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub> (Note 2)              | 1.020 | 1.050 | 1.080 |       |
|                                                                |                    |                                                            |         | SET = GND (Note 2)                          | 1.080 | 1.110 | 1.140 |       |
|                                                                |                    |                                                            | E, 0.9V | V <sub>SET</sub> = V <sub>SB</sub> (Note 2) | 0.720 | 0.743 | 0.765 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub> (Note 2)              | 0.765 | 0.788 | 0.810 |       |
|                                                                |                    |                                                            |         | SET = GND (Note 2)                          | 0.810 | 0.833 | 0.855 |       |
|                                                                |                    |                                                            | ADJ     | V <sub>SET</sub> = V <sub>SB</sub>          | 0.340 | 0.351 | 0.362 |       |
|                                                                |                    |                                                            |         | SET = V <sub>CC</sub>                       | 0.362 | 0.372 | 0.383 |       |
|                                                                |                    |                                                            |         | SET = GND                                   | 0.383 | 0.394 | 0.404 |       |
| Threshold Hysteresis                                           | V <sub>HYST</sub>  | V <sub>CC</sub> , V <sub>CC2</sub>                         |         |                                             | 0.7   |       |       | %     |
| UNDERVOLTAGE/OVERVOLTAGE INPUTS (UVIN, OVIN) (MAX6763/MAX6764) |                    |                                                            |         |                                             |       |       |       |       |
| UVIN, OVIN Threshold Voltage                                   | V <sub>TH-IN</sub> |                                                            |         |                                             | 0.485 | 0.5   | 0.515 | V     |
| UVIN, OVIN Input Bias Current                                  | I <sub>IN</sub>    | (Note 3)                                                   |         |                                             | -20   |       | +20   | nA    |
| UVIN, OVIN Threshold Hysteresis                                | V <sub>HYST</sub>  |                                                            |         |                                             | 0.7   |       |       | %     |

## Electrical Characteristics (continued)

( $V_{CC} = 1.0V$  to  $6.0V$ ,  $V_{CC2} = 0$  to  $6.0V$  (MAX6760–MAX6762),  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                                        | SYMBOL               | CONDITIONS                                                                                                                           |    | MIN                    | TYP             | MAX | UNITS |
|--------------------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------|----|------------------------|-----------------|-----|-------|
| TIMING CHARACTERISTICS                           |                      |                                                                                                                                      |    |                        |                 |     |       |
| Reset and UV Timeout Period                      | t <sub>RP</sub>      | Figure 7                                                                                                                             | D0 | 20                     |                 |     | μs    |
|                                                  |                      |                                                                                                                                      | D3 | 100                    | 185             | 320 | ms    |
| V <sub>CC</sub> to Reset Delay                   | t <sub>D-RESET</sub> | V <sub>CC</sub> /V <sub>CC2</sub> falling at 10mV/μs from UV <sub>TH</sub> + 100mV to UV <sub>TH</sub> - 100mV                       |    | 20                     |                 |     | μs    |
| V <sub>CC</sub> to UV Delay                      | t <sub>D-UV</sub>    | V <sub>CC</sub> /V <sub>CC2</sub> rising at 10mV/μs from OV <sub>TH</sub> - 100mV to OV <sub>TH</sub> + 100mV                        |    | 20                     |                 |     | μs    |
| V <sub>CC</sub> to OV Delay                      | t <sub>D-OV</sub>    | V <sub>CC</sub> /V <sub>CC2</sub> rising at 10mV/μs from OV <sub>TH</sub> - 100mV to OV <sub>TH</sub> + 100mV (MAX6757–MAX6762 only) |    | 20                     |                 |     | μs    |
| UVIN to UV Delay                                 |                      | (MAX6763/MAX6764)                                                                                                                    |    | 20                     |                 |     | μs    |
| OVIN to OV Delay                                 |                      | (MAX6763/MAX6764)                                                                                                                    |    | 20                     |                 |     | μs    |
| Startup Delay Time                               | t <sub>START</sub>   | D0 options only, $\overline{OV}$ output (Note 4)                                                                                     |    | 2                      |                 |     | ms    |
| THRESHOLD WINDOW SELECT INPUT (SET)              |                      |                                                                                                                                      |    |                        |                 |     |       |
| Input-Voltage Low                                |                      |                                                                                                                                      |    | 0                      | 0.1             |     | V     |
| Input Bias Voltage (Note 5)                      | V <sub>SB</sub>      | V <sub>CC</sub> = 1.4V                                                                                                               |    | 0.65                   | 0.75            |     | V     |
|                                                  |                      | V <sub>CC</sub> = 3.0V                                                                                                               |    | 0.81                   | 2.19            |     |       |
|                                                  |                      | V <sub>CC</sub> = 6.0V                                                                                                               |    | 1.10                   | 4.90            |     |       |
| Input-Voltage High                               |                      |                                                                                                                                      |    | V <sub>CC</sub> - 0.1  | V <sub>CC</sub> |     | V     |
| Input Current                                    | I <sub>SET</sub>     |                                                                                                                                      |    | -1                     | +1              |     | μA    |
| MANUAL RESET ( $\overline{MR}$ )                 |                      |                                                                                                                                      |    |                        |                 |     |       |
| Input-Voltage Low                                |                      |                                                                                                                                      |    | 0.23 x V <sub>CC</sub> |                 |     | V     |
| Input-Voltage High                               |                      |                                                                                                                                      |    | 0.6 x V <sub>CC</sub>  |                 |     | V     |
| Pullup Resistance to V <sub>CC</sub>             |                      |                                                                                                                                      |    | 26                     |                 |     | kΩ    |
| Minimum Pulse Width                              |                      |                                                                                                                                      |    | 4                      |                 |     | μs    |
| Transient Immunity                               |                      |                                                                                                                                      |    | 300                    |                 |     | ns    |
| Propagation Delay                                | t <sub>D-MR</sub>    | $\overline{MR}$ falling, Figure 7                                                                                                    |    | 300                    |                 |     | ns    |
|                                                  | t <sub>MR_P</sub>    | $\overline{MR}$ rising, Figure 7                                                                                                     | D0 | 40                     |                 |     |       |
|                                                  |                      |                                                                                                                                      | D3 | 100                    | 185             | 320 | ms    |
| OVERVOLTAGE OUTPUT LATCH CONTROL INPUT (OVLATCH) |                      |                                                                                                                                      |    |                        |                 |     |       |
| Input-Voltage Low                                |                      |                                                                                                                                      |    | 0.3 x V <sub>CC</sub>  |                 |     | V     |
| Input-Voltage High                               |                      |                                                                                                                                      |    | 0.7 x V <sub>CC</sub>  |                 |     | V     |

## Electrical Characteristics (continued)

( $V_{CC} = 1.0V$  to  $6.0V$ ,  $V_{CC2} = 0$  to  $6.0V$  (MAX6760–MAX6762),  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                                                                                                            | SYMBOL        | CONDITIONS                                                         | MIN                 | TYP | MAX | UNITS   |
|----------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------|---------------------|-----|-----|---------|
| Input Bias Current                                                                                                   | $I_{OVLATCH}$ |                                                                    | -1                  |     | +1  | $\mu A$ |
| <b>RESET, <math>\overline{RESET}</math>, <math>\overline{UV}</math>, <math>UV</math>, <math>\overline{OV}</math></b> |               |                                                                    |                     |     |     |         |
| $\overline{RESET}$ , $\overline{UV}$ Output Low (Open Drain or Push-Pull)                                            | $V_{OL}$      | Any $V_{CC} \geq 1.0V$ , $I_{SINK} = 100\mu A$ , output asserted   |                     |     | 0.3 | V       |
|                                                                                                                      |               | Any $V_{CC} \geq 1.2V$ , $I_{SINK} = 200\mu A$ , output asserted   |                     |     | 0.3 |         |
|                                                                                                                      |               | Any $V_{CC} \geq 1.71V$ , $I_{SINK} = 1.0mA$ , output asserted     |                     |     | 0.3 |         |
|                                                                                                                      |               | Any $V_{CC} \geq 2.85V$ , $I_{SINK} = 2.0mA$ , output asserted     |                     |     | 0.3 |         |
|                                                                                                                      |               | Any $V_{CC} \geq 4.75V$ , $I_{SINK} = 4.0mA$ , output asserted     |                     |     | 0.3 |         |
| $\overline{RESET}$ , $\overline{UV}$ Output High (Push-Pull)                                                         | $V_{OH}$      | Any $V_{CC} \geq 1.71V$ , $I_{SOURCE} = 0.8mA$ , output deasserted | $0.8 \times V_{CC}$ |     |     | V       |
|                                                                                                                      |               | Any $V_{CC} \geq 2.85V$ , $I_{SOURCE} = 2.0mA$ , output deasserted | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                                                      |               | Any $V_{CC} \geq 4.75V$ , $I_{SOURCE} = 4.0mA$ , output deasserted | $0.8 \times V_{CC}$ |     |     |         |
| RESET, $UV$ Output Low (Push-Pull)                                                                                   | $V_{OL}$      | Any $V_{CC} \geq 1.71V$ , $I_{SINK} = 1.0mA$ , output deasserted   |                     |     | 0.3 | V       |
|                                                                                                                      |               | Any $V_{CC} \geq 2.85V$ , $I_{SINK} = 2.0mA$ , output deasserted   |                     |     | 0.3 |         |
|                                                                                                                      |               | Any $V_{CC} \geq 4.75V$ , $I_{SINK} = 4.0mA$ , output deasserted   |                     |     | 0.3 |         |
| RESET, $UV$ Output High (Push-Pull)                                                                                  | $V_{OH}$      | Any $V_{CC} \geq 1.0V$ , $I_{SOURCE} = 50\mu A$ , output asserted  | $0.8 \times V_{CC}$ |     |     | V       |
|                                                                                                                      |               | Any $V_{CC} \geq 1.2V$ , $I_{SOURCE} = 100\mu A$ , output asserted | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                                                      |               | Any $V_{CC} \geq 1.71V$ , $I_{SOURCE} = 0.8mA$ , output asserted   | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                                                      |               | Any $V_{CC} \geq 2.85V$ , $I_{SOURCE} = 2.0mA$ , output asserted   | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                                                      |               | Any $V_{CC} \geq 4.75V$ , $I_{SOURCE} = 4.0mA$ , output asserted   | $0.8 \times V_{CC}$ |     |     |         |

**Electrical Characteristics (continued)**

( $V_{CC} = 1.0V$  to  $6.0V$ ,  $V_{CC2} = 0$  to  $6.0V$  (MAX6760–MAX6762),  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 1)

| PARAMETER                                                                                    | SYMBOL    | CONDITIONS                                                              | MIN                 | TYP | MAX | UNITS   |
|----------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------|---------------------|-----|-----|---------|
| $\overline{OV}$ Output Low<br>(Open-Drain or Push-Pull)                                      | $V_{OL}$  | Any $V_{CC} \geq 1.98V$ , $I_{SINK} = 1.4mA$ ,<br>output asserted       |                     |     | 0.3 | V       |
|                                                                                              |           | Any $V_{CC} \geq 2.75V$ , $I_{SINK} = 2.0mA$ ,<br>output asserted       |                     |     | 0.3 |         |
|                                                                                              |           | Any $V_{CC} \geq 3.63V$ , $I_{SINK} = 3.0mA$ ,<br>output asserted       |                     |     | 0.3 |         |
|                                                                                              |           | Any $V_{CC} \geq 5.5V$ , $I_{SINK} = 4.0mA$ ,<br>output asserted        |                     |     | 0.3 |         |
| $\overline{OV}$ Output High<br>(Push-Pull)                                                   | $V_{OH}$  | Any $V_{CC} \geq 1.0V$ , $I_{SOURCE} = 50\mu A$ ,<br>output deasserted  | $0.8 \times V_{CC}$ |     |     | V       |
|                                                                                              |           | Any $V_{CC} \geq 1.2V$ , $I_{SOURCE} = 100\mu A$ ,<br>output deasserted | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                              |           | Any $V_{CC} \geq 1.98V$ , $I_{SOURCE} = 1.4mA$ ,<br>output deasserted   | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                              |           | Any $V_{CC} \geq 2.75V$ , $I_{SOURCE} = 2.0mA$ ,<br>output deasserted   | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                              |           | Any $V_{CC} \geq 3.63V$ , $I_{SOURCE} = 3.0mA$ ,<br>output deasserted   | $0.8 \times V_{CC}$ |     |     |         |
|                                                                                              |           | Any $V_{CC} \geq 5.5V$ , $I_{SOURCE} = 4.5mA$ ,<br>output deasserted    | $0.8 \times V_{CC}$ |     |     |         |
| $\overline{RESET}$ , $\overline{UV}$ , $\overline{OV}$ Output Open-<br>Drain Leakage Current | $I_{LKG}$ | Output not asserted                                                     |                     |     | 1   | $\mu A$ |

**Note 1:** Devices are production tested at  $+25^{\circ}C$ . Overtemperature limits are guaranteed by design.

**Note 2:** Voltage monitoring requires that  $V_{CC}$  must be greater than or equal to  $1.4V$ , but outputs remain asserted in the correct state for  $V_{CC}$  down to  $1.0V$ .








**Note 3:** Guaranteed by design.

**Note 4:** For D0 window detector options and  $\overline{OV}$  outputs, startup delay time is the time required for the internal reference/circuitry to reach specified accuracy after the monitor is powered up from GND.

**Note 5:** The input bias voltage is based off of  $V_{CC}$ . The minimum value is given by the equation  $(0.1 \times V_{CC} + 0.51)V$  and the maximum value is given by  $(0.9 \times V_{CC} - 0.51)V$ .

## Typical Operating Characteristics

( $V_{CC} = 5V$ ,  $V_{CC2} = 3.3V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

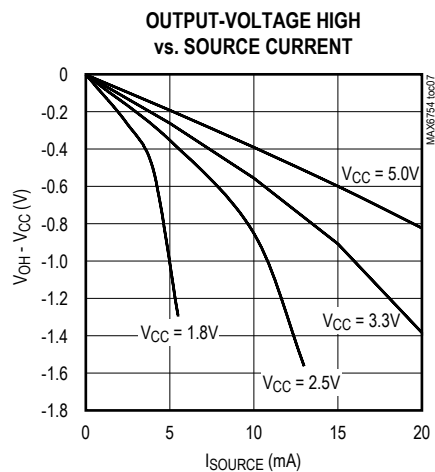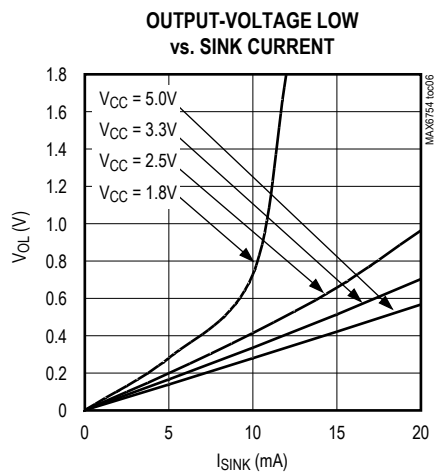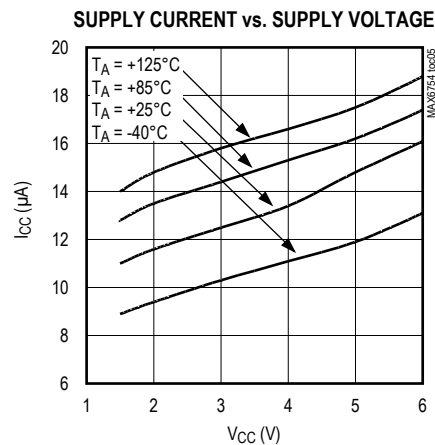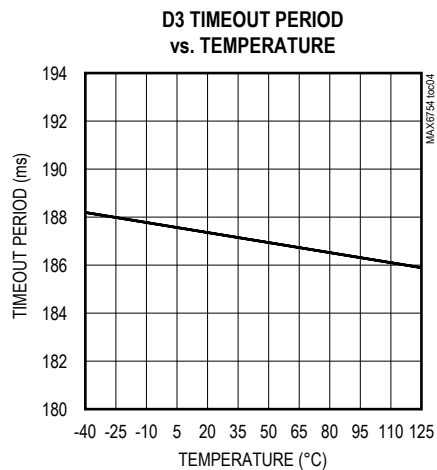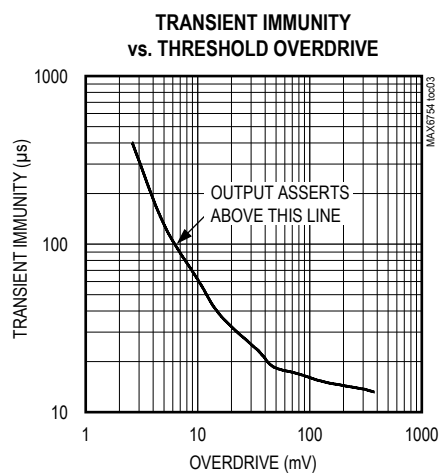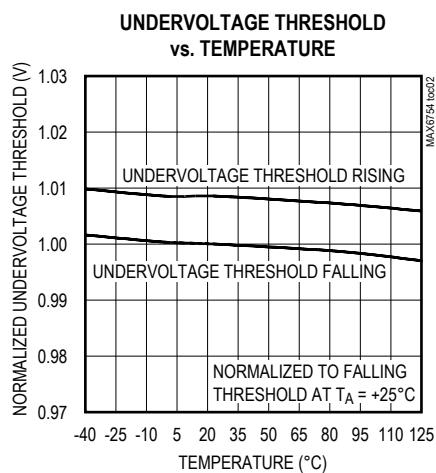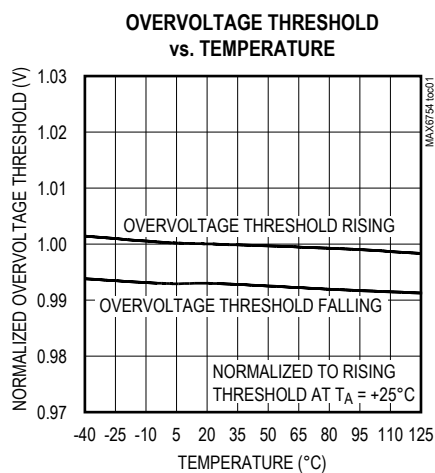



## Pin Description

| PIN                             |                                 |                                 |                     | NAME                                | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------|---------------------------------|---------------------------------|---------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX6754/<br>MAX6755/<br>MAX6756 | MAX6757/<br>MAX6758/<br>MAX6759 | MAX6760/<br>MAX6761/<br>MAX6762 | MAX6763/<br>MAX6764 |                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 1                               | 1                               | 1                               | —                   | V <sub>CC</sub>                     | Power Voltage Input. V <sub>CC</sub> powers the device. V <sub>CC</sub> is the monitored voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| —                               | —                               | —                               | 1                   |                                     | Power Input. V <sub>CC</sub> powers the device.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 2                               | 2                               | 2                               | 2                   | GND                                 | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 3                               | 3                               | 8                               | —                   | $\overline{\text{MR}}$              | Active-Low Manual Reset Input. Drive $\overline{\text{MR}}$ low to assert undervoltage and reset outputs. The asserted output remains asserted for the specified propagation delay period after $\overline{\text{MR}}$ goes high. $\overline{\text{MR}}$ is internally pulled up to V <sub>CC</sub> through a 26kΩ resistor.                                                                                                                                                                                                                                                                                                                                                                 |
| 4                               | —                               | —                               | —                   | RESET/<br>$\overline{\text{RESET}}$ | Reset Output. The Reset Output asserts when V <sub>CC</sub> is below the selected UV <sub>TH</sub> threshold or above the selected OV <sub>TH</sub> threshold. Reset output deasserts after the specified timeout period after V <sub>CC</sub> rises above the UV <sub>TH</sub> threshold or drops below the OV <sub>TH</sub> threshold.<br>MAX6754: Active-low push-pull output ( $\overline{\text{RESET}}$ ).<br>MAX6755: Active-high push-pull output (RESET).<br>MAX6756: Active-low open-drain output ( $\overline{\text{RESET}}$ ).                                                                                                                                                    |
| 5                               | 6                               | 4                               | —                   | SET                                 | Threshold Window Select Input. SET configures the undervoltage and overvoltage window range for the internal detectors. Connect SET to GND for ±5% window, or to V <sub>CC</sub> for ±10% window. Bias SET to V <sub>CC</sub> /2 for a ±15% window.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| —                               | 4                               | 6                               | —                   | UV/<br>$\overline{\text{UV}}$       | Undervoltage Output. UV/ $\overline{\text{UV}}$ asserts when the monitored supply/supplies are below the UV <sub>TH</sub> thresholds or $\overline{\text{MR}}$ is low. UV/ $\overline{\text{UV}}$ deasserts after the specified timeout period when the monitored supply/supplies rise above the UV <sub>TH</sub> thresholds or for the specified propagation delay after $\overline{\text{MR}}$ goes high.<br>MAX6757/MAX6760: Active-low push-pull output ( $\overline{\text{UV}}$ ).<br>MAX6758/MAX6761: Active-high push-pull output (UV).<br>MAX6759/MAX6762: Active-low open-drain output (UV).                                                                                        |
| —                               | —                               | 3                               | —                   | V <sub>CC2</sub>                    | V <sub>CC2</sub> Voltage Input. Input for the second window voltage monitor, and device output power supply when V <sub>CC2</sub> > V <sub>CC</sub> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                 | 5                               | 5                               | 5                   | $\overline{\text{OV}}$              | Active-Low Overvoltage Output. $\overline{\text{OV}}$ asserts low when the monitored supply/supplies are above their overvoltage threshold (OV <sub>TH</sub> ). $\overline{\text{OV}}$ goes high impedance immediately when the monitored supply/supplies drop below OV <sub>TH</sub> .<br>There is no timeout delay period for the $\overline{\text{OV}}$ output.<br>For MAX6763/MAX6764, $\overline{\text{OV}}$ is low when OVIN is above the internal 0.5V threshold. $\overline{\text{OV}}$ is high when OVIN is below the internal 0.5V threshold.<br>MAX6757–MAX6762: Active-low open-drain output.<br>MAX6763: Active-low push-pull output.<br>MAX6764: Active-low open-drain output. |

Pin Description (continued)

| PIN                             |                                 |                                 |                     | NAME            | FUNCTION                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|---------------------------------|---------------------------------|---------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX6754/<br>MAX6755/<br>MAX6756 | MAX6757/<br>MAX6758/<br>MAX6759 | MAX6760/<br>MAX6761/<br>MAX6762 | MAX6763/<br>MAX6764 |                 |                                                                                                                                                                                                                                                                                                                                                                                   |
|                                 |                                 | 7                               | —                   | OVLATCH         | Overvoltage Output Latch Control Input. Drive OVLATCH high to latch the overvoltage output for any V <sub>CC</sub> or V <sub>CC2</sub> overvoltage condition. Drive OVLATCH low to clear the latch after overvoltage conditions have been removed. The latch is transparent when OVLATCH is connected to GND. OVLATCH is a high-impedance input. Use external pullup or pulldown. |
| —                               | —                               | —                               | 3                   | UVIN            | Undervoltage Input. $\overline{UV}$ is low when UVIN is below the internal 0.5V threshold. $\overline{UV}$ is high when UVIN is above the internal 0.5V threshold.                                                                                                                                                                                                                |
| —                               | —                               | —                               | 4                   | $\overline{UV}$ | Undervoltage Output. $\overline{UV}$ is low when UVIN is below the internal 0.5V threshold. $\overline{UV}$ is high when UVIN is above the internal 0.5V threshold. There is no timeout delay period for the $\overline{UV}$ output.                                                                                                                                              |
| —                               | —                               | —                               | 6                   | OVIN            | Overvoltage Input. $\overline{OV}$ is low when OVIN is above the internal 0.5V threshold. $\overline{OV}$ is high when OVIN is below the internal 0.5V threshold.                                                                                                                                                                                                                 |
| —                               | —                               | —                               | —                   | EP              | Exposed Pad (TDFN Only). EP is internally connected to GND. Leave EP unconnected or connect to GND.                                                                                                                                                                                                                                                                               |

Functional Diagrams

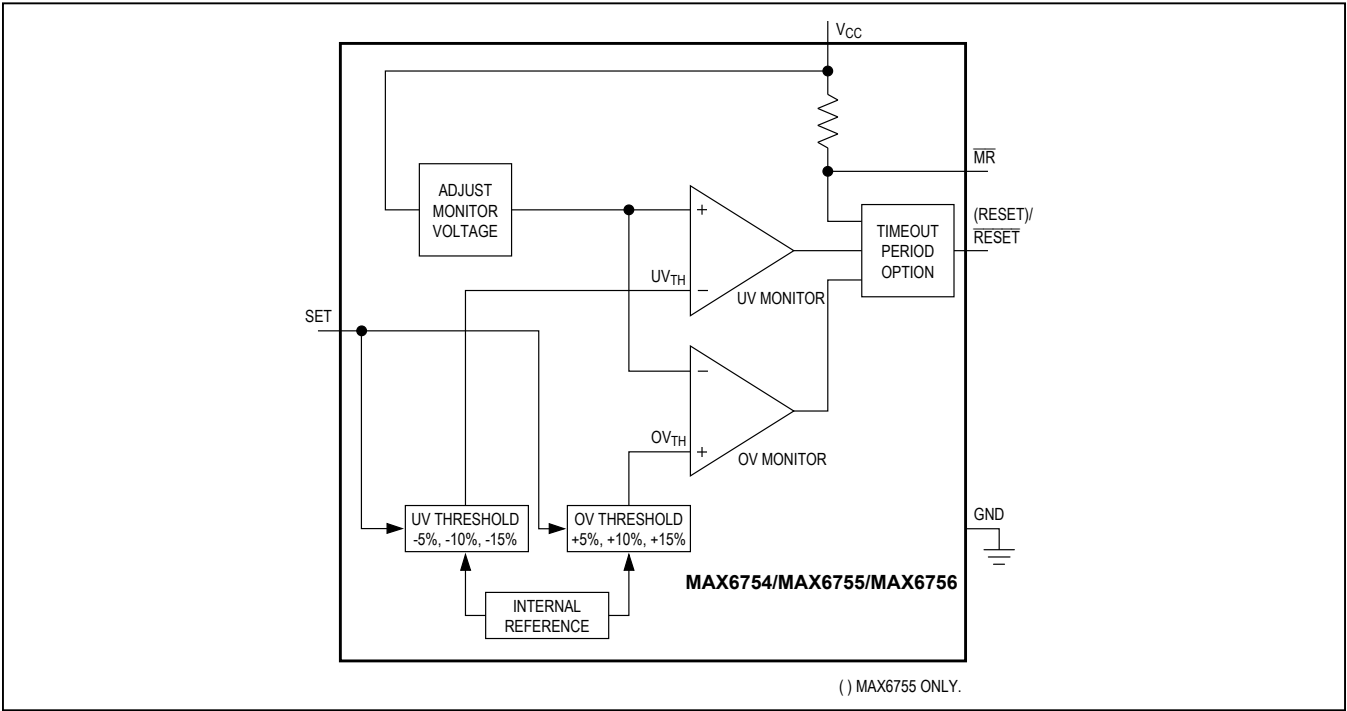


Figure 1. MAX6754/MAX6755/MAX6756 Functional Diagram

## Functional Diagrams (continued)

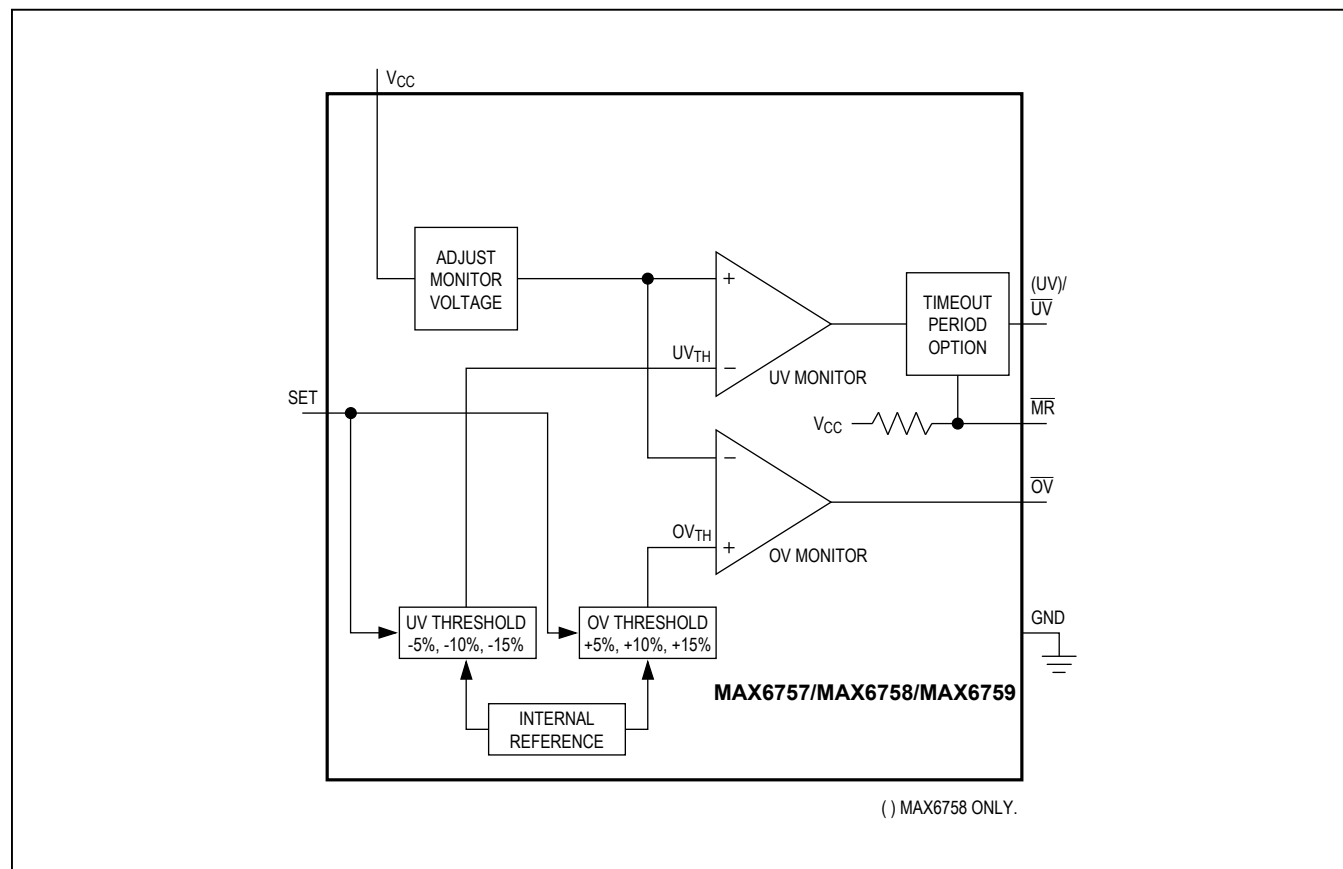


Figure 2. MAX6757/MAX6758/MAX6759 Functional Diagram

## Functional Diagrams (continued)

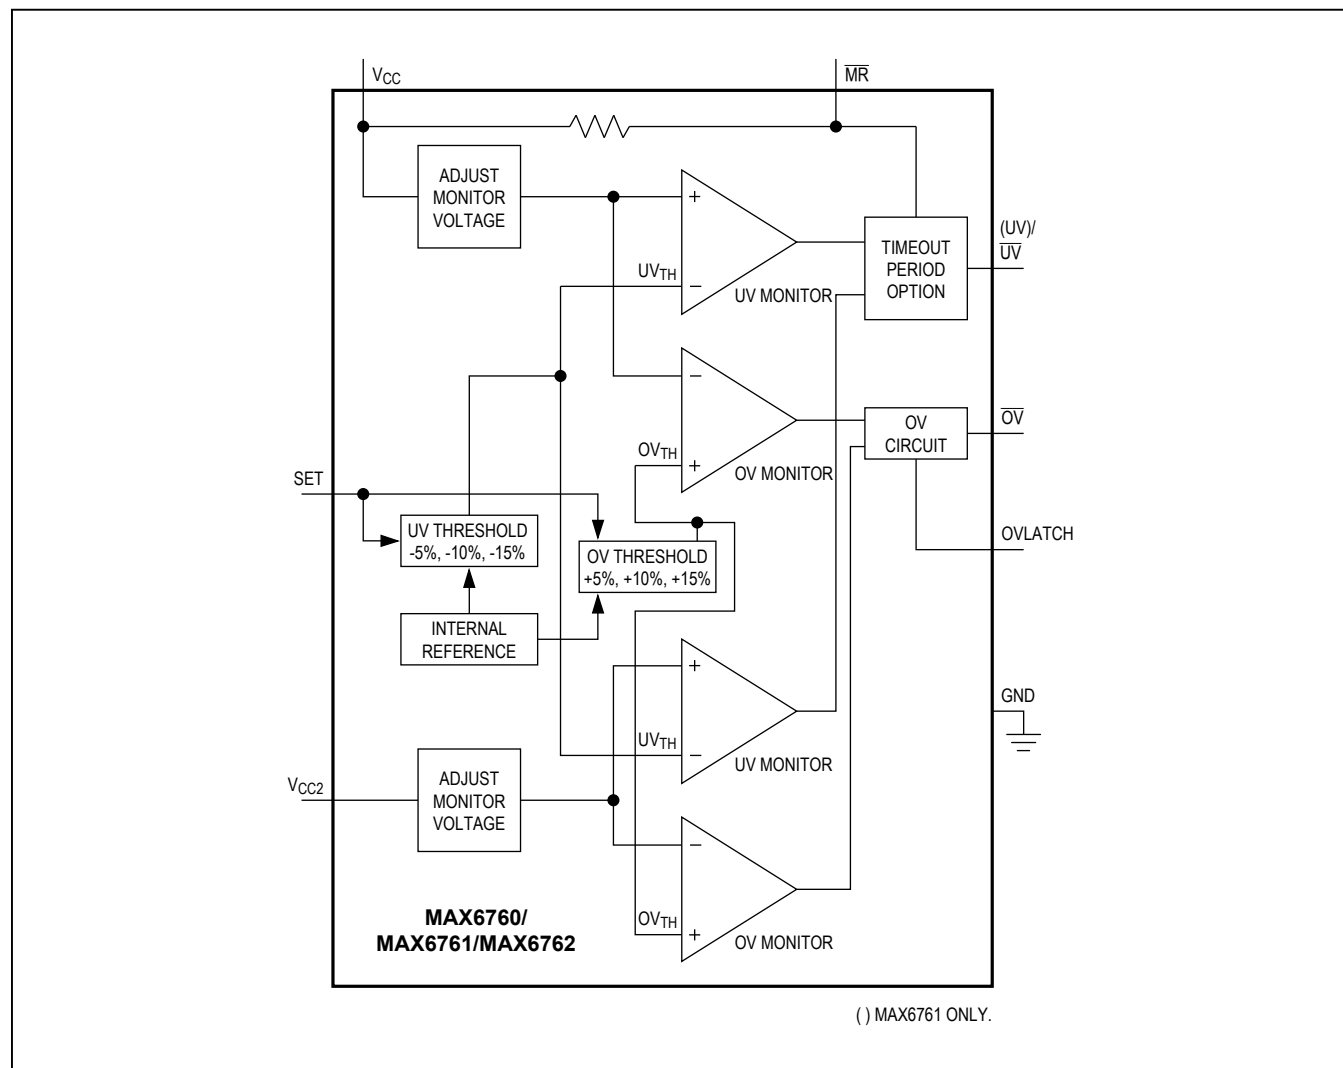


Figure 3. MAX6760/MAX6761/MAX6762 Functional Diagram

## Functional Diagrams (continued)

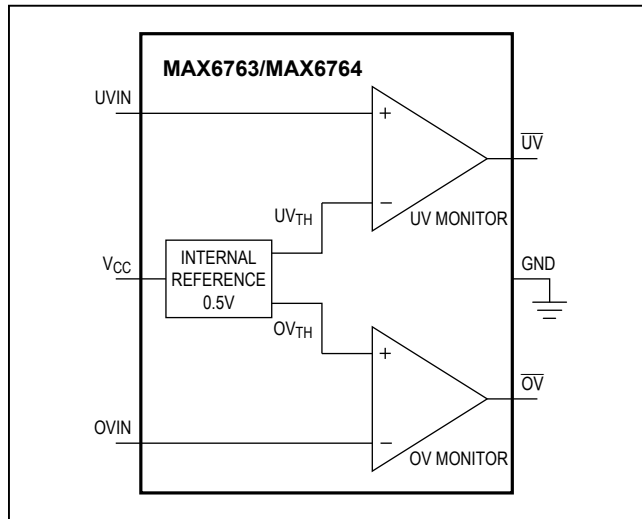


Figure 4. MAX6763/MAX6764 Functional Diagram

## Detailed Description

The MAX6754–MAX6764 are low-power window voltage detectors capable of monitoring undervoltage and overvoltage conditions on system power supplies. Whenever a monitored voltage falls below its undervoltage threshold or exceeds its overvoltage threshold, these devices assert their outputs to notify the system (see [Functional Diagrams](#)).

The MAX6754/MAX6755/MAX6756 are single-voltage window detectors with internally fixed nominal voltage, externally adjustable set window, single reset undervoltage/overvoltage output, and a manual reset input.

The MAX6757/MAX6758/MAX6759 are single-voltage window detectors with internally set nominal voltage, externally adjustable set window, separate undervoltage/overvoltage outputs, and manual reset input.

The MAX6760/MAX6761/MAX6762 are dual-voltage window detectors with internally/externally set nominal voltages, externally adjustable set window, separate undervoltage/overvoltage outputs, manual reset input, and overvoltage latch functions.

The MAX6763/MAX6764 are single adjustable window detectors with separate under/overvoltage outputs.

The MAX6754–MAX6762 offer factory-fixed voltage thresholds for monitoring system voltages from 0.9V to 5V. The MAX6754–MAX6762 include a SET function to select the window voltage to  $\pm 5\%$ ,  $\pm 10\%$ , or  $\pm 15\%$ . The MAX6763/MAX6764 allow for externally adjustable upper and lower voltage thresholds to be set externally (down to 0.5V). The MAX6754–MAX6762 are available with two timing options (20 $\mu$ s propagation delay or 100ms minimum reset timeout).

## Supply Voltages

VCC is the power-supply input and the monitored voltage of the MAX6754–MAX6762. These devices feature a factory-trimmed VCC and VCC2 divider that sets the nominal input range (see [Table 1](#) and [Table 2](#)). VCC for the MAX6763/MAX6764 is the power supply of the device and not the monitored voltage. For noisy systems, bypass VCC and VCC2 each with a 0.1 $\mu$ F capacitor to GND.

## Setting the Adjustable Nominal Voltage Threshold

The MAX6760/MAX6761/MAX6762 (versions with suffixes LA, TA, RA, ZA, WA, and AA) offer adjustable nominal voltage threshold to monitor VCC2. Use an external voltage-divider to set the voltage at VCC2 to 0.4255V. Configure SET to select a monitor window of  $\pm 5\%$ ,  $\pm 10\%$ , or  $\pm 15\%$  (see [Figure 5](#)). The MAX6760/MAX6761/MAX6762 suffix AA monitor only VCC2 and do not monitor VCC.

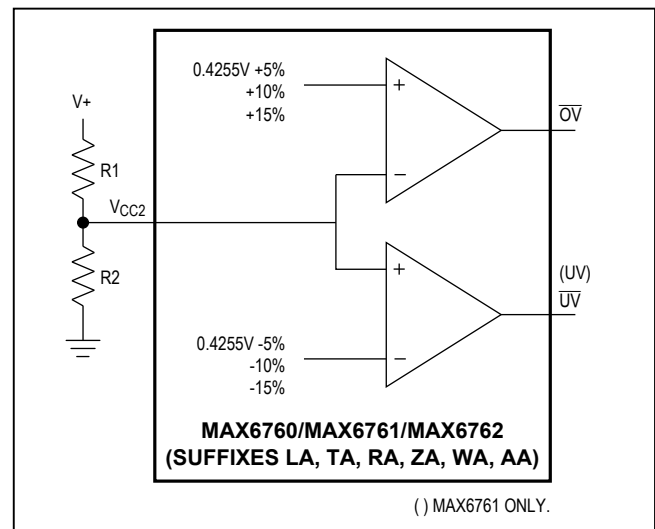


Figure 5. Setting the Threshold Voltage of VCC2

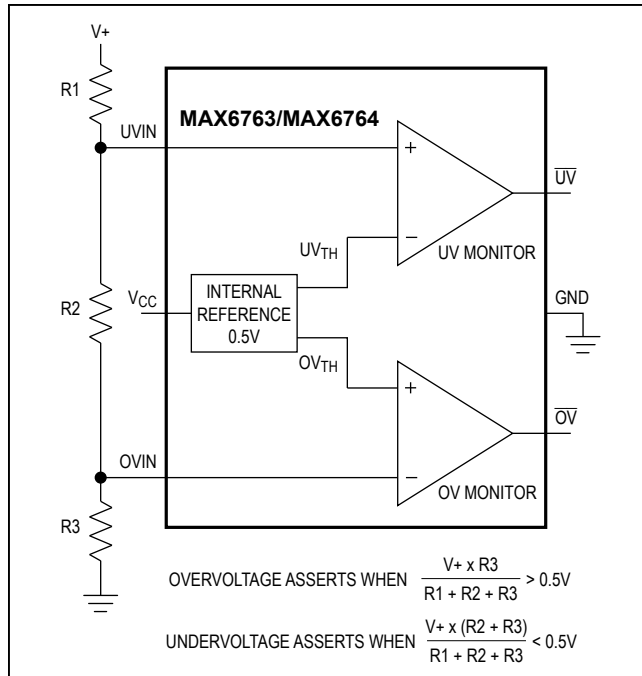


Figure 6. Setting the Under/Overvoltage Window

Choose R2 to have a resistance of up to 500kΩ. Calculate R1 by:

$$R1 = ((V+ - 0.4255V) \times R2) / 0.4255V$$

The MAX6763/MAX6764 provide inputs to a window detector allowing the programming of the threshold voltage to within V<sub>CC</sub> (see [Figure 6](#)).

Choose R1, R2, and R3 such that:

$$(V+ / (R1 + R2 + R3)) \geq 1\mu A$$

## SET

The MAX6754–MAX6762 allow the setting of the window voltage range of the voltage detector. Connect SET to GND to set a ±5% window. Connect SET to V<sub>CC</sub> for a ±10% window. Bias SET to V<sub>CC</sub> / 2 for a ±15% window.

## Manual Reset ( $\overline{MR}$ )

The MAX6754–MAX6762 include an active-low manual reset input. Drive  $\overline{MR}$  low to assert a reset output (MAX6754/MAX6755/MAX6756) or an undervoltage output (MAX6757/MAX6758/MAX6759). The output remains asserted for the specified propagation delay time (see [Figure 7a](#) and [Figure 7b](#)) after  $\overline{MR}$  goes high.  $\overline{MR}$  is internally pulled to V<sub>CC</sub> with a 26kΩ resistor.

## Overvoltage Latch Control Input (OVLATCH)

The MAX6760/MAX6761/MAX6762 provide an overvoltage latch control input (OVLATCH). Drive OVLATCH high to latch the overvoltage output for any V<sub>CC</sub> or V<sub>CC2</sub> overvoltage condition. Drive OVLATCH low to clear the latch after overvoltage conditions have been removed. The latch is transparent when OVLATCH is connected to GND. OVLATCH is a high impedance input. Use external pullup or pulldown.

## Reset, Undervoltage, and Overvoltage Outputs ( $\overline{RESET}$ , $\overline{RESET}$ , $\overline{UV}$ , UV, OV)

$\overline{RESET}$ ,  $\overline{RESET}$ ,  $\overline{UV}$ , UV, and OV outputs assert when the monitored supply is below the selected UV<sub>TH</sub> threshold or above the selected OV<sub>TH</sub> threshold. The reset output deasserts after the specified timeout period when the monitored supply rises above the UV<sub>TH</sub> threshold or drops below the OV<sub>TH</sub> threshold. The push-pull versions are referenced to V<sub>CC</sub>.

The MAX6760/MAX6761/MAX6762 monitor both V<sub>CC</sub> and V<sub>CC2</sub>. An undervoltage/overvoltage condition on either voltage supply asserts the corresponding output.  $\overline{RESET}$  and  $\overline{UV}$  are guaranteed to be in the correct logic state when V<sub>CC</sub> or V<sub>CC2</sub> > 1V.

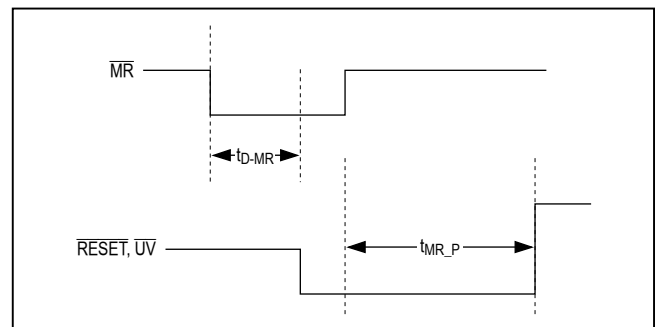
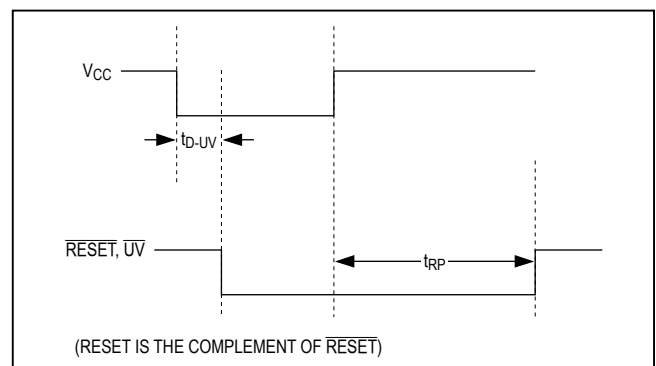


Figure 7a. Manual Reset/Reset Timing Diagram

Figure 7b. V<sub>CC</sub>/RESET, UV Timing Diagram

Applications Information

Microprocessor Monitoring

Figure 8 shows a microprocessor monitoring circuit. An overvoltage condition on either the core or I/O supply

turns the SCR on, blowing the fuse to disconnect the circuit from the power source. An optional capacitor (C1) on the gate of the SCR provides additional transient immunity against nuisance trips.

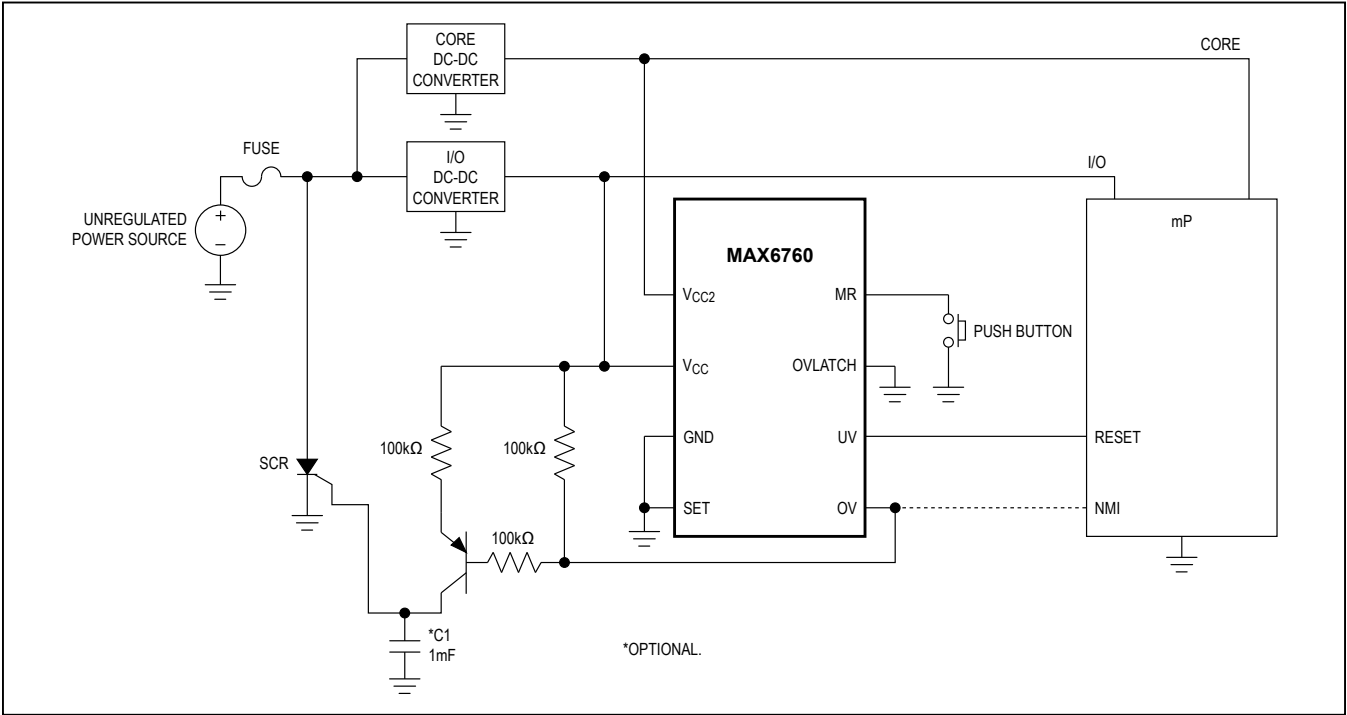


Figure 8. Microprocessor Monitoring

Selector Guide

|         | PUSH-PULL<br>RESET | PUSH-PULL<br>RESET | OPEN-DRAIN<br>RESET | PUSH-PULL<br>UV | PUSH-PULL<br>UV | OPEN-DRAIN<br>UV | PUSH-PULL<br>OV | OPEN-DRAIN<br>OV |
|---------|--------------------|--------------------|---------------------|-----------------|-----------------|------------------|-----------------|------------------|
| MAX6754 | X                  | —                  | —                   | —               | —               | —                | —               | —                |
| MAX6755 | —                  | X                  | —                   | —               | —               | —                | —               | —                |
| MAX6756 | —                  | —                  | X                   | —               | —               | —                | —               | —                |
| MAX6757 | —                  | —                  | —                   | X               | —               | —                | —               | X                |
| MAX6758 | —                  | —                  | —                   | —               | X               | —                | —               | X                |
| MAX6759 | —                  | —                  | —                   | —               | —               | X                | —               | X                |
| MAX6760 | —                  | —                  | —                   | X               | —               | —                | —               | X                |
| MAX6761 | —                  | —                  | —                   | —               | X               | —                | —               | X                |
| MAX6762 | —                  | —                  | —                   | —               | —               | X                | —               | X                |
| MAX6763 | —                  | —                  | —                   | X               | —               | —                | X               | —                |
| MAX6764 | —                  | —                  | —                   | —               | —               | X                | —               | X                |

**Table 1. Window Threshold Voltage  
Suffix Guide Single Fixed V<sub>CC</sub>  
(MAX6754–MAX6759)**

| PART NO. SUFFIX | V <sub>CC</sub> NOMINAL SYSTEM VOLTAGE (V) |
|-----------------|--------------------------------------------|
| L               | 5.0                                        |
| T               | 3.3                                        |
| R               | 3.0                                        |
| Z               | 2.5                                        |
| W               | 1.8                                        |

**Table 2. Window Threshold Voltage  
Suffix Guide Dual Fixed/Adjustable  
(MAX6760/MAX6761/MAX6762)**

| PART NO. SUFFIX | V <sub>CC</sub> NOMINAL SYSTEM VOLTAGE (V) | V <sub>CC2</sub> NOMINAL SYSTEM VOLTAGE (V) |
|-----------------|--------------------------------------------|---------------------------------------------|
| LT              | 5                                          | 3.3                                         |
| LR              | 5                                          | 3.0                                         |
| LA              | 5                                          | ADJ*                                        |
| TZ              | 3.3                                        | 2.5                                         |
| TW              | 3.3                                        | 1.8                                         |
| TI              | 3.3                                        | 1.5                                         |
| TG              | 3.3                                        | 1.2                                         |
| TE              | 3.3                                        | 0.9                                         |
| TA              | 3.3                                        | ADJ*                                        |
| RZ              | 3.0                                        | 2.5                                         |
| RW              | 3.0                                        | 1.8                                         |
| RI              | 3.0                                        | 1.5                                         |
| RG              | 3.0                                        | 1.2                                         |
| RE              | 3.0                                        | 0.9                                         |
| RA              | 3.0                                        | ADJ*                                        |
| ZW              | 2.5                                        | 1.8                                         |
| ZI              | 2.5                                        | 1.5                                         |
| ZG              | 2.5                                        | 1.2                                         |
| ZE              | 2.5                                        | 0.9                                         |
| ZA              | 2.5                                        | ADJ*                                        |
| WI              | 1.8                                        | 1.5                                         |
| WG              | 1.8                                        | 1.2                                         |
| WE              | 1.8                                        | 0.9                                         |
| WA              | 1.8                                        | ADJ*                                        |
| AA              | —                                          | ADJ*                                        |

\*See the Setting the Adjustable Nominal Voltage Threshold section.

**Table 3. Timeout Period Suffix Guide**

| TIMEOUT PERIOD SUFFIX | ACTIVE TIMEOUT PERIOD |          |          |
|-----------------------|-----------------------|----------|----------|
|                       | MIN (ms)              | Typ (ms) | MAX (ms) |
| D0                    | —                     | 0.02     | —        |
| D3                    | 100                   | 185      | 320      |

**Ordering Information (continued)**

| PART             | TEMP RANGE      | PIN-PACKAGE |
|------------------|-----------------|-------------|
| MAX6759UT_D_IV-T | -40°C to +125°C | 6 SOT23-6   |
| MAX6760TA__D_-T  | -40°C to +125°C | 8 TDFN-EP   |
| MAX6761TA__D_-T  | -40°C to +125°C | 8 TDFN-EP   |
| MAX6762TA__D_-T  | -40°C to +125°C | 8 TDFN-EP   |
| MAX6763UT-T      | -40°C to +125°C | 6 SOT23-6   |
| MAX6764UT-T      | -40°C to +125°C | 6 SOT23-6   |

Insert the threshold level suffixes for V<sub>CC</sub> and V<sub>CC2</sub> (Tables 1 and 2) after UK, UT, or TA. For the MAX6754–MAX6759, insert only the V<sub>CC</sub> threshold suffix after the UK or UT. Insert the reset timeout delay (Table 3) after D to complete the part number. For example, the MAX6760TALTD3-T provides a V<sub>CC</sub> threshold of 5V, a V<sub>CC2</sub> threshold of 3.3V, and a 100ms minimum reset timeout period. Sample stock is generally held on standard versions only (see the Standard Versions table). Standard versions have an order increment requirement of 2500 pieces. Nonstandard versions have an order increment requirement of 10,000 pieces. Contact factory for availability.

Devices are available in both leaded and lead-free packaging. Specify lead-free by replacing “-T” with “+T” when ordering.

IV denotes an automotive qualified part.




## Standard Versions Table

| PART                  |
|-----------------------|
| <b>MAX6754</b> UKLD0  |
| MAX6754UKLD3          |
| MAX6754UKTD0          |
| MAX6754UKTD3          |
| MAX6754UKZD0          |
| MAX6754UKZD3          |
| MAX6754UKWD0          |
| MAX6754UKWD3          |
| <b>MAX6755</b> UKLD0  |
| MAX6755UKLD3          |
| MAX6755UKTD0          |
| MAX6755UKTD3          |
| MAX6755UKZD0          |
| MAX6755UKZD3          |
| MAX6755UKWD0          |
| MAX6755UKWD3          |
| <b>MAX6756</b> UKLD0  |
| MAX6756UKLD3          |
| MAX6756UKTD0          |
| MAX6756UKTD3          |
| MAX6756UKZD0          |
| MAX6756UKZD3          |
| MAX6756UKWD0          |
| MAX6756UKWD3          |
| <b>MAX6757</b> UTTD0  |
| MAX6757UTTD3          |
| MAX6757UTLD0          |
| MAX6757UTLD3          |
| MAX6757UTZD0          |
| MAX6757UTZD3          |
| MAX6757UTWD0          |
| MAX6757UTWD3          |
| <b>MAX6758</b> UTLD0  |
| MAX6758UTLD3          |
| MAX6758UTTD0          |
| MAX6758UTTD3          |
| MAX6758UTZD0          |
| MAX6758UTZD3          |
| MAX6758UTWD0          |
| MAX6758UTWD3          |
| <b>MAX6759</b> UTLD0  |
| MAX6759UTLD3          |
| MAX6759UTTD0          |
| MAX6759UTTD3          |
| MAX6759UTZD0          |
| MAX6759UTZD3          |
| MAX6759UTWD0          |
| MAX6759UTWD3          |
| <b>MAX6760</b> TALTD3 |
| MAX6760TALAD3         |
| MAX6760TATZD3         |

| PART                  |
|-----------------------|
| MAX6760TATWD3         |
| MAX6760TATAD3         |
| MAX6760TARAD3         |
| MAX6760TAZWD3         |
| MAX6760TAZAD3         |
| MAX6760TAWED3         |
| MAX6760TAWAD3         |
| <b>MAX6761</b> TALTD3 |
| MAX6761TALAD3         |
| MAX6761TATZD3         |
| MAX6761TATWD3         |
| MAX6761TATAD3         |
| MAX6761TARAD3         |
| MAX6761TAZWD3         |
| MAX6761TAZAD3         |
| MAX6761TAWED3         |
| MAX6761TAWAD3         |
| <b>MAX6762</b> TALTD3 |
| MAX6762TALAD3         |
| MAX6762TATZD3         |
| MAX6762TATWD3         |
| MAX6762TATAD3         |
| MAX6762TARAD3         |
| MAX6762TAZWD3         |
| MAX6762TAZAD3         |
| MAX6762TAWED3         |
| MAX6762TAWAD3         |
| <b>MAX6763</b> UT     |
| <b>MAX6764</b> UT     |

Pin Configurations

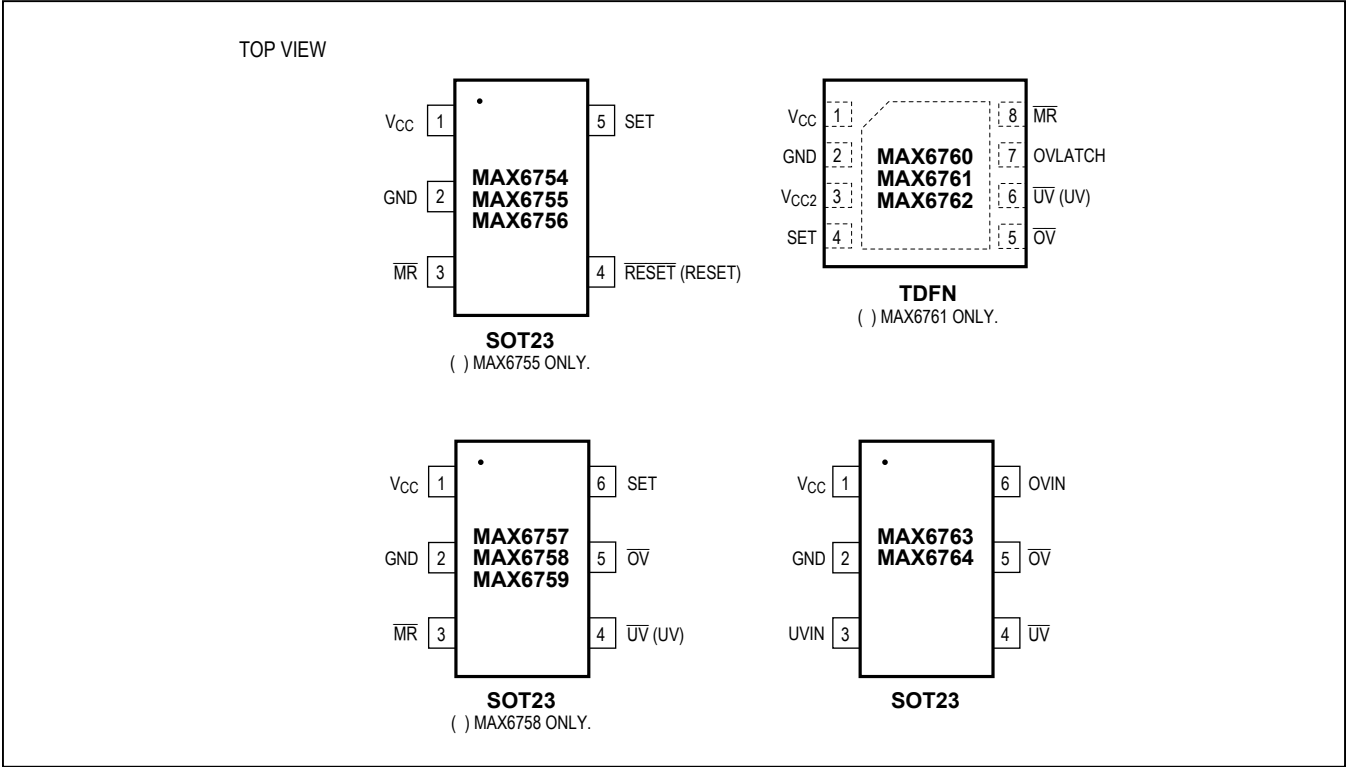

Chip Information

PROCESS: BiCMOS

**Package Information**

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a “+”, “#”, or “.” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 5 SOT23      | U5+1         | <a href="#">21-0057</a> | <a href="#">90-0174</a> |
| 6 SOT23      | U6-1         | <a href="#">21-0058</a> | <a href="#">90-0175</a> |
| 8 TDFN       | T833-2       | <a href="#">21-0137</a> | <a href="#">90-0059</a> |

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                                                                                         | PAGES<br>CHANGED |
|--------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| 4                  | 1/11             | Added <i>I<sub>V</sub></i> to the MAX6759 <i>Ordering Information</i> and added soldering temperature in the <i>Absolute Maximum Rating</i> section | 2, 16            |
| 5                  | 10/15            | Adding <i>I<sub>V</sub></i> part number of MAX6756 to data sheet                                                                                    | 1, 16–18         |
| 6                  | 11/15            | Updated package code for 5 SOT23 in <i>Ordering Information</i> section                                                                             | 19               |
| 7                  | 3/16             | Re-added <i>Standard Versions</i> table                                                                                                             | 17–18            |
| 8                  | 6/16             | Removed top mark information from <i>Standard Versions</i> table                                                                                    | 17–18            |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the *Electrical Characteristics* table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Maxim Integrated:

[MAX6754UKLD0+T](#) [MAX6754UKLD3+T](#) [MAX6754UKRD0+T](#) [MAX6754UKRD3+T](#) [MAX6754UKTD0+T](#)  
[MAX6754UKTD3+T](#) [MAX6754UKWD0+T](#) [MAX6754UKWD3+T](#) [MAX6754UKZD0+T](#) [MAX6754UKZD3+T](#)  
[MAX6755UKLD0+T](#) [MAX6755UKLD3+T](#) [MAX6755UKRD0+T](#) [MAX6755UKRD3+T](#) [MAX6755UKTD0+T](#)  
[MAX6755UKTD3+T](#) [MAX6755UKWD0+T](#) [MAX6755UKWD3+T](#) [MAX6755UKZD0+T](#) [MAX6755UKZD3+T](#)  
[MAX6756UKLD0+T](#) [MAX6756UKLD3+T](#) [MAX6756UKRD0+T](#) [MAX6756UKRD3+T](#) [MAX6756UKTD0+T](#)  
[MAX6756UKTD3+T](#) [MAX6756UKWD0+T](#) [MAX6756UKWD3+T](#) [MAX6756UKZD0+T](#) [MAX6756UKZD3+T](#)  
[MAX6757UTLD0+T](#) [MAX6757UTLD3+T](#) [MAX6757UTRD0+T](#) [MAX6757UTRD3+T](#) [MAX6757UTTD0+T](#)  
[MAX6757UTTD3+T](#) [MAX6757UTWD0+T](#) [MAX6757UTWD3+T](#) [MAX6757UTZD0+T](#) [MAX6757UTZD3+T](#)  
[MAX6758UTLD0+T](#) [MAX6758UTLD3+T](#) [MAX6758UTRD0+T](#) [MAX6758UTRD3+T](#) [MAX6758UTTD0+T](#)  
[MAX6758UTTD3+T](#) [MAX6758UTWD0+T](#) [MAX6758UTWD3+T](#) [MAX6758UTZD0+T](#) [MAX6758UTZD3+T](#)  
[MAX6759UTLD0+T](#) [MAX6759UTLD3+T](#) [MAX6759UTRD0+T](#) [MAX6759UTRD3+T](#) [MAX6759UTTD0+T](#)  
[MAX6759UTTD3+T](#) [MAX6759UTWD0+T](#) [MAX6759UTWD3+T](#) [MAX6759UTZD0+T](#) [MAX6759UTZD3+T](#)  
[MAX6760TAAAD0+T](#) [MAX6760TAAAD3+T](#) [MAX6760TALAD0+T](#) [MAX6760TALAD3+T](#) [MAX6760TALRD0+T](#)  
[MAX6760TALRD3+T](#) [MAX6760TALTD0+T](#) [MAX6760TALTD3+T](#) [MAX6760TARAD0+T](#) [MAX6760TARAD3+T](#)  
[MAX6760TARED0+T](#) [MAX6760TARED3+T](#) [MAX6760TARGD0+T](#) [MAX6760TARGD3+T](#) [MAX6760TARID0+T](#)  
[MAX6760TARID3+T](#) [MAX6760TARWD0+T](#) [MAX6760TARWD3+T](#) [MAX6760TARZD0+T](#) [MAX6760TARZD3+T](#)  
[MAX6760TATAD0+T](#) [MAX6760TATAD3+T](#) [MAX6760TATED0+T](#) [MAX6760TATED3+T](#) [MAX6760TATGD0+T](#)  
[MAX6760TATGD3+T](#) [MAX6760TATID0+T](#) [MAX6760TATID3+T](#) [MAX6760TATWD0+T](#) [MAX6760TATWD3+T](#)  
[MAX6760TATZD0+T](#) [MAX6760TATZD3+T](#) [MAX6760TAWAD0+T](#) [MAX6760TAWAD3+T](#) [MAX6760TAWED0+T](#)  
[MAX6760TAWED3+T](#) [MAX6760TAWGD0+T](#) [MAX6760TAWGD3+T](#) [MAX6760TAWID0+T](#) [MAX6760TAWID3+T](#)