

## PST 1,0/11-3,5 R56

Order No.: 1720291

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1720291>

Header, Nominal current: 8 A, Rated voltage (III/2): 250 V, Number of positions: 11, Pitch: 3.5 mm, Color: black, Assembly: Taped SMD/THT/THR components, Voltage and current depend on the plug-in terminal block used.

### Commercial data

GTIN (EAN)	
Note	Made-to-order
sales group	E431
Pack	250 pcs.
Customs tariff	85366990
Catalog page information	Page 537 (CC-2011)

### Product notes

WEEE/RoHS-compliant since:  
12/14/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

Length	2.8 mm
Pitch	3.5 mm
Dimension a	35 mm

Number of positions	11
Pin dimensions	1 mm
Pin spacing	3.50 mm
Hole diameter	1.2 mm

**Technical data**

Range of articles	PST 1,0/..-V
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	8 A (depends on the plug used)
Nominal voltage $U_N$	160 V
Maximum load current	8 A (depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Color	Black
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	10 A

**Certificates / Approvals**




Certification

CCA, CUL, GOST, SEV, UL

## Diagrams/Drawings

### Dimensioned drawing

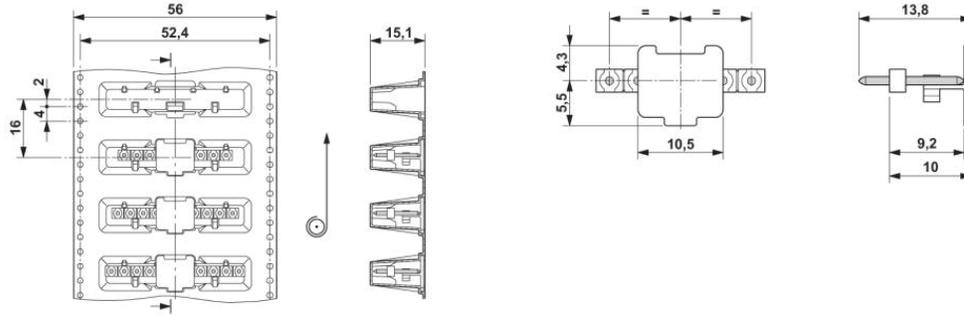

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;