



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Changed HDMI/M Mold Design /	03-12-07	DP
	Changed Cable Spec /		
	Changed From Crimp Terminal to Solder Terminal		
B	Updated Specifications	09-08-11	LY
C	Updated Graphics, Notes, and Pin out	02-07-14	LY

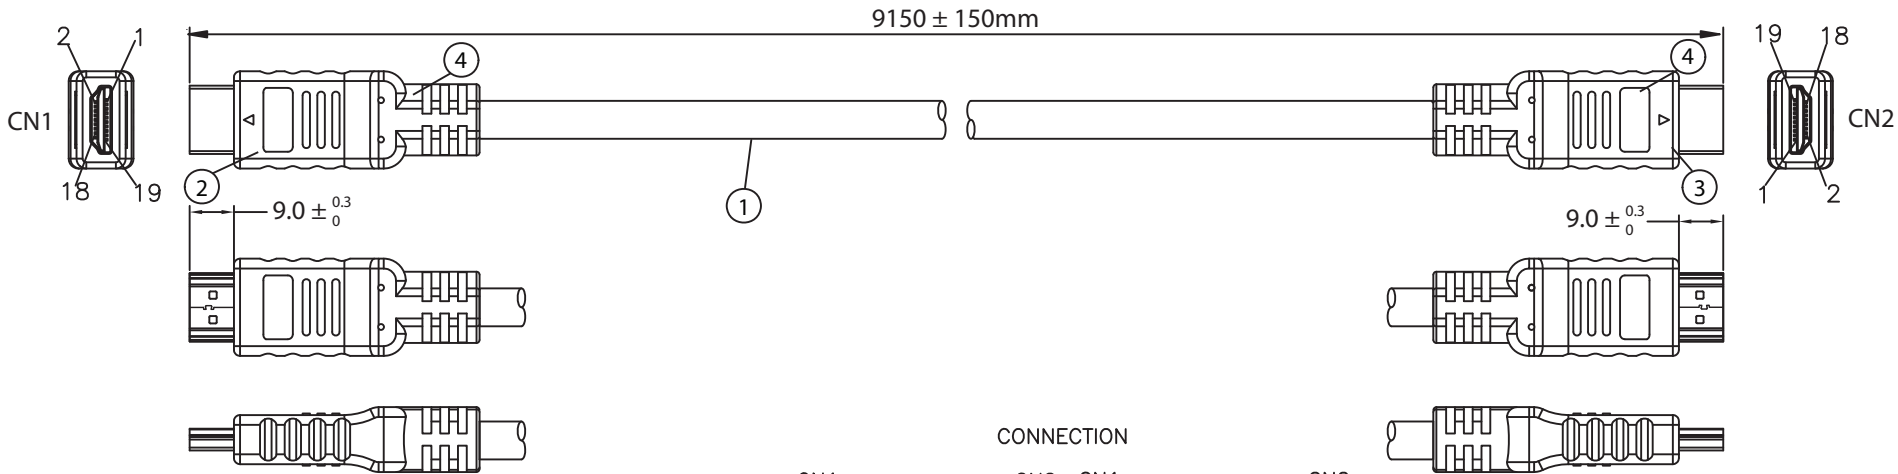

CONNECTION

CN1	CN2	CN1	CN2
1 — WHITE	1 — VIOLET	13 — VIOLET	13
3 — BROWN	3 — WHITE	14 — WHITE	14
2 — DRAIN	2 — 15 — YELLOW	15 — YELLOW	15
4 — WHITE	4 — 16 — ORANGE	16 — ORANGE	16
6 — RED	6 — 17 — GRAY	17 — GRAY	17
5 — DRAIN	5 — 18 — BLACK	18 — BLACK	18
7 — WHITE	7 — 19 — RED	19 — RED	19
9 — GREEN	9 — SHELL — DRAIN & BRAID	SHELL — DRAIN & BRAID	SHELL
8 — DRAIN	8		
10 — WHITE	10		
12 — BLUE	12		
11 — DRAIN	11		

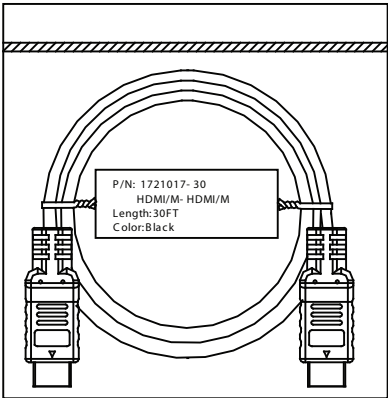

NOTES:

1. CABLE: UL20276
(24AWG*1PR+EAM)*4+24AWG*1PR+24AWG*5C+AEB (AL) 65%
OUTER JACKET: BLACK, OD: 9.5 ± 0.2mm
2. CONNECTOR: HDMI A 19P MALE
INSULATOR: BLACK PBT
PIN G/F
NICKEL PLATED SHELL
3. CONNECTOR: HDMI A 19P MALE
INSULATOR: BLACK PBT
PIN G/F
NICKEL PLATED SHELL
4. PVC MOLDED: 45P BLACK
5. ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: AC 300V DC300V 10M ohm MIN.
<3>.CONDUCTOR RESISTANCE: 5 ohm MAX.
6. 1PC/POLYBAG

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number: 1721017-30		RoHS Compliant
0-1	0.15	Description: HDMI/M - HDMI/M		
1-6	0.20			
6-18	0.30	Drawn / Date B.Grubb 01-25-07	UNIT: mm	REV. C
18-50	0.50		Checked / Date	Approved / Date
50-120	0.70			
120-250	0.90			
250-500	1.20			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qualtek:](#)

[1721017-30](#)