

Manual Switches

Electronic Control Rocker Switches

MML24 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY



PWB Mount



Panel Mount



PWB Mount
(Lighted rocker)

FEATURES


- Accepts one or two LEDs or incandescent lamps which are ordered separately
- Printed wiring board mounting or snap-in panel mounting
- Bezels and mounting clips can be furnished installed or ordered separately
- UL recognized, CSA certified

MML24 ORDER GUIDE (Catalog listing for switch, less assembled display options)

MML24K	A	3	AA
Housing Type	Mounting	Terminals	Circuitry
MML24K Black housing	A No bezel (PWB mounting) K Black bezel, mtg. clip/long sides	3 Printed wiring board 2 Solder	Insert code letters from Circuitry Chart


Electrical Data page 69
Bezels page 84
Strip and matrix mounting page 83
Mounting dimensions pages 97/98
PWB pin locations page 97
Rockers are permanently installed.

CIRCUITRY

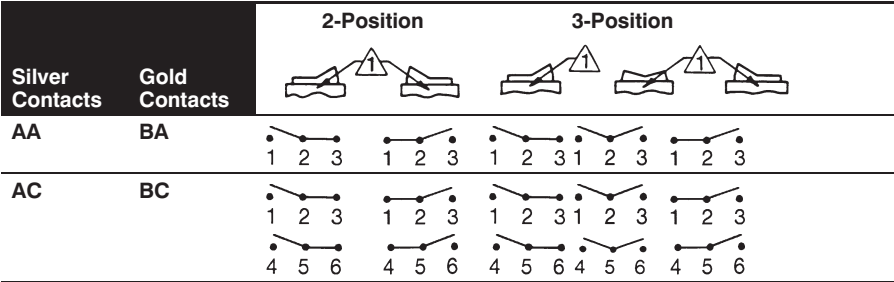

Example: MML24KA3AA01HDRXX
Electronic control rocker switch with black housing, printed wiring board terminals; 1 pole, silver contacts; 2-position, maintained action; one circuit ON in each position; black rocker, red lens for LED display in Side 1 and no lens in Side 2.

The "MICRO SWITCH" identification is shown on this side of the switch housings.

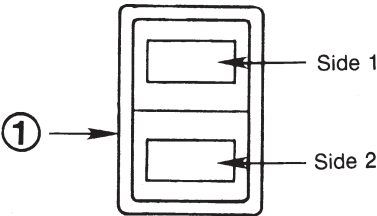

OPERATING ACTION

Table with 5 columns: Position, Code, Action 1, Action 2, Action 3. Rows include 2-Position (01, 02, 03) and 3-Position (04, 05, 07) with their respective actions like Maint., Mom., None.

Order display options assembled to switch by adding codes below.

01 Action: Insert code numbers from Operating Action Chart.
H Rocker: K Black rocker, non-lighted; H Black rocker, one lens*; F White rocker, one lens*.
DRXX Lens: Side 1 (LED display: DR Red, DY Yellow, DG Green; Incand. display: LR Red, LY Yellow, LG Green, LW White); Side 2 (LED display: DR Red, DY Yellow, DG Green; Incand. display: LR Red, LY Yellow, LG Green, LW White).
Leave blank, if legend not desired. Legend: 20 With legend. Use legend order sheet FO-74193 to cover each catalog listing (see page 82).

CUSTOMER INSTALLATION:
LED
1. Order LED and receptacle, page 85.
2. Installation instructions, pages 86/88.
Incandescent Lamp
1. Order lamp/PWB receptacle or lamp/solder receptacle, page 87.
2. Installation instructions, page 88.