

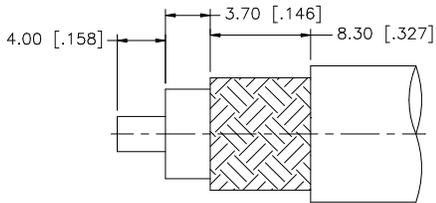
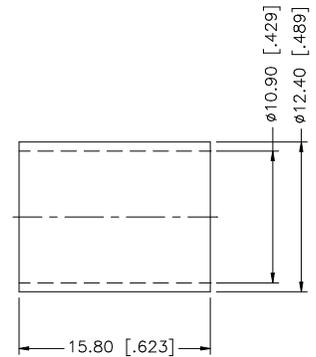


REV.	DATE	DESCRIPTION
NC	06/08/98	INITIAL RELEASE
A	01/11/07	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

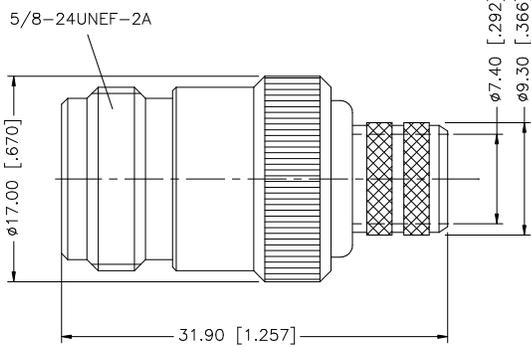

NOTE:

1. CRIMPED FERRULE HEX. CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX. CRIMP SIZE .118"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS; DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex
7						DRAWN G.R.S.	01/11/07	
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED		PART DESCRIPTION N REVERSE POLARITY CRIMP JACK (BELDEN 9913, LMR400)
5						ISSUED		
4	FERRULE	COPPER	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SHEET	1 OF 1	PART NO. 172203RP
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE	C:/172/172203RP.DWG	
2	INSULATOR	TEFLON	NATURAL	1		DWG. NO.	172203RP.DWG	REV. A
1	BODY	BRASS	NEXCOTE	1	DO NOT SCALE DRAWING			SIZE A
	DESCRIPTION	MATERIAL	FINISH	QTY				SCALE NA