




miniature plug in power transformers

SINGLE 115V PRIMARY TYPE PC 6 PINS


CSA Certification Available



BASIC SCHEMATIC



SERIES CONNECTED



PARALLEL CONNECTED



(See mechanical drawing for correct footprint)

PRIMARY 50/500 Hz		SECONDARY RMS RATING*		Size (VA)
Single 115V (6 Pin)	Dual 115/230V (8 Pin)	Series	Parallel	
PC 10-90	DPC 10-90	10V C.T. @ 90MA	5V @ 180MA	1.0
PC 10-120	DPC 10-120	10V C.T. @ 120MA	5V @ 240MA	1.2
PC 10-440	DPC 10-440	10V C.T. @ 440MA	5V @ 880MA	4.4
PC 10-1000	DPC 10-1000	10V C.T. @ 1A	5V @ 2A	10
PC 10-2400	DPC 10-2400	10V C.T. @ 2.4A	5V @ 4.8A	24
PC 12-70	DPC 12-70	12.6V C.T. @ 70MA	6.3V @ 140MA	1.0
PC 12-100	DPC 12-100	12.6V C.T. @ 100MA	6.3V @ 200MA	1.2
PC 12-350	DPC 12-350	12.6V C.T. @ 350MA	6.3V @ 700MA	4.4
PC 12-800	DPC 12-800	12.6V C.T. @ 800MA	6.3V @ 1.6A	10
PC 12-2000	DPC 12-2000	12.6V C.T. @ 2A	6.3V @ 4A	24
PC 16-55	DPC 16-55	16V C.T. @ 55MA	8V @ 110MA	1.0
PC 16-75	DPC 16-75	16V C.T. @ 75MA	8V @ 150MA	1.2
PC 16-260	DPC 16-260	16V C.T. @ 260MA	8V @ 520MA	4.4
PC 16-640	DPC 16-640	16V C.T. @ 640MA	8V @ 1.28A	10
PC 16-1500	DPC 16-1500	16V C.T. @ 1.5A	8V @ 3A	24
PC 20-45	DPC 20-45	20V C.T. @ 45MA	10V @ 90MA	1.0
PC 20-60	DPC 20-60	20V C.T. @ 60MA	10V @ 120MA	1.2
PC 20-220	DPC 20-220	20V C.T. @ 220MA	10V @ 440MA	4.4
PC 20-500	DPC 20-500	20V C.T. @ 500MA	10V @ 1A	10
PC 20-1200	DPC 20-1200	20V C.T. @ 1.2A	10V @ 2.4A	24
PC 24-35	DPC 24-35	24V C.T. @ 35MA	12V @ 70MA	1.0
PC 24-50	DPC 24-50	24V C.T. @ 50MA	12V @ 100MA	1.2
PC 24-180	DPC 24-180	24V C.T. @ 180MA	12V @ 360MA	4.4
PC 24-450	DPC 24-450	24V C.T. @ 450MA	12V @ 900MA	10
PC 24-1000	DPC 24-1000	24V C.T. @ 1A	12V @ 2A	24
PC 28-30	DPC 28-30	28V C.T. @ 30MA	14V @ 60MA	1.0
PC 28-40	DPC 28-40	28V C.T. @ 40MA	14V @ 80MA	1.2
PC 28-160	DPC 28-160	28V C.T. @ 160MA	14V @ 320MA	4.4
PC 28-360	DPC 28-360	28V C.T. @ 360MA	14V @ 720MA	10
PC 28-800	DPC 28-800	28V C.T. @ 800MA	14V @ 1.6A	24
PC 34-25	DPC 34-25	34V C.T. @ 25MA	17V @ 50MA	1.0
PC 34-35	DPC 34-35	34V C.T. @ 35MA	17V @ 70MA	1.2
PC 34-125	DPC 34-125	34V C.T. @ 125MA	17V @ 250MA	4.4
PC 34-300	DPC 34-300	34V C.T. @ 300MA	17V @ 600MA	10
PC 34-700	DPC 34-700	34V C.T. @ 700MA	17V @ 1.4A	24
PC 40-20	DPC 40-20	40V C.T. @ 20MA	20V @ 40MA	1.0
PC 40-30	DPC 40-30	40V C.T. @ 30MA	20V @ 60MA	1.2
PC 40-110	DPC 40-110	40V C.T. @ 110MA	20V @ 220MA	4.4
PC 40-250	DPC 40-250	40V C.T. @ 250MA	20V @ 500MA	10
PC 40-600	DPC 40-600	40V C.T. @ 600MA	20V @ 1.2A	24
PC 56-15	DPC 56-15	56V C.T. @ 15MA	28V @ 30MA	1.0
PC 56-20	DPC 56-20	56V C.T. @ 20MA	28V @ 40MA	1.2
PC 56-80	DPC 56-80	56V C.T. @ 80MA	28V @ 160MA	4.4
PC 56-180	DPC 56-180	56V C.T. @ 180MA	28V @ 360MA	10
PC 56-420	DPC 56-420	56V C.T. @ 420MA	28V @ 840MA	24
PC 120-8	DPC 120-8	120V C.T. @ 8MA	60V @ 16MA	1.0
PC 120-10	DPC 120-10	120V C.T. @ 10MA	60V @ 20MA	1.2
PC 120-35	DPC 120-35	120V C.T. @ 35MA	60V @ 70MA	4.4
PC 120-85	DPC 120-85	120V C.T. @ 85MA	60V @ 170MA	10
PC 120-200	DPC 120-200	120V C.T. @ 200MA	60V @ 400MA	24


* See Table on opposite page for method of determining RMS Secondary Current.

DUAL 115/230V PRIMARY TYPE DPC 8 PINS


CSA Certification Available



BASIC SCHEMATIC



SERIES CONNECTED



PARALLEL CONNECTED

(See mechanical drawing for correct footprint)

... for printed circuits applications


Signal has the most complete and diversified selection of miniature plug-in power transformers.

Primary ratings of 115V (Style PC - 6 Pin) or Dual 115/230V (Style DPC - 8 Pin) are standard for the entire line. 1500V. Hipot is standard.

Size 1.0 is used extensively where height is a limiting factor since its height of 0.83 inches allows 1 inch spacing of PC boards. Size 24 is unusual since 24 watt PC transformers are not readily available, especially with a height of 1 3/8 inches.

The RMS current ratings are based on a load regulation of 15-20% and not on temperature rise (except for the largest item, size 24). Therefore, these ratings may be exceeded without overheating, if the additional drop in full load voltage is acceptable. There is, of course, a limit and it would be best to check with our engineering department on specific units.

BLACK DOT ON LABEL INDICATES POSITION OF TERMINAL #1.



**SIZE 24
(24VA) UNIT
WITH 24-BR
SLIDE-ON
MOUNTING BRACKET**

METHOD OF DETERMINING SECONDARY CURRENT RATINGS


The secondary currents shown in the tables are RMS ratings. Depending upon rectifier circuit configurations, the RMS secondary current is different than the DC output current. This is indicated in the chart below:

Rectifier Type	Filter Type	RMS Secondary Current Is
Full Wave Center-Tap	Choke Input	= 0.7 x DC Amps
Full Wave Center-Tap	Capacitor Input	= 1 to 1.2 x DC Amps
Full Wave Bridge	Choke Input	= DC Amps
Full Wave Bridge	Capacitor Input	= 1.6 to 1.8 x DC Amps

For example, in a F.W. Bridge circuit with a capacitive filter, if the load is 1 Amp DC, the RMS Secondary current is 1.6 to 1.8 Amp RMS.

 Recognized Component
Underwriters Labs, Inc.


CSA Certification
Available

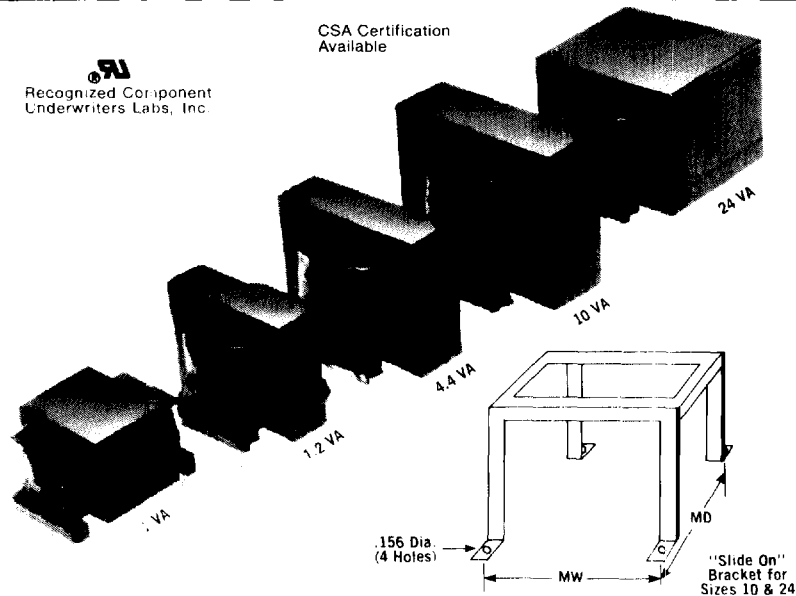


DIMENSIONS

Size (VA)	L	W	H	A-6 (6 Pin)	A-8 (8 Pin)	B	WT. (oz.)	OPTIONAL BRACKET* No.	MW	MD
1.0	1	1 3/8	0.83	0.250	0.200	1.200	2.5	—	—	—
1.2	1 3/8	1 3/8	1 1/8	0.312	0.200	1.000	3	—	—	—
4.4	1 5/8	1 1/4	1 3/8	0.400	0.250	1.100	5	—	—	—
10	1 7/8	1 1/2	1 5/8	0.400	0.250	1.300	9	10-BR	1 1/4	1 1/8
24	1 5/8	2 1/4	1 3/8	0.400	0.250	2.100	12	24-BR	1 3/8	2

* An optional "Slide On" Mounting Bracket is available for sizes 10 and 24. The brackets do not use up any extra "Floor Space" but add 1/2" to the height of the transformer.

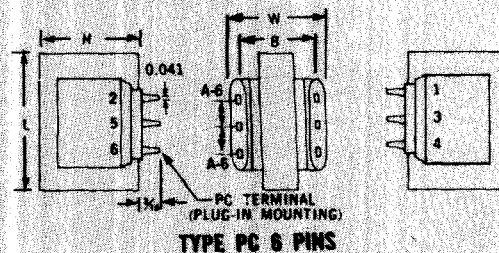

TYPE PC 6 PINS

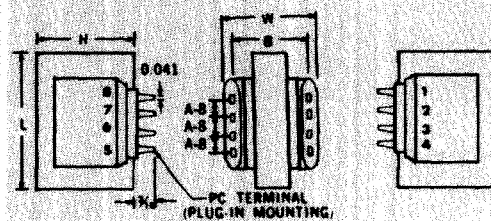

TYPE DPC 8 PINS