

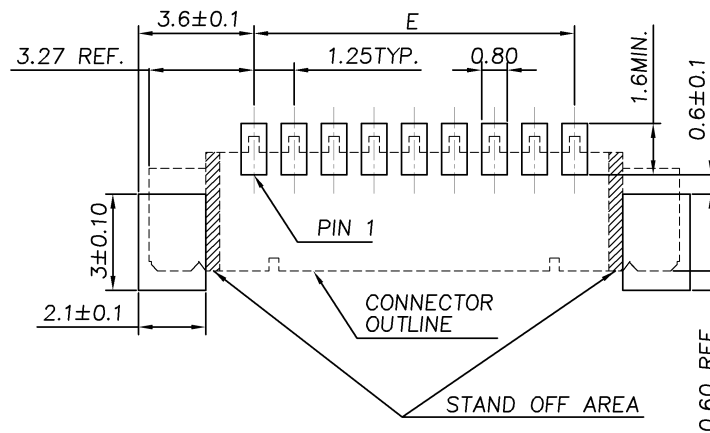




0.762um MIN. GOLD	17.50	18.60	19.30	20.50	24.04	15	4-1734260-5
	16.25	17.35	18.05	19.25	22.79	14	4-1734260-4
	15.00	16.10	16.80	18.00	21.54	13	4-1734260-3
	13.75	14.85	15.55	16.75	20.29	12	4-1734260-2
	12.50	13.60	14.30	15.50	19.04	11	4-1734260-1
	11.25	12.35	13.05	14.25	17.79	10	4-1734260-0
	10.00	11.10	11.80	13.00	16.54	9	3-1734260-9
	8.75	9.85	10.55	11.75	15.29	8	3-1734260-8
	7.50	8.60	9.30	10.50	14.04	7	3-1734260-7
	6.25	7.35	8.05	9.25	12.79	6	3-1734260-6
	5.00	6.10	6.80	8.00	11.54	5	3-1734260-5
	3.75	4.85	5.55	6.75	10.29	4	3-1734260-4
	2.50	3.60	4.30	5.50	9.04	3	3-1734260-3
	1.25	2.35	3.05	4.25	7.79	2	3-1734260-2
3.81um MIN. MATTE--TIN	17.50	18.60	19.30	20.50	24.04	15	1-1734260-5
	16.25	17.35	18.05	19.25	22.79	14	1-1734260-4
	15.00	16.10	16.80	18.00	21.54	13	1-1734260-3
	13.75	14.85	15.55	16.75	20.29	12	1-1734260-2
	12.50	13.60	14.30	15.50	19.04	11	1-1734260-1
	11.25	12.35	13.05	14.25	17.79	10	1-1734260-0
	10.00	11.10	11.80	13.00	16.54	9	1734260-9
	8.75	9.85	10.55	11.75	15.29	8	1734260-8
	7.50	8.60	9.30	10.50	14.04	7	1734260-7
	6.25	7.35	8.05	9.25	12.79	6	1734260-6
	5.00	6.10	6.80	8.00	11.54	5	1734260-5
	3.75	4.85	5.55	6.75	10.29	4	1734260-4
	2.50	3.60	4.30	5.50	9.04	3	1734260-3
	1.25	2.35	3.05	4.25	7.79	2	1734260-2
PLATING	E	D	C	B	A	NO. OF CONTACTS	PART NUMBER

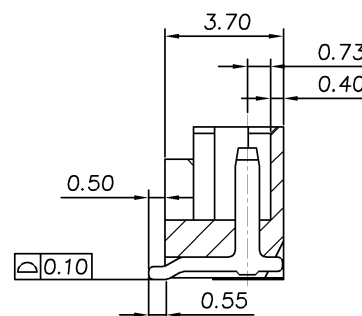

NOTE:

1. MATERIAL:
HOUSING: HIGH TEMP. THERMOPLASTIC, UL 94V-0, COLOR: NATURAL.
CONTACTS: PHOSPHOR BRONZE.
TAB: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: (SEE TABLE) OVER 50μ" MIN. NICKEL PLATED.
TAB: 100μ" MIN. MATTE-TIN OVER 50μ" MIN. NICKEL PLATED.
3. NO TE LOGO AND DATE CODE ON THE PRODUCT.
4. LOCKING WINDOW:
ONE PLACE FOR 2 AND 3 CONTACTS,
TWO PLACES FOR MORE THAN 3 CONTACTS.
5. RECOMMENDED PART NUMBER OF CABLE ASSEMBLY:
HOUSING: X-440146-X
CONTACT: 440147-X

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 29APR2005 A. WU CHK 29APR2005 S. HOU APVD 29APR2005 W.J. KE		 TE Connectivity	
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME	
		PRODUCT SPEC 108-57499		WIRE TO BOARD MALE HEADER, 1.25MM PITCH, SMT STRAIGHT TYPE.	
MATERIAL SEE NOTE		APPLICATION SPEC 		SIZE	CAGE CODE
FINISH SEE NOTE		WEIGHT SEE TABLE		DRAWING NO A3 00779	RESTRICTED TO C-1734260
		CUSTOMER DRAWING		SCALE -	SHEET 1 OF 2
				REV A	

D

C

B



A

D

C

B

A

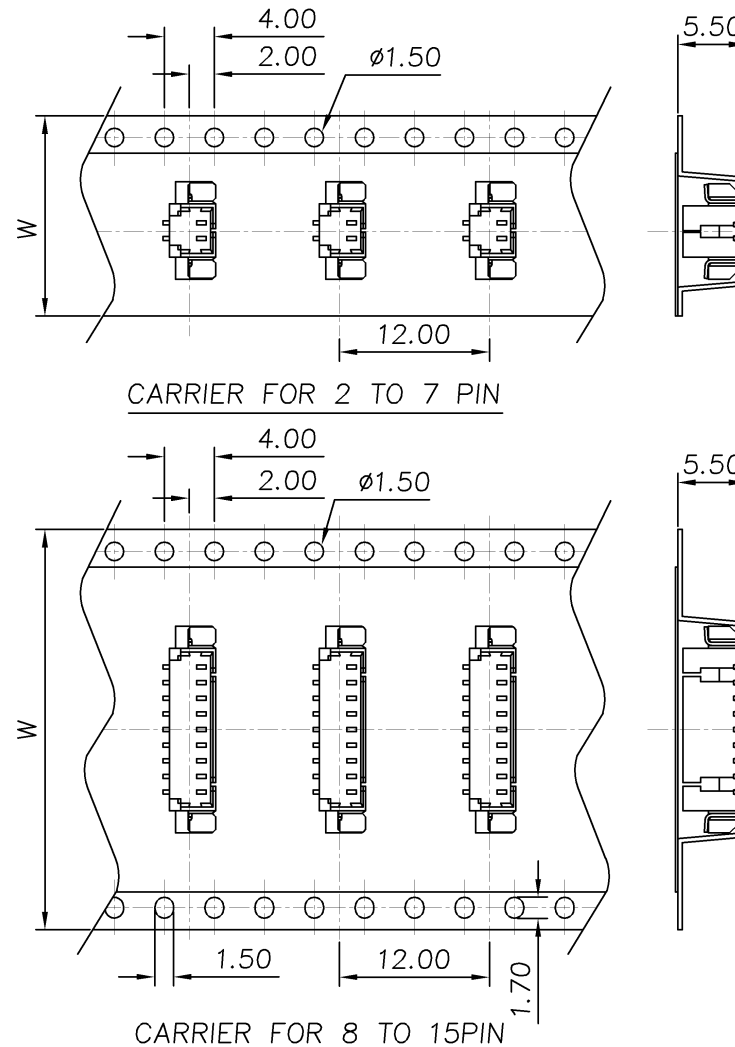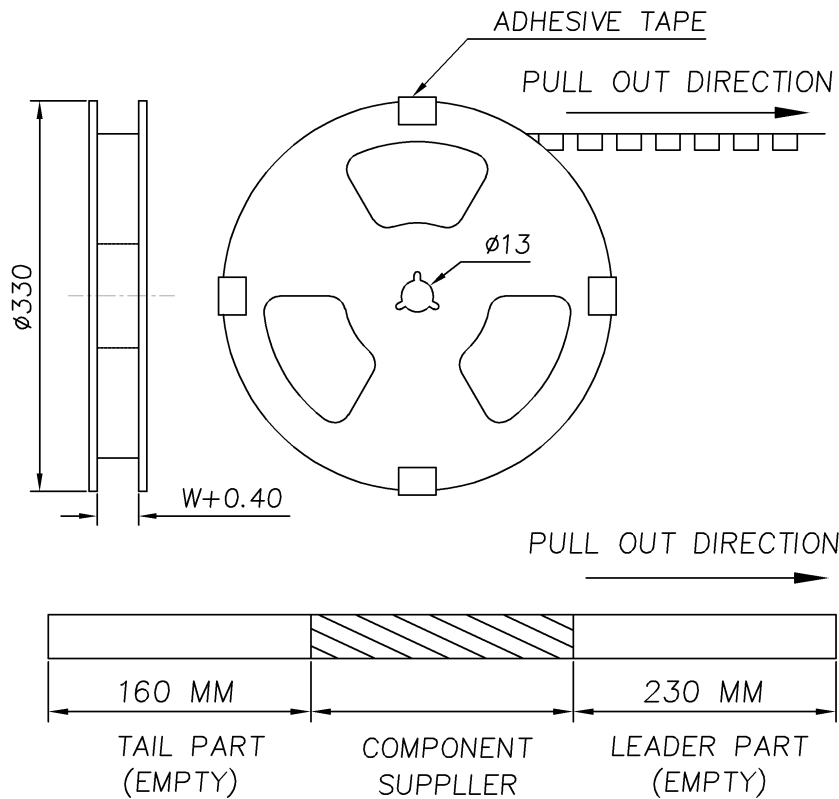

NOTE:
1. CARTON DIMENSIONS: 340 X 340 X 250

1000/REEL	4000	44.0	15
			14
			13
	6000	32.0	12
			11
			10
			9
			8
	7000	24.0	7
			6
			5
			4
	10000	16.0	3
			2
PACKING	QUANTITY	DIM W	NO. OF PIN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH
-

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

TE Connectivity

NAME
WIRE TO BOARD MALE HEADER,
1.25MM PITCH, SMT STRAIGHT TYPE.

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=1734260

RESTRICTED TO
-

SCALE
-

SHEET
2 OF 2

REV
A

AMP 1470-19 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1734260-6](#)