


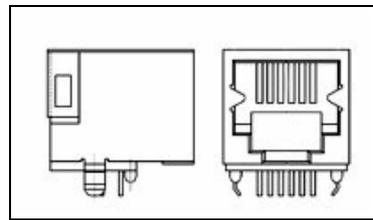

# 1734723-1 Product Details

[Share](#) [Print](#) [Email](#)


**1734723-1**

## PCB Mounted Jacks - Single Port, Multi-port and Stacked

Always EU RoHS/ELV Compliant (Statement of Compliance)

### Product Highlights:

- Connector
- Preloaded
- Single Port Configuration
- 1 x 1 Jack Configuration
- Jack Type = RJ25

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 1734723-1

Active

[View 3D PDF](#)
[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)

## Documentation & Additional Information

### Product Drawings:

- [MODULAR JACK, RJ11, 6P6C, SINGLE, DIP TYPE \(PDF, English\)](#)

### Catalog Pages/Data Sheets:

- None Available

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version A\)](#)
- [3D Model \(IGES, Version A\)](#)
- [3D Model \(STEP, Version A\)](#)

[List all Documents](#)

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- Product Type = Connector
- Jack Type = RJ25
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Performance Category = Cat 3
- LED = Without
- Grounding Options = PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black

### Mechanical Attachment:

- Panel Mount Retention = Without
- Flanged = No

### Termination Features:

- Termination Method to PC Board = Solder

### Dimensions:

- Height (mm [in]) = 11.05 [0.435]
- PCB Tail Length (mm [in]) = 2.40 [0.094]
- PCB Thickness, Recommended (mm [in]) = 1.57 [0.062]

### Body Features:

- Inverted Jack Face = No
- Shield Plating = Nickel

### Contact Features:

- Solder Tail Contact Plating = Gold Flash over Nickel
- Contact Plating, Mating Area, Material = Gold (6)
- Contact Base Material = Phosphor Bronze

### Housing Features:

- Housing Material = PA 46

### Configuration Features:

- Preloaded = Yes
- Port Configuration = Single
- Jack Configuration = 1 x 1
- Number of Positions = 6
- Shielded = Yes
- Number of Contacts Loaded = 6
- Number of PCB Ground Tabs = 2

### Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Flammability Rating = UL 94V-0

### Packaging Features:

- Packaging Method = Tray
- Packaging Quantity = 120

- Shield Material = Brass
- PCB Ground Tab Location (mm [in]) = 6.80 [0.268]

**Product Availability:**

- Region = Asia, North America

**Other:**

- Brand = TE Connectivity

**Corporate Information**

[About TE](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[AODA Accessibility Policy](#)  
[AODA Multi-Year Accessibility Plan](#)

**Quick Links**

[Distributor Inventory](#)  
[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

**Customer Support**

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

**Keep Me Informed**