

4





3

2


1

THIS DRAWING IS UNPUBLISHED.  
 本図は未公表図面です。  
 著作権 © 1998 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV. NO.	DATE	DESCRIPTION	BY	CHK	APP'D
J					
H2		REVISED	ECR-08-031766	150E008	SF KB

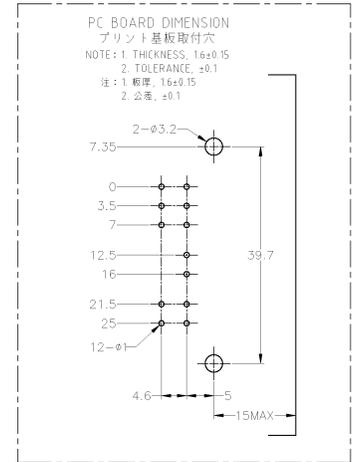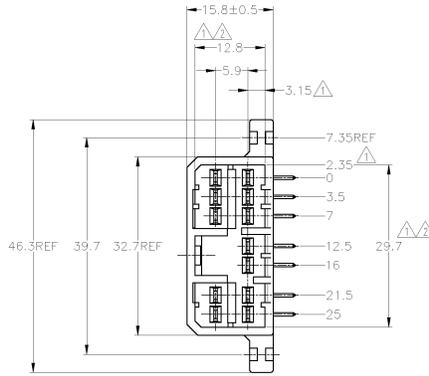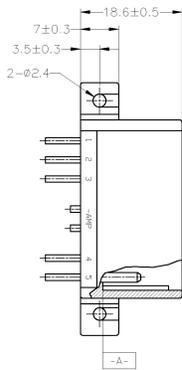

- △A-A 面より2mmの範囲で測定。
- △ 相非ハンダ付と所定の機能を満足して嵌合できること。
- △ 3. プリント基板への取付は、JIS B1115又は1122、M3×6ナベ（2線又は4線）のタッピングネジで締付けた後ハンダ付する。  
 （締付トルク4kg-cm以下）  
 △ 回路番号と下図参照のこと。
- △ PN 2-173858-6のタブの位置は、回路番号の1, 3, 5, 6, 8, 10, 12とする。
- △ TO BE MEASURED BETWEEN △A AND 2.
- △ TO BE MATE WITH PLUG HSG SMOOTHLY.
- △ 3. TO BE USE M3 TAPPING SCREW JIS B1115 OR 1122 (TYPE 2 OR 4) BEFORE SOLDER.
- △ CIRCUIT NUMBER.



△ TAB POSITION OF PN 2-173858-6; CIRCUIT NUMBER 1, 3, 5, 6, 8, 10, 12.

HB	PRE-TIN		GRAY	2-173858-6
OBsolete	SELECTIVE-TIN	PRE-TIN	GRAY	3-173858-2
OBsolete	SELECTIVE-TIN	PRE-TIN	WHITE	3-173858-1
HB	TIN-LEAD	SELECTIVE GOLD	GREEN	2-173858-4
V-2	PRE-TIN		WHITE	9-173858-1
	PRE-TIN		GRAY	173858-6
HB	TIN-LEAD	SELECTIVE GOLD	WHITE	2-173858-1
	PRE-TIN		GREEN	173858-4
	PRE-TIN		WHITE	173858-1
FLAMMABILITY OF MATERIAL 使用材料難燃グレード	SOLDERING SIDE 手付け部	CONTACT SIDE 接触部削	GOLD PLATED CIRCUIT NO. 金めっき回路番号	COLOR 色
	CONTACT FINISH コンタクト仕上			PART NUMBER 製品型番

THIS DRAWING IS A CONTROLLED DOCUMENT. 此図は管理図面です。

DRUM: T. SHINOHARA (T. 新野原) 承認者  
 CHK: K. BETSUJI (K. 津住) 検出者  
 APP'D: K. BETSUJI (K. 津住) 承認者  
 PRODUCT SPEC: 173-5216  
 MATERIAL: PBT  
 FINISH: 仕上げ  
 HOUSING: PBT  
 CONTACT: BRASS

TYCO ELECTRONICS AMP K.K. Kawasaki, Japan

070 SERIES MULTI-LOCK I/O CONNECTOR  
 12 POSITION CAP HOUSING ASSEMBLY  
 (H-TYPE)

SIZE: A2 CASE CODE: 00779 DRAWING NO: 173858  
 SCALE: 2:1 SHEET: 1 OF 1 REV: H2