

Features

Unregulated Converter

- Industry Standard Pinout
- 1kVDC or 2kVDC Isolation
- UL94V-O Package Material
- Optional Continuous Short Circuit Protected
- Fully Encapsulated
- Custom Solutions Available
- Efficiency to 85 %

Description

The RO DC/DC converters are typically used in general purpose power isolation and voltage matching applications, and feature a full industrial operating temperature range of -40°C to +85°C without derating.

Selection Guide

Part Number SIP 4	(2kV)	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max. Capacitive Load ⁽¹⁾
RO-xx3.3S	(H)	3.3, 5, 12, 15, 24	3.3	303	75	2200µF
RO-xx05S	(H)	3.3, 5, 12, 15, 24	5	200	78-80	1000µF
RO-xx09S	(H)	3.3, 5, 12, 15, 24	9	111	78-80	1000µF
RO-xx12S	(H)	3.3, 5, 12, 15, 24	12	83	80-84	470µF
RO-xx15S	(H)	3.3, 5, 12, 15, 24	15	66	80-84	470µF
RO-xx24S	(H)	3.3, 5, 12, 15, 24	24	42	78-85	220µF

xx = Input Voltage (other input and output voltage combinations available on request)

* add Suffix "P" for Continuous Short Circuit Protection, e.g. RO-0505S/P, RO-0505S/HP

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Input Voltage Range	$\pm 10\%$	
Output Voltage Accuracy	$\pm 5\%$	
Line Voltage Regulation	1.2%/1% of V_{in} typ.	
Load Voltage Regulation	3.3V output type	20% max.
(10% to 100% full load)	5V output type	15% max.
	9V, 12V, 15V, 24V output types	10% max.
Output Ripple and Noise (20MHz limited)	100mVp-p max.	
Operating Frequency	50kHz min. / 100kHz typ. / 105kHz max.	
Efficiency at Full Load	70% min. / 80% typ.	
Minimum Load = 0%	Specifications valid for 10% minimum load only.	
Isolation Voltage	(tested for 1 second)	1000VDC
	(rated for 1 minute**)	500VAC / 60Hz
Isolation Voltage	H-Suffix (tested for 1 second)	2000VDC
	H-Suffix (rated for 1 minute**)	1000VAC / 60Hz
Isolation Capacitance	20pF min. / 75pF max.	
Isolation Resistance	10 GΩ min.	
Short Circuit Protection	1 Second	
P-Suffix	Continuous	
Operating Temperature Range (free air convection)	-40°C to +85°C (see Graph)	
Storage Temperature Range	-55°C to +125°C	
Relative Humidity	95% RH	
Package Weight	1.4g	
Packing Quantity	42 pcs per Tube	
MTBF (+25°C)	Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F 985 x 10 ³ hours
(+85°C)		using MIL-HDBK 217F 200 x 10 ³ hours

continued on next page

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

ECONOLINE

DC/DC-Converter


with 3 year Warranty

RECOM

1 Watt

SIP4

Single Output




RECOM
E-358085

EN-60950-1 Certified
UL-60950-1 Certified
EN-60601-1 Certified*
(* / H suffix)

RO

Derating-Graph (Ambient Temperature)

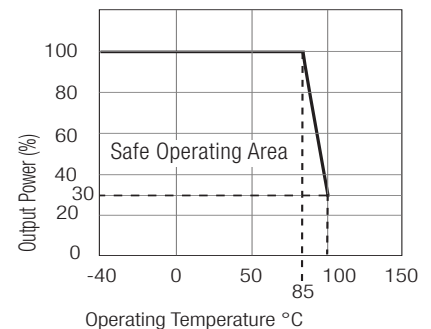

Refer to Application Notes

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage, full load and after warm-up)

Certifications

CB Test Report Report: US/15348/UL

IEC 60950-1:2005 2nd Ed.

UL General Safety Report: E358085

UL 60950-1 2nd Ed.

EN General Safety Report: SPCLVD1109103

EN60950-1:2006 + A12:2011

EN Medical Safety Report: MDD1112018 + RM1112018


IEC/EN 60601-1 3rd Edition Medical Report + ISO14971 Risk Assessment

Notes


Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Typical Characteristics


RO-xx05S

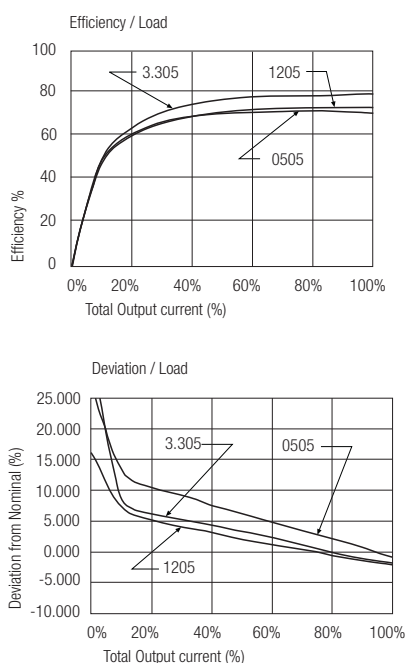

RO-xx12S


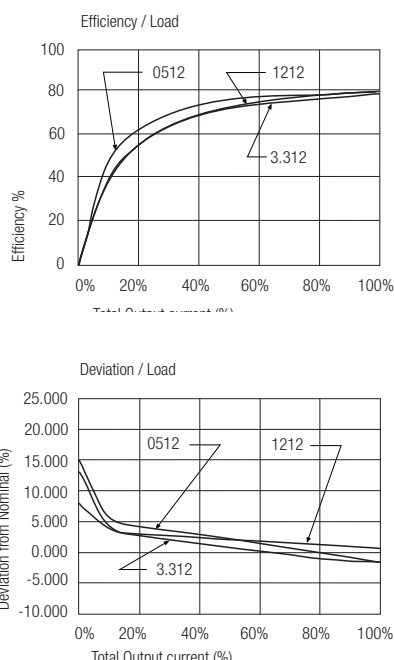


RO-xx15S


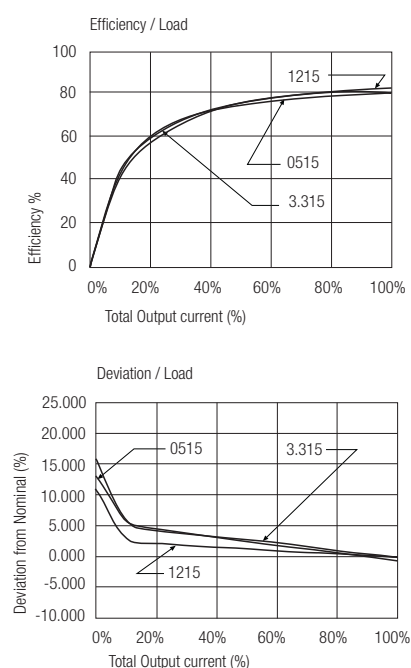


Package Style and Pinning (mm)

4 PIN SIP Package



Recommended Footprint Details



RO Pin Connections

Pin #	Single
1	-Vin
2	+Vin
3	-Vout
4	+Vout

XX.X ± 0.5 mm
XX.XX ± 0.25 mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RO-0505S/H](#) [RO-0505S/HP](#) [RO-0505S/P](#) [RO-0509S](#) [RO-0509S/H](#) [RO-0509S/HP](#) [RO-0509S/P](#) [RO-0512S/H](#) [RO-0512S/HP](#) [RO-0512S/P](#) [RO-0515S/H](#) [RO-0515S/HP](#) [RO-0515S/P](#) [RO-0524S](#) [RO-0524S/H](#) [RO-0524S/HP](#) [RO-0524S/P](#) [RO-053.3S](#) [RO-053.3S/H](#) [RO-053.3S/HP](#) [RO-053.3S/P](#) [RO-1205S/H](#) [RO-1205S/HP](#) [RO-1205S/P](#) [RO-1209S](#) [RO-1209S/H](#) [RO-1209S/HP](#) [RO-1209S/P](#) [RO-1212S/H](#) [RO-1212S/HP](#) [RO-1212S/P](#) [RO-1215S](#) [RO-1215S/H](#) [RO-1215S/HP](#) [RO-1215S/P](#) [RO-1224S](#) [RO-1224S/H](#) [RO-1224S/HP](#) [RO-1224S/P](#) [RO-123.3S](#) [RO-123.3S/H](#) [RO-123.3S/HP](#) [RO-123.3S/P](#) [RO-1505S](#) [RO-1505S/H](#) [RO-1505S/HP](#) [RO-1505S/P](#) [RO-1509S](#) [RO-1509S/H](#) [RO-1509S/HP](#) [RO-1509S/P](#) [RO-1512S](#) [RO-1512S/H](#) [RO-1512S/HP](#) [RO-1512S/P](#) [RO-1515S](#) [RO-1515S/H](#) [RO-1515S/HP](#) [RO-1515S/P](#) [RO-1524S](#) [RO-1524S/H](#) [RO-1524S/HP](#) [RO-1524S/P](#) [RO-153.3S](#) [RO-153.3S/H](#) [RO-153.3S/HP](#) [RO-153.3S/P](#) [RO-2405S/H](#) [RO-2405S/HP](#) [RO-2405S/P](#) [RO-2409S](#) [RO-2409S/H](#) [RO-2409S/HP](#) [RO-2409S/P](#) [RO-2412S/H](#) [RO-2412S/HP](#) [RO-2412S/P](#) [RO-2415S](#) [RO-2415S/H](#) [RO-2415S/HP](#) [RO-2415S/P](#) [RO-2424S/H](#) [RO-2424S/HP](#) [RO-2424S/P](#) [RO-243.3S](#) [RO-243.3S/H](#) [RO-243.3S/HP](#) [RO-243.3S/P](#) [RO-3.305S](#) [RO-3.305S/H](#) [RO-3.305S/HP](#) [RO-3.305S/P](#) [RO-3.309S](#) [RO-3.309S/H](#) [RO-3.309S/HP](#) [RO-3.309S/P](#) [RO-3.312S](#) [RO-3.312S/H](#) [RO-3.312S/HP](#) [RO-3.312S/P](#)