



Hall Effect Current Sensor S21S180D15JN

Features:

- Closed Loop type
- Current or voltage output
- Conversion ratio $K = 1:4000$
- Panel mounting with JST connector
- Aperture
- Insulated plastic case according to UL94V0

Advantages:

- Excellent accuracy and linearity
- Low temperature drift
- Wide frequency bandwidth
- No insertion loss
- High Immunity to external interferences
- Optimised response time
- Current overload capability



Specifications

$T_A = 25^\circ\text{C}$, $V_{CC} = \pm 15\text{V}$


Parameters	Symbol	S21S180D15JN
Rated Current	I_f	180A
Maximum Current ¹	I_{fmax}	$\pm 540\text{A}$ @ $T_A = 25^\circ\text{C}$ $5\Omega \leq R_m \leq 30\Omega$ $\pm 540\text{A}$ @ $T_A = 80^\circ\text{C}$ $5\Omega \leq R_m \leq 20\Omega$
Measuring resistance $I_f = \pm A_{DC}$ @ 80°C	R_M	$0 - 68\Omega$ @ $V_{CC} \pm 12\text{V}$ $0 - 100\Omega$ @ $V_{CC} \pm 15\text{V}$
Conversion Ratio	K	1 : 4000
Output Current	I_{OUT}	$\pm 45\text{mA}$
Offset Current	I_{OE}	$\leq \pm 0.2\text{mA}$ @ $I_f = 0\text{A}$
Output Current Accuracy	X	$I_{OUT} \pm 1\%$ (without I_{OE})
Output Linearity	ϵ_L	$\leq \pm 0.3\%$ @ I_f
Supply Voltage ²	V_{CC}	$\pm 12\text{V} \pm 5\%$
Consumption Current	I_{CC}	$\leq \pm 16\text{mA}$ (Output Current is not included)
Response Time ³	t_r	$\leq 1\mu\text{s}$ @ $di/dt = 100\text{A} / \mu\text{s}$
Output Temperature Characteristic	TCI_{OUT}	$\leq \pm 0.02\% / ^\circ\text{C}$ @ I_f
Offset Temperature Characteristic	TCI_{OE}	$\leq \pm 0.01\text{mA} / ^\circ\text{C}$ @ $I_f = 0\text{A}$
Hysteresis allowance	I_{OH}	$\leq 0.2\text{mA}$ ($0\text{A} \leftrightarrow I_f$)
Insulation Withstanding	V_d	AC 2500V, for 1minute (sensing current 0.5mA), inside of aperture $\leftrightarrow$ terminal
Insulation Resistance	R_{IS}	500M Ω (@ DC 500V) inside of aperture $\leftrightarrow$ terminal
Frequency Bandwidth	f	DC .. 200 kHz
Secondary Coil Resistance	R_s	48Ω @ 25°C 60Ω @ 80°C
Operating Temperature	T_A	$-30^\circ\text{C} \sim +80^\circ\text{C}$
Storage Temperature	T_s	$-40^\circ\text{C} \sim +85^\circ\text{C}$

¹ @ $V_{CC} = \pm 15\text{V}$ for 10 Seconds — ² Rated Current is restricted by V_{CC} — ³ Time between 10% input current full scale and 90% of sensor output full scale


Electrical Performances

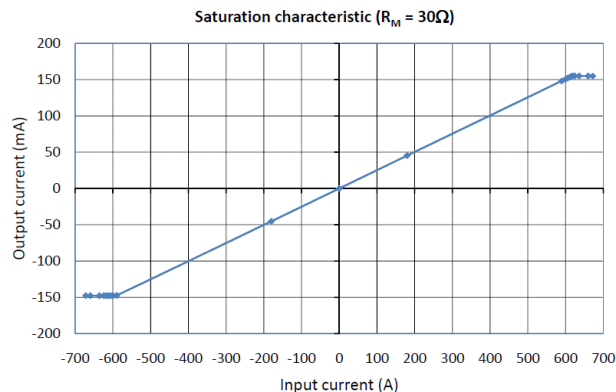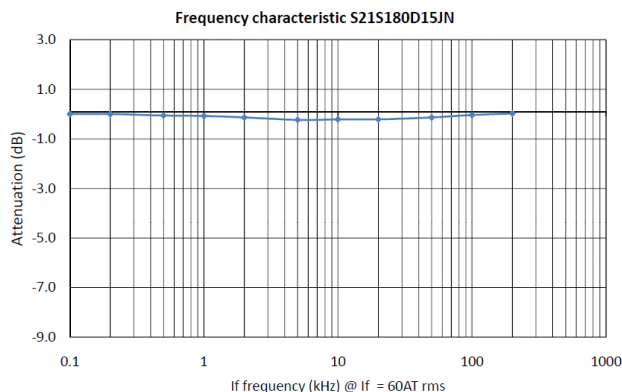

Mechanical dimensions in mm

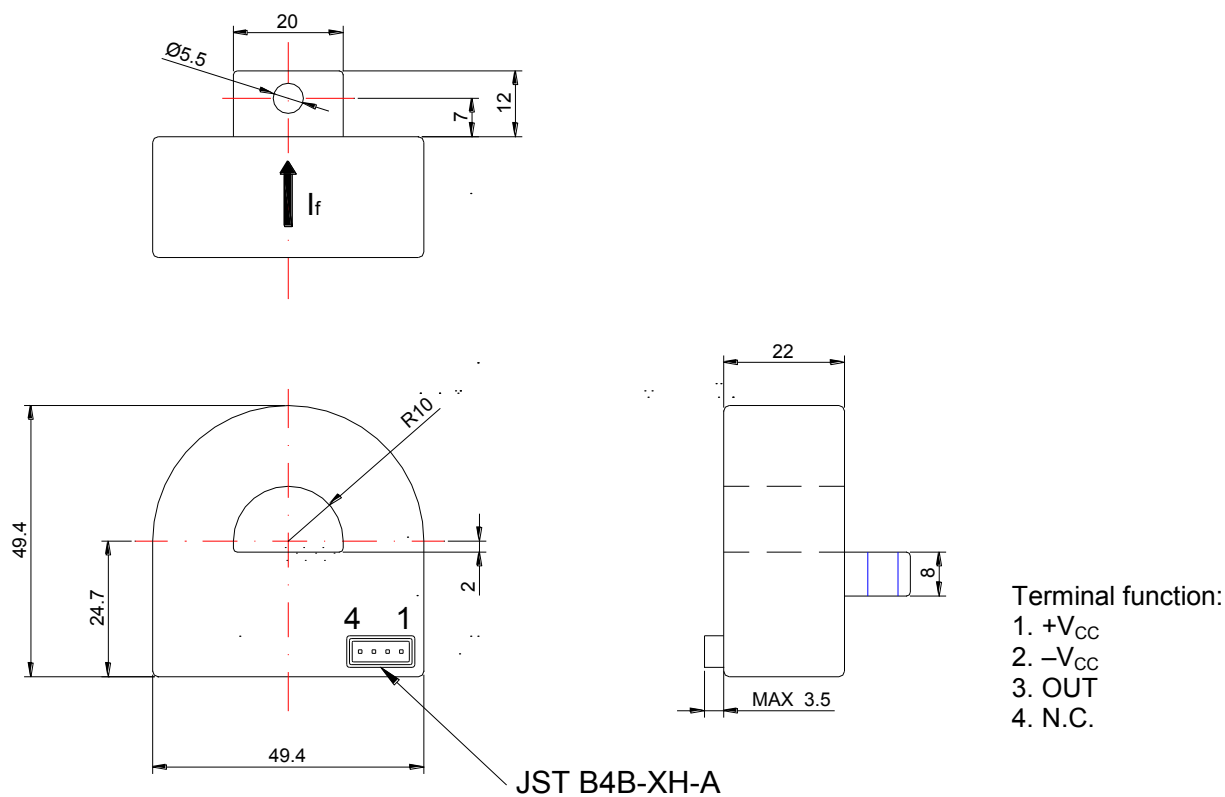

Electrical connection diagram

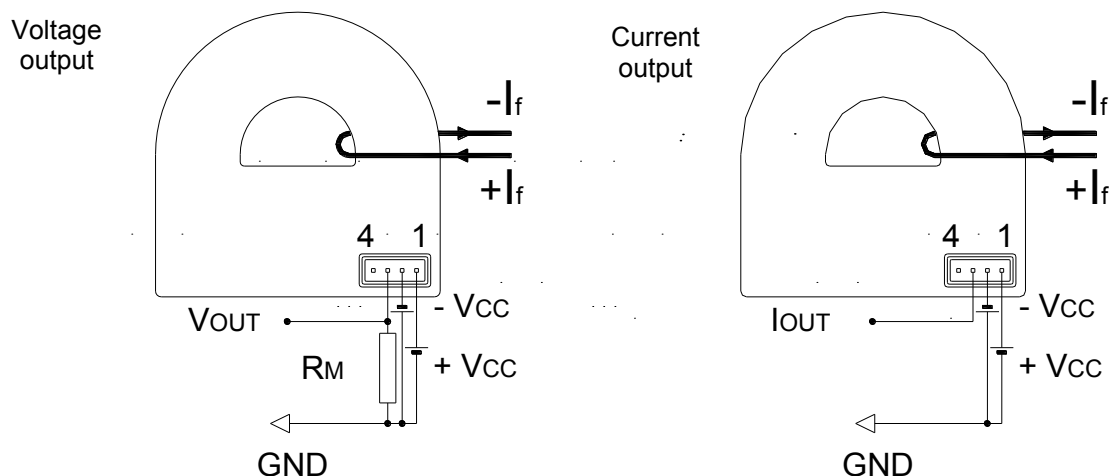

Package & Weight Information

Weight	Pcs/box	Pcs/carton	Pcs/pallet
71g	25	100	1600

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com