


Feedthrough EMI Filter Datasheet

(M5 Thread : 6.0mm Round Head)

Circuit Configurations Available

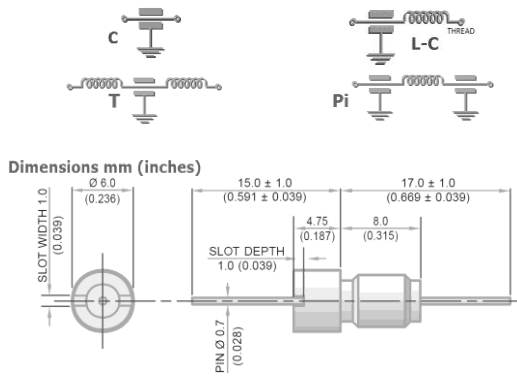

M5 × 0.8 – 6g Thread

Electrical Details

Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	See relevant tables

Mechanical Details

Head Diameter	6.0mm (0.236")
Nut A/F	N/a. For use in tapped hole
Washer Diameter	N/a
Mounting Torque	0.3Nm (2.65lbf in) max.
Mounting Hole	M5 × 0.8 – 6h
Max. Panel Thickness	N/a
Weight (Typical)	2.0g (0.07oz)
Finish	Silver plate on copper undercoat

C Configuration

Product Code	Capacitance ± 20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	Typical Insertion Loss (db)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
* SFLMC5000100ZC0	10pF -20% / +80%	C0G	500#	750						4
SFLMC5000150ZC0	15pF -20% / +80%	C0G	500#	750						7
SFLMC5000220ZC0	22pF -20% / +80%	C0G	500#	750						10
SFLMC5000330ZC0	33pF -20% / +80%	C0G	500#	750						12
* SFLMC5000470ZC0	47pF -20% / +80%	C0G	500#	750					1	15
* SFLMC5000680MC0	68pF	C0G	500#	750					2	18
* SFLMC5000101MC0	100pF	C0G	500#	750					4	22
SFLMC5000151MC0	150pF	C0G	500#	750					7	25
* SFLMC5000221MC0	220pF	C0G	500#	750					10	29
* SFLMC5000331MC0	330pF	C0G	500#	750					13	33
* SFLMC5000471MX0	470pF	† X7R	500#	750				1	16	35
SFLMC5000681MX0	680pF	† X7R	500#	750				2	19	36
* SFLMC5000102MX0	1.0nF	X7R	500#	750				4	23	41
SFLMC5000152MX0	1.5nF	X7R	500#	750				7	26	45
* SFLMC5000222MX0	2.2nF	X7R	500#	750				10	30	50
SFLMC5000332MX0	3.3nF	X7R	500#	750				13	33	52
* SFLMC5000472MX0	4.7nF	X7R	500#	750			1	16	36	55
SFLMC5000682MX0	6.8nF	X7R	500#	750			2	19	39	57
* SFLMC5000103MX0	10nF	X7R	500#	750			4	22	41	60
* SFLMC5000153MX0	15nF	X7R	500#	750			7	25	44	62
* SFLMC5000223MX0	22nF	X7R	500#	750			10	29	46	65
SFLMC5000333MX0	33nF	X7R	500#	750			13	33	48	68
* SFLMC2000473MX0	47nF	X7R	200	500		1	16	35	50	70
SFLMC2000683MX0	68nF	X7R	200	500		2	19	39	54	>70
*SFLMC1000104MX0	100nF	X7R	100	250		4	22	41	57	>70
*SFLMC0500154MX0	150nF	X7R	50	125		7	25	45	60	>70

- Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended

* Recommended values

† Also available in C0G



L-C Configuration

Ferrite Inductance (Typical) – 500nH					Typical Insertion Loss (db)					
Product Code	Capacitance ± 20%	Dielectric	Rated Voltage (dc)	DWV (dc)	0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFLML5000100ZC0	10pF -20% / +80%	C0G	500#	750						6
SFLML5000150ZC0	15pF -20% / +80%	C0G	500#	750						9
SFLML5000220ZC0	22pF -20% / +80%	C0G	500#	750						12
SFLML5000330ZC0	33pF -20% / +80%	C0G	500#	750					1	15
*SFLML5000470ZC0	47pF -20% / +80%	C0G	500#	750					2	19
*SFLML5000680MC0	68pF	C0G	500#	750					4	20
*SFLML5000101MC0	100pF	C0G	500#	750					7	24
SFLML5000151MC0	150pF	C0G	500#	750					10	27
*SFLML5000221MC0	220pF	C0G	500#	750					12	30
*SFLML5000331MC0	330pF	C0G	500#	750				1	16	34
*SFLML5000471MX0	470pF	† X7R	500#	750				2	19	38
SFLML5000681MX0	680pF	† X7R	500#	750				3	22	41
*SFLML5000102MX0	1.0nF	X7R	500#	750				6	25	44
SFLML5000152MX0	1.5nF	X7R	500#	750				9	29	48
*SFLML5000222MX0	2.2nF	X7R	500#	750				12	31	51
SFLML5000332MX0	3.3nF	X7R	500#	750				15	35	54
*SFLML5000472MX0	4.7nF	X7R	500#	750			1	18	39	57
SFLML5000682MX0	6.8nF	X7R	500#	750			2	21	41	60
*SFLML5000103MX0	10nF	X7R	500#	750			4	23	43	63
*SFLML5000153MX0	15nF	X7R	500#	750			7	27	46	66
*SFLML5000223MX0	22nF	X7R	500#	750			10	30	48	68
SFLML5000333MX0	33nF	X7R	500#	750			13	34	50	70
*SFLML2000473MX0	47nF	X7R	200	500		1	17	37	51	>70
SFLML2000683MX0	68nF	X7R	200	500		2	20	40	55	>70
*SFLML1000104MX0	100nF	X7R	100	250		4	22	44	60	>70
*SFLML0500154MX0	150nF	X7R	50	125		7	25	47	62	>70

- Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended

* Recommended values

† Also available in C0G

Pi Configuration

Ferrite Inductance (Typical) – 250nH					Typical Insertion Loss (db)					
Product Code	Capacitance ± 20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFLMP5000200ZC0	20pF -20% / +80%	C0G	500#	750					1	11
SFLMP5000300ZC0	30pF -20% / +80%	C0G	500#	750					2	15
SFLMP5000440ZC0	44pF -20% / +80%	C0G	500#	750					3	19
SFLMP5000660ZC0	66pF -20% / +80%	C0G	500#	750					4	23
*SFLMP5000940ZC0	94pF -20% / +80%	C0G	500#	750					6	29
*SFLMP5000136MC0	136pF	C0G	500#	750					8	35
*SFLMP5000201MC0	200pF	C0G	500#	750					11	41
SFLMP5000301MC0	300pF	C0G	500#	750				1	15	50
*SFLMP5000441MC0	440pF	C0G	500#	750				2	20	57
*SFLMP5000661MC0	660pF	C0G	500#	750				3	25	65
*SFLMP5000941MX0	940pF	†X7R	500#	750				5	31	68
SFLMP5001N36MX0	1.36nF	†X7R	500#	750				7	37	>70
*SFLMP5000202MX0	2nF	X7R	500#	750				10	44	>70
SFLMP5000302MX0	3nF	X7R	500#	750				13	51	>70
*SFLMP5000442MX0	4.4nF	X7R	500#	750			1	17	59	>70
SFLMP5000662MX0	6.6nF	X7R	500#	750			2	21	64	>70
*SFLMP5000942MX0	9.4nF	X7R	500#	750			4	27	68	>70
SFLMP50013N6MX0	13.6nF	X7R	500#	750			6	34	>70	>70
*SFLMP5000203MX0	20nF	X7R	500#	750			9	40	>70	>70
*SFLMP5000303MX0	30nF	X7R	500#	750			12	48	>70	>70
*SFLMP5000443MX0	44nF	X7R	500#	750		1	14	54	>70	>70
SFLMP5000663MX0	66nF	X7R	500#	750		2	17	63	>70	>70
*SFLMP2000943MX0	94nF	X7R	200	500		4	18	68	>70	>70
SFLMP200136NMX0	136nF	X7R	200	500		8	25	>70	>70	>70
*SFLMP1000204MX0	200nF	X7R	100	250		10	27	>70	>70	>70
*SFLMP0500304MX0	300nF	X7R	50	125		13	30	>70	>70	>70

- Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended

* Recommended values

† Also available in C0G

T Configuration

Ferrite Inductance (Typical) – 450nH					Typical Insertion Loss (db)					
Product Code	Capacitance ± 20%	Dielectric	Rated Voltage (dc)	DWV (dc)	0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFLMT5000100ZC0	10pF -20% / +80%	C0G	500#	750						9
SFLMT5000150ZC0	15pF -20% / +80%	C0G	500#	750						11
SFLMT5000220ZC0	22pF -20% / +80%	C0G	500#	750					1	14
SFLMT5000330ZC0	33pF -20% / +80%	C0G	500#	750					2	18
*SFLMT5000470ZC0	47pF -20% / +80%	C0G	500#	750					4	20
*SFLMT5000680MC0	68pF	C0G	500#	750					6	23
*SFLMT5000101MC0	100pF	C0G	500#	750					9	27
SFLMT5000151MC0	150pF	C0G	500#	750					12	30
*SFLMT5000221MC0	220pF	C0G	500#	750					15	33
*SFLMT5000331MC0	330pF	C0G	500#	750				1	19	36
*SFLMT5000471MX0	470pF	† X7R	500#	750				2	21	40
SFLMT5000681MX0	680pF	† X7R	500#	750				4	24	43
*SFLMT5000102MX0	1.0nF	X7R	500#	750				7	28	47
SFLMT5000152MX0	1.5nF	X7R	500#	750				10	30	50
*SFLMT5000222MX0	2.2nF	X7R	500#	750				13	34	53
SFLMT5000332MX0	3.3nF	X7R	500#	750				17	38	57
*SFLMT5000472MX0	4.7nF	X7R	500#	750				19	40	59
SFLMT5000682MX0	6.8nF	X7R	500#	750			1	23	43	63
*SFLMT5000103MX0	10nF	X7R	500#	750			4	26	45	66
*SFLMT5000153MX0	15nF	X7R	500#	750			7	29	47	68
*SFLMT5000223MX0	22nF	X7R	500#	750			10	33	49	70
SFLMT5000333MX0	33nF	X7R	500#	750			14	36	50	>70
*SFLMT2000473MX0	47nF	X7R	200	500		1	17	39	52	>70
SFLMT2000683MX0	68nF	X7R	200	500		2	20	42	57	>70
*SFLMT1000104MX0	100nF	X7R	100	250		4	22	46	62	>70
*SFLMT0500154MX0	150nF	X7R	50	125		7	25	49	68	>70

- Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended

* Recommended values

† Also available in C0G

Ordering Information

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Nuts & washers
SF	L	M	T	500	0102	M	X	0
Syfer Filter	6.0mm O.D.	M5	C = C Filter L = L-C Filter P = Pi Filter T = T Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF	M = ± 20% Z = -20+80%	C = C0G/NP0 X = X7R	0 = Without

Note¹: Installation tool available on request

Note²: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.


Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.

Please refer specific requests to the factory.

Surface Mount and Panel Mount Solder-in filters

Solder pad layouts are included with the detailed information for each part.

Recommended soldering profile

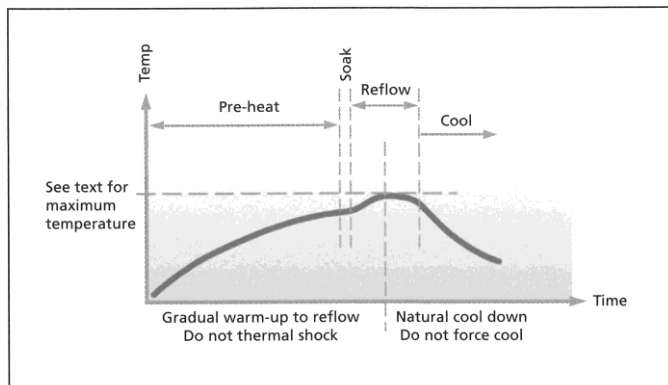

Soldering of filters

The soldering process should be controlled such that the filter does not experience any thermal shocks which may induce thermal cracks in the ceramic dielectric.

The pre-heat temperature rise of the filter should be kept to around 2°C per second. In practice successful temperature rises tend to be in the region of 1.5°C to 4°C per second dependent upon substrate and components.

The introduction of a soak after pre-heat can be useful as it allows temperature uniformity to be established across the substrate thus preventing substrate warping. The magnitude or direction of any warping may change on cooling imposing damaging stresses upon the filter.

E01, E03, E07 SBSP ranges are compatible with all standard solder types including lead-free, maximum temperature 260°C. For SBSG, SBSM and SFSS ranges, solder time should be minimised, and the temperature controlled to a maximum of 220°C. For SFSR, SFST and SFSU ranges the maximum temperature is 250°C.

Cooling to ambient temperature should be allowed to occur naturally. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Draughts should be avoided. Forced air cooling can induce thermal breakage, and cleaning with cold fluids immediately after a soldering process may result in cracked filters.

Note: The use of FlexiCap™ terminations is strongly recommended to reduce the risk of mechanical cracking.

Soldering to axial wire leads

Soldering temperature

The tip temperature of the iron should not exceed 300°C.

Dwell time

Dwell time should be 3-5 seconds maximum to minimise the risk of cracking the capacitor due to thermal shock.

Heat sink

Where possible, a heat sink should be used between the solder joint and the body, especially if longer dwell times are required.

Bending or cropping of wire leads

Bending or cropping of the filter terminations should not be carried out within 4mm (0.157") of the epoxy encapsulation, the wire should be supported when cropping.

Soldering irons should not be used for mounting surface mount filters as they can result in thermal shock damage to the chip capacitor.

A more comprehensive application note covering installation of all Syfer products is available on the Syfer website.

Resin filled screw mounted EMI filters

General

The ceramic capacitor, which is the heart of the filter, can be damaged by thermal and mechanical shock, as well as by over-voltage. Care should be taken to minimise the risk of stress when mounting the filter to a panel and when soldering wire to the filter terminations.

Mounting to chassis

Mounting torque

It is important to mount the filter to the bulkhead or panel using the recommended mounting torque, otherwise damage may be caused to the capacitor due to distortion of the case. When a threaded hole is to be utilised, the maximum mounting torque should be 50% of the specified figure which relates to unthreaded holes. For details of torque figures for each filter range, please see below.

Thread	Torque (max.)	
	With nut	Into tapped hole
M2.5 & 4-40 UNC	-	0.15Nm (1.32lbf in)
M3	0.25Nm (2.21lbf in)	0.15Nm (1.32lbf in)
6-32 UNC	0.3Nm (2.65lbf in)	0.15Nm (1.32lbf in)
M3.5	0.35Nm (3.09lbf in)	0.18Nm (1.59lbf in)
M4 & 8-32 UNC	0.5Nm (4.42lbf in)	0.25Nm (2.21lbf in)
M5, 12-32 UNEF & 2BA	0.6Nm (5.31lbf in)	0.3Nm (2.65lbf in)
M6 & 1/4-28 UNF	0.9Nm (7.97lbf in)	-

Tools

Hexagonal devices should be assembled using a suitable socket. Round bodied filters may be fitted to the panel in one of two ways (and should not be fitted using pliers or other similar tools which may damage them):

- Round bodies with slotted tops are designed to be screwed in using a simple purpose-designed tool.
- Round bodies without slotted tops are intended to be inserted into slotted holes and retained with a nut.

Grounding

To ensure the proper operation of the filters, the filter body should be adequately grounded to the panel to allow an effective path for the interference. The use of locking adhesives is not recommended, but if used should be applied after the filter has been fitted.

Minimum plate thickness

Users should be aware that the majority of these filters have an undercut between the thread and the mounting flange of the body, equal to 1.5 x the pitch of the thread. Mounting into a panel thinner than this undercut length may result in problems with thread mating and filter position. It is recommended that a panel thicker than this undercut length be used wherever possible.

Maximum plate thickness

This is specified for each filter in order that the nut can be fully engaged even when using a washer.

Soldering to axial wire leads

Soldering temperature

The tip temperature of the iron should not exceed 300°C.

Dwell time

Dwell time should be 3-5 seconds maximum to minimise the risk of cracking the capacitor due to thermal shock.

Heat sink

Where possible, a heat sink should be used between the solder joint and the body, especially if longer dwell times are required.

Bending or cropping of wire leads

Bending or cropping of the filter terminations should not be carried out within 4mm (0.157") of the epoxy encapsulation, the wire should be supported when cropping.

RoHS compliance

All surface mount filters, resin sealed panel mount filters and power filters are fully RoHS compliant through material exemption, although care must be taken not to exceed the maximum soldering temperatures of surface mount parts.

Standard hermetic sealed panel mount filters use SnPb solders as part of their assembly, and are intended for exempt applications such as aerospace or military. Substitution of the SnPb solder with Pb free solders is possible to create a RoHS compliant part – please contact factory for further details.