


CMM 220 male

STRAIGHT PCB

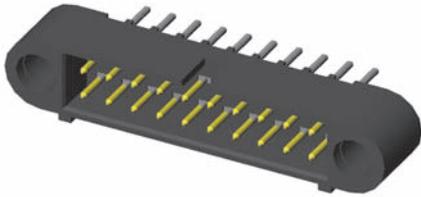

nn min = 04 nn max = 60

Part numbering :

Type :Y-YL

2 2 | n n

See Fixing on page 43, 44
"Fxx" without fixing

nn = number of LF contacts

Type	L
Y	3
YL	4,5


Calculation :

$$A = nn - 2$$


$$B = A + 7$$

$$C = A + 12$$

Refer to dimension table on cover page

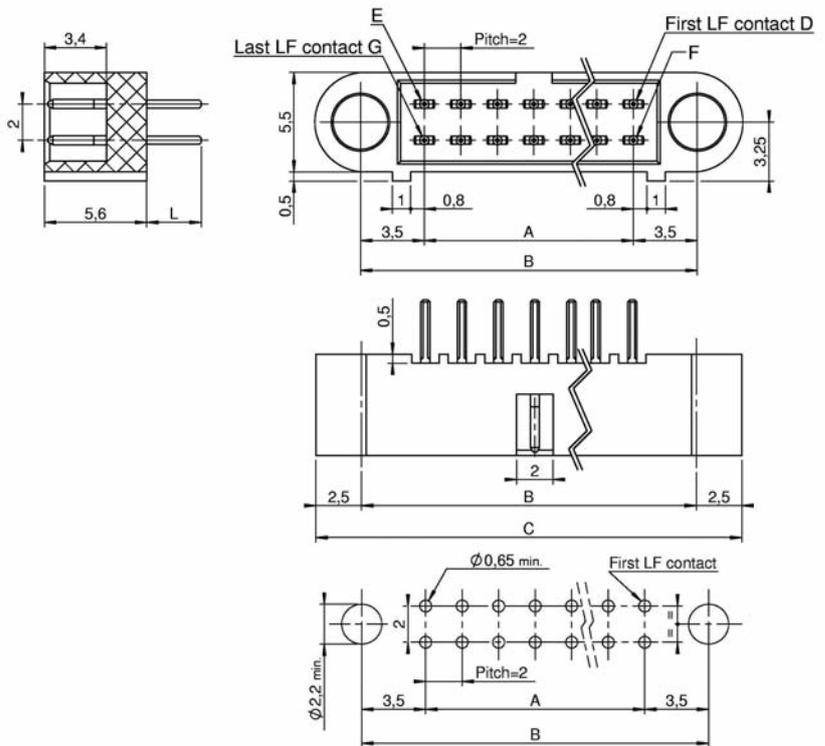

90° PCB

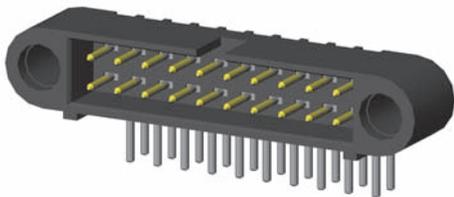

nn min = 04 nn max = 60

Part numbering :

Type :V-VL

2 2 | n n

See Fixing on page 43, 44
"Fxx" without fixing

nn = number of LF contacts

Type	L
V	3
VL	4,5

Calculation :

$$A = nn - 2$$

$$B = A + 7$$

$$C = A + 12$$

Refer to dimension table on cover page

