


Low-frequency transistor

UML1N


●Features

- 1) The 2SA1037AK and a diode are housed independently in a UMT package.

●Equivalent circuit



●External dimensions (Unit : mm)

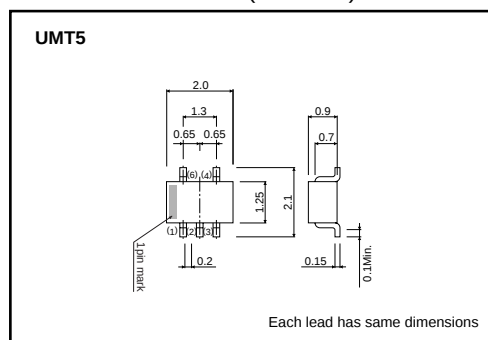

●Packaging specifications

Type	FML10
Package	SMT5
Marking	L10
Code	TR
Basic ordering unit(pieces)	3000

●Absolute maximum ratings (Ta=25°C)

Tr

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CBO}	-60	V
Collector-emitter voltage	V_{CEO}	-50	V
Emitter-base voltage	V_{EBO}	-6	V
Collector current	I_C	-0.15	A
Collector power dissipation	P_C	0.15	W
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-55 to +150	°C

Di

Parameter	Symbol	Limits	Unit
DC reverse voltage	V_R	80	V
Peak reverse voltage	V_{RM}	80	V
Mean rectifying current	I_O	0.1	A
Peak forward voltage	I_{FM}	0.3	A
Surge current	I_{surge}	4	A
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-55 to +150	°C
Specified I/O frequencies	f	100	MHz

Transistors

●Electrical characteristics (Ta=25°C)

Tr

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-emitter breakdown voltage	BV_{CEO}	-50	—	—	V	$I_C = -1\text{mA}$
Collector-base breakdown voltage	BV_{CBO}	-60	—	—	V	$I_C = -50\mu\text{A}$
Emitter-base breakdown voltage	BV_{EBO}	-6	—	—	V	$I_E = -50\mu\text{A}$
Collector cutoff current	I_{CBO}	—	—	-0.1	μA	$V_{CB} = -60\text{V}$
Emitter cutoff current	I_{EBO}	—	—	-0.1	μA	$V_{EB} = -5\text{V}$
Collector-emitter saturation voltage	$V_{CE(sat)}$	—	—	-0.5	V	$I_C/I_E = -50\text{mA}/-5\text{mA}$
DC current transfer ratio	h_{FE}	120	—	560	—	$V_{CE} = -6\text{V}$, $I_C = -1\text{mA}$
Transition frequency	f_T	—	140	—	MHz	$V_{CE} = -12\text{V}$, $I_E = 2\text{mA}$, $f = 100\text{MHz}$
Output capacitance	C_{ob}	—	4	5	pF	$V_{CB} = -12\text{V}$, $I_E = 0\text{A}$, $f = 1\text{MHz}$

Di

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_F	—	—	1.2	V	$I_F = 100\text{mA}$
Reverse current	I_R	—	—	0.1	μA	$V_R = 70\text{V}$
Capacitance between terminals	C_T	—	—	3.5	pF	$V_R = 6\text{V}$, $f = 1\text{MHz}$
Reverse recovery time	t_{rr}	—	—	4	ns	$V_R = 6\text{V}$, $I_F = 5\text{mA}$, $R_L = 50\Omega$

●Electrical characteristic curves

Tr

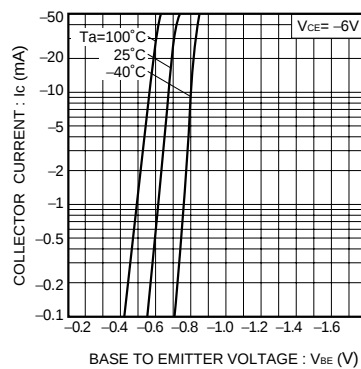


Fig.1 Grounded emitter propagation characteristics

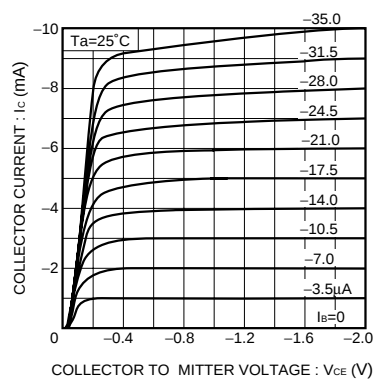


Fig.2 Grounded emitter output characteristics (I)

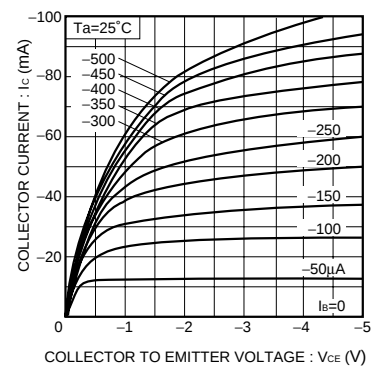


Fig.3 Grounded emitter output characteristics (II)

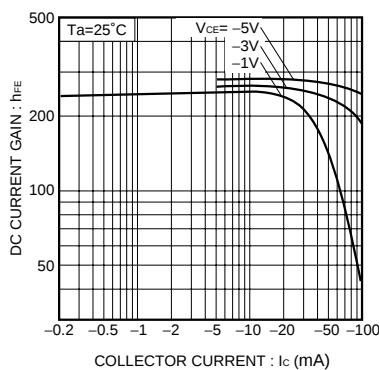


Fig.4 DC current gain vs. collector current (I)

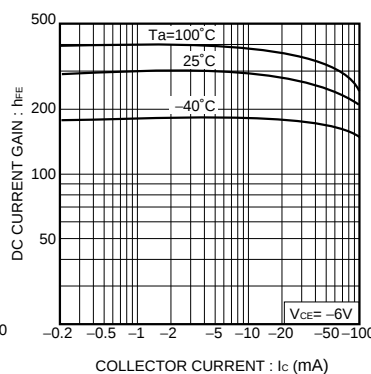


Fig.5 DC current gain vs. collector current (II)

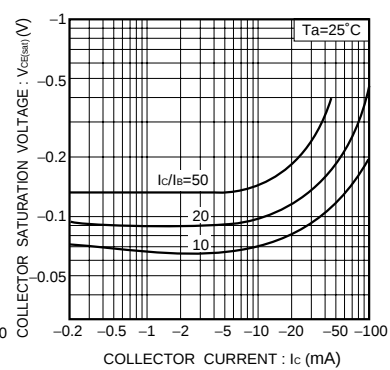


Fig.6 Collector-emitter saturation voltage vs. collector current (I)

Transistors

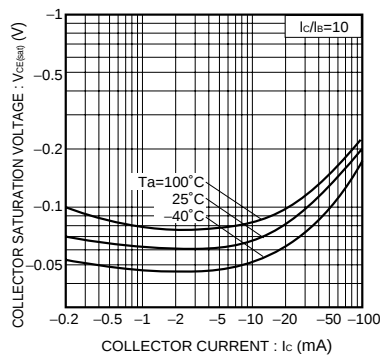


Fig.7 Collector-emitter saturation voltage vs. collector current (II)

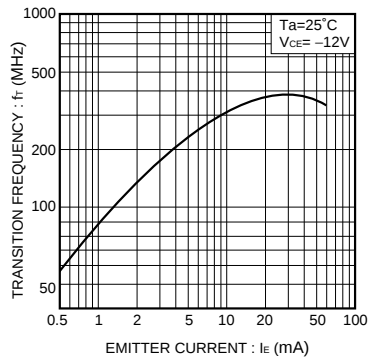
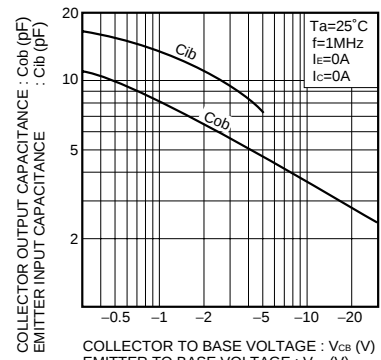


Fig.8 Gain bandwidth product vs. emitter current

Fig.9 Collector output capacitance vs. collector-base voltage
Emitter input capacitance vs. emitter-base voltage

Di

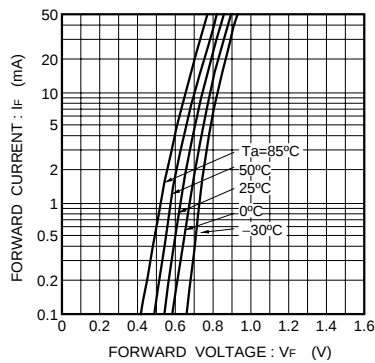


Fig.10 Forward characteristics

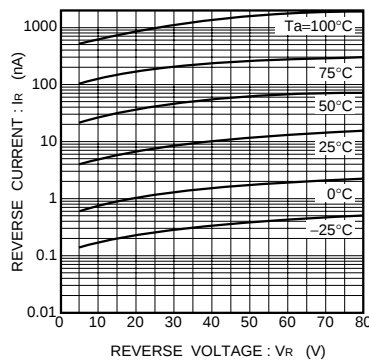


Fig.11 Reverse characteristics

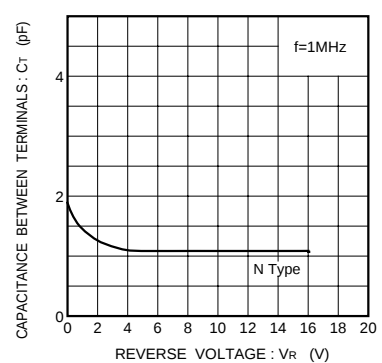


Fig.12 Capacitance between terminals characteristics

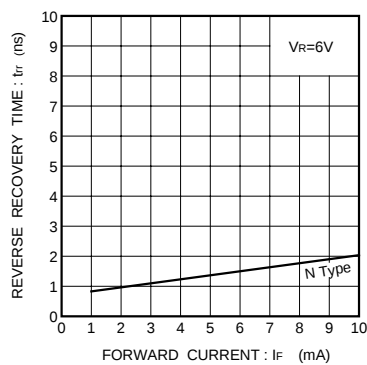
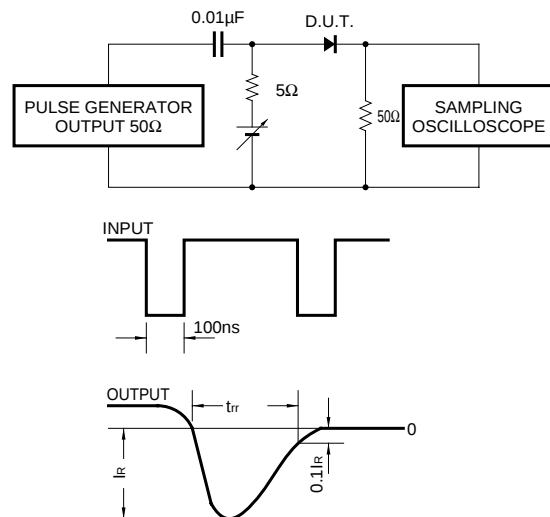


Fig.13 Reverse recovery time

Fig.14 Reverse recovery time (t_{rr}) measurement circuit

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[UML1NTR](#)