
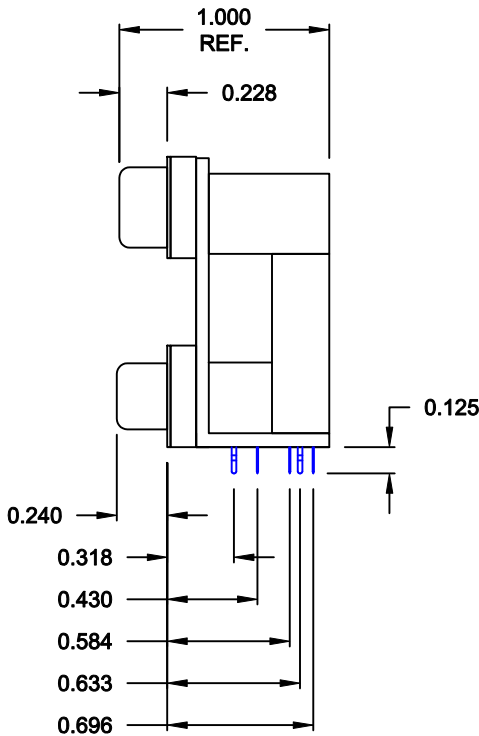
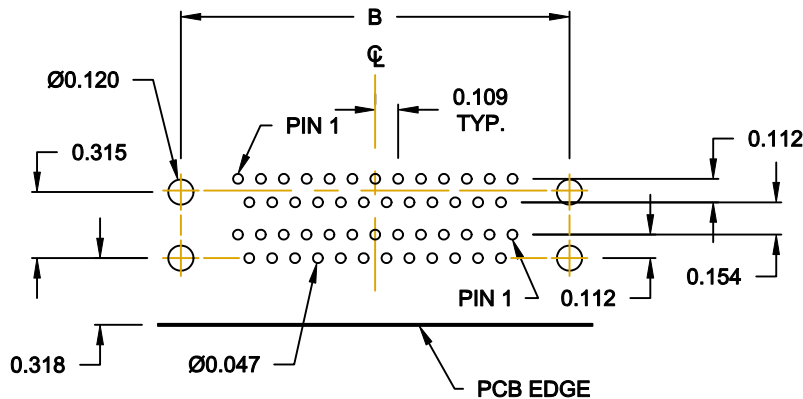


DESCRIPTION: 0.900 CENTER DUAL PORT D-SUB - MALE OVER FEMALE

25 PIN  
SHOWN

|   | DIMENSIONS (IN.) |       |       |       |
|---|------------------|-------|-------|-------|
|   | 9                | 15    | 25    | 37    |
| A | 1.204            | 1.535 | 2.078 | 2.724 |
| B | 0.984            | 1.312 | 1.850 | 2.500 |
| C | 0.494            | 0.494 | 0.494 | 0.494 |

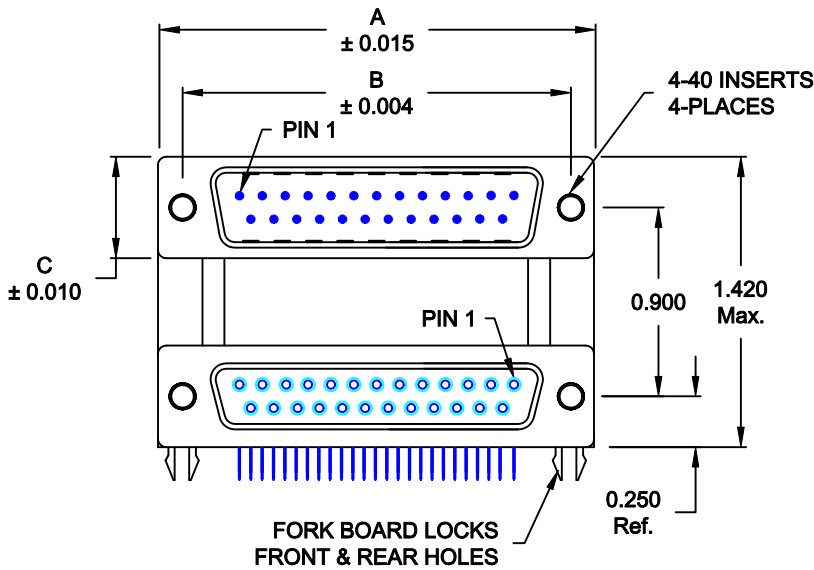

SPECIFICATION:

MATERIAL:

SHELL: STEEL, NICKEL PLATED  
INSULATOR: UL 94V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.  
CONTACTS: BRASS  
CONTACT PLATING: GOLD PLATED ENTIRE CONTACT

ELECTRICAL:

INSULATOR RESISTANCE: 1,000 Ohms Min.  
DIELECTRIC STRENGTH: 1,000VAC RMS  
CURRENT RATING: 5 AMPS  
OPERATING TEMPERATURE: -55° C TO 105° C

179-YYY-413R491

SERIES

POSITIONS

009  
015  
025  
037

GENDER

31 = FEMALE OVER MALE  
41 = MALE OVER FEMALE  
51 = FEMALE OVER FEMALE  
61 = MALE OVER MALE

SHELL PLATING

3 = NICKEL

RoHS COMPLIANT (HIGH TEMP. PROCESS)

HARDWARE OPTIONS

49 = 4-40 INSERTS/BOARD LOCKS

PLATING OPTIONS

1 = GOLD FLASH (ENTIRE CONTACT)  
A = 30u" GOLD MATING AREA/GOLD FLASH TAILS  
9 = 30u" GOLD MATING AREA/TIN TAILS

DO NOT SCALE FROM DRAWING

|                                                                                      |                                                                                                                                                                                             |                                   |                   |                          |                |                 |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------|--------------------------|----------------|-----------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN:<br><b>C. SMITH</b>         |                   | DATE:<br><b>03-30-07</b> |                |                 |
|                                                                                      |                                                                                                                                                                                             | CHECKED:                          |                   | DATE:                    |                |                 |
| <b>NorComp</b>                                                                       |                                                                                                                                                                                             | SCALE:<br><b>1 : 1</b>            | SHEET<br><b>1</b> |                          | OF<br><b>1</b> | REV<br><b>5</b> |
|                                                                                      |                                                                                                                                                                                             | DWG NO.<br><b>179-YYY-413R491</b> |                   |                          |                |                 |

RoHS COMPLIANT

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NorComp:

[179-009-413R491](#) [179-015-413R491](#) [179-025-413R491](#) [179-037-413R491](#)