


# EAO – Your Expert Partner for Human Machine Interfaces

## 18-031.0052L - Indicator actuator

### 18-031.0052L - Indicator actuator



*Attention: The preview is based on a sample product. This can differ from your current configuration.*

#### Mounting

|                  |        |
|------------------|--------|
| Mounting cut-out | Ø 8 mm |
| Design           | raised |

#### Front

|                 |        |
|-----------------|--------|
| Front dimension | Ø 9 mm |
| Front shape     | round  |

#### Other Attributes

|                   |                    |
|-------------------|--------------------|
| Weight            | 0.002 kg           |
| Operation current | 10 mA              |
| Operating voltage | 12 V DC $\pm 10\%$ |

#### Operating-/Indication part

|                   |              |
|-------------------|--------------|
| Lens material     | Plastic      |
| Lens colour       | red          |
| Lens profile      | flat         |
| Lens optics       | translucent  |
| Lens illumination | illuminative |

#### IP-Rating

|                  |       |
|------------------|-------|
| Front protection | IP 40 |
|------------------|-------|

#### Connection Method

|          |        |
|----------|--------|
| Terminal | Solder |
|----------|--------|


#### Function

|           |
|-----------|
| Indicator |
|-----------|


# EAO – Your Expert Partner for Human Machine Interfaces

18-031.0052L - Indicator actuator

## Dimensions




## Mounting cut-outs



## Wiring diagram



## Component layout

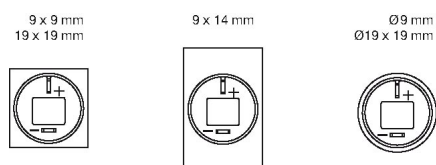

## Additional information

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination