

Cylinder accessories → Cylinder mountings; series CM1

AA4 axle



00105158

Fig. 1






Fig. 2

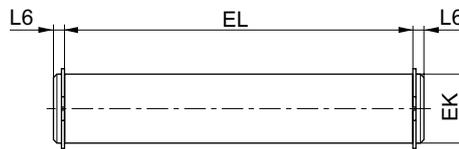

21294

Scope of delivery: pivot pins incl. circlips  
1) circlip DIN 471

Part No.	Piston Ø	Ø d 1)	EK e8	EL	L	L6 1)	Material	Surface	Standardization
<b>1823120020</b>	32	20	10	45,2 +0,3	3.5	9	Steel	galvanized	-
<b>1823120021</b>	40	22	12	52,2 +0,3	4	9	Steel	galvanized	-
<b>1823120022</b>	50	22	12	60,2 +0,3	4	9	Steel	galvanized	-
<b>1823120023</b>	63	28	16	70,2 +0,3	4.5	11	Steel	galvanized	-
<b>1823120024</b>	80	28	16	90,2 +0,3	4.5	11	Steel	galvanized	-
<b>1823120025</b>	100	38	20	110,2 +0,3	5	11	Steel	galvanized	-
<b>5236000092</b>	125	34.2	25	132 +0,5	-	3,5	Steel	galvanized	ISO 15552
<b>5237000092</b>	160 / 200	40.5	30	172 +0,5	-	4	Steel	galvanized	ISO 15552
<b>5239000092</b>	250	52.6	40	202 +0,5	-	6,5	Steel	galvanized	ISO 15552
<b>5239010092</b>	320	59.1	45	222 +0,5	-	7	Steel	galvanized	ISO 15552
<b>3661302000</b>	25 / 32	19	25	29.2	-	2,4	Steel	nitrocarburized	-
<b>3661303000</b>	40 / 50	21	12	34.4	-	2,8	Steel	nitrocarburized	-
<b>3661304000</b>	63 / 80	28	16	48.4	-	2,8	Steel	nitrocarburized	-
<b>3661306000</b>	100	40	20	58.4	-	3,3	Steel	nitrocarburized	-
<b>3661310000</b>	125	40	25	69.4	-	3,8	Steel	nitrocarburized	-
<b>3661312000</b>	125 / 160	42	30	86.5	-	4,7	Steel	nitrocarburized	-
<b>3671312000</b>	160 / 200	53	30	93.8	-	5,1	Steel	nitrocarburized	-
<b>3661320000</b>	200	60	35	99.5	-	5,2	Steel	nitrocarburized	-
2990601302	32	9,6	10	30	-	2,4	Stainless steel, acid-proof	-	-

## Cylinder accessories → Cylinder mountings; series CM1

## AA4 axle

Part No.	Piston Ø	Ø d 1)	EK e8	EL	L	L6 1)	Material	Surface	Standardization
2990601303	40	11,5	12	36	-	2,4	Stainless steel, acid-proof	-	-
2990601304	50	15,2	16	48,2	-	2,8	Stainless steel, acid-proof	-	-
2990601306	63	19	20	58,2	-	3,3	Stainless steel, acid-proof	-	-
2990601310	80	23,9	25	70,2	-	3,3	Stainless steel, acid-proof	-	-
2990601312	100	28,6	30	86,5	-	4,6	Stainless steel, acid-proof	-	-
2990601313	125	28,6	30	94,5	-	4,6	Stainless steel, acid-proof	-	-
2990601320	160	33	35	99,5	-	5,1	Stainless steel, acid-proof	-	-

Part No.	Weight [kg]	Fig.								
<b>1823120020</b>	-	Fig. 1								
<b>1823120021</b>	-	Fig. 1								
<b>1823120022</b>	-	Fig. 1								
<b>1823120023</b>	-	Fig. 1								
<b>1823120024</b>	-	Fig. 1								
<b>1823120025</b>	-	Fig. 1								
<b>5236000092</b>	-	Fig. 2								
<b>5237000092</b>	-	Fig. 2								
<b>5239000092</b>	-	Fig. 2								
<b>5239010092</b>	-	Fig. 2								
<b>3661302000</b>	-	Fig. 2								
<b>3661303000</b>	-	Fig. 2								
<b>3661304000</b>	-	Fig. 2								
<b>3661306000</b>	-	Fig. 2								
<b>3661310000</b>	-	Fig. 2								
<b>3661312000</b>	-	Fig. 2								
<b>3671312000</b>	-	Fig. 2								
<b>3661320000</b>	-	Fig. 2								
2990601302	0.03	Fig. 2								
2990601303	0.04	Fig. 2								
2990601304	0.1	Fig. 2								
2990601306	0.16	Fig. 2								
2990601310	0.3	Fig. 2								
2990601312	0.3	Fig. 2								
2990601313	0.58	Fig. 2								
2990601320	0.83	Fig. 2								

1) Max.