


Tooling NO.
CN36 : 950613
DB25 : 950612
Screw : 982033

REVISIONS			
DATE	LTR	DESCRIPTION	APVD.

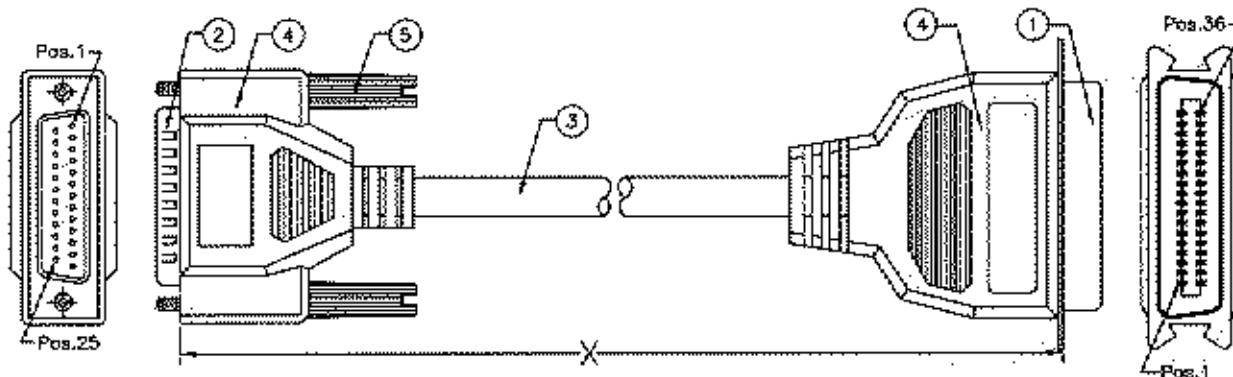

PIN ASSIGNMENT :

DB25 M.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	Shell	
	<u>Black</u>	<u>Brown</u>	<u>Red</u>	<u>Orange</u>	<u>Yellow</u>	<u>Green</u>	<u>Blue</u>	<u>Purple</u>	<u>Gray</u>	<u>White</u>	<u>Pink</u>	<u>Light Green</u>	<u>Black/White</u>	<u>Brown/White</u>	<u>Red/White</u>	<u>Orange/White</u>	<u>Green/White</u>	<u>Blue/White</u>	<u>Purple/White</u>	<u>Red/Black</u>	<u>Orange/Black</u>	<u>Yellow/Black</u>	<u>Green/Black</u>	<u>Gray/Black</u>	<u>Pink/Black</u>		
CN36 M.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	30	Shell

Specifications

Shielding	100% of Mylar Foil
Current Rating	2A max
Operating Voltage	300V max
Temperature Rating	60°C
Contact Resistance	15m ohm max
Mating Cycles	250

ITEM	Item No	Part No	Length
1	CC36MD25M28250060NM-14E	182-4008	1800 ^{±30}
2	CC36MD25M28250082NM-14E	182-4015	2500 ^{±30}
3	CC36MD25M28250164NM-14E	182-4021	5000 ^{±30}


5	2	EA	4-1487207-6	#4-40 4*46.5 Thumbscrew Moding PVC: Beige
4		KG	0-1487209-5	Molded PVC Color: Beige
3	1	EA	5-1487243-4	Non-UL,28AWG,25C+AL/Foil+Drain, Color:Beige
2	1	EA	2-1487176-3	DB25 Male Contact:Gold Flash,Solder Type, Shell: Nickel Plated, Insulation Color: Black.
1	1	EA	4-1487179-7	CN36 Male, Contact: Gold Flash,Shell:Nickel Plated, Insulation Color: Black Color.

UNLESS OTHERWISE SPECIFIED
TOLERANCE :
X .±0.2
X.X .±0.1
X.XX .±0.05
DO NOT SCALE DRAWING

DRAWN BY: *Zhang Jing*
CHECKED BY: *Chen J*
APPROVED BY: *[Signature]*
DWG NO: DEWJ2001051602X0

TITLE 2 meter parallel printer cable			
SIZE A	UNIT MM	PART NO. 182-40XX	REV X0
SCALE 1 : 1	THIRD ANGLE PROJECTION		PAGE 1 OF 2
DATE 05/16/2001		ITEM NO. CC36MD25M2825XXXXNM-14E	

ITEM	QTY	U/M	PART NO.	DESCRIPTION
------	-----	-----	----------	-------------

SUBJECT	NON-UL,25C*28AWG+Drain+Al/Mylar		Electrical & Physical Characteristics		
ITEM		SPECIFICATION	Color Code: 1.Black 2.Brown 3.Red 4.Orange 5.Yellow 6.Green 7.Blue 8.Purple 9.Grey 10.White 11.Pink 12.Light Green 13.Black/White 14.Brown/White 15.Red/White 16.Orange/White 17.Green/White 18.Blue/White 19.Purple/White 20.Red/Black 21.Orange/Black 22.Yellow/Black 23.Green/Black 24.Grey/Black 25.Pink/Black		
Conductor	AWG	28AWG			
	Material	Tinned Copper			
	Cond.Size	7/0.12mm			
Insulation	Min.Avg.Thickness	0.20mm			
	Material	PVC			
	O.D.	0.85±0.05mm			
Drain	NO.	25C			
	AWG	26AWG			
	Material	Tinned Copper			
Al/Mylar	Size	7/0.16mm			
	Coverage	100%			
	Overlap	25% Min.			
Jacket	Min.Avg.Thickness	0.76mm			
	Material	PVC			
	Color	BG01			
	O.D.	7.0±0.15mm			
CONSTRUCTION DRAWING  PVC Jacket Al/Mylar Conductor Insulation Drain			Marking		
			Remark		
			UNLESS OTHERWISE SPECIFIED TOLERANCE : X ±0.2 X/2 ±0.1 X/XX ±0.05 ANGLES : ±2° DO NOT SCALE DRAWING		
DRAWN BY	Zhang Jing				
CHECKED BY	[Signature]				
APPROVED BY	[Signature]				
DWG NO.	DEWJ2001051602X0				
TITLE CABLE SPECIFICATION PART NO. WNUHBE025XXXX01 SCALE 1 : 1 THIRD ANGLE PROJECTION REV X0 PAGE 2 OF 2 DATE 05/18/2001					