


1825374-6 Product Details

[Share](#) [Print](#) [Email](#)


1825374-6

TE Internal Number:
1825374-6

 **Active**

DIP Sockets

 Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Socket Style = Standard
- Through Hole Contact Termination Type
- 2.54 mm Centerline
- Row-to-Row Spacing = 7.87 mm
- 20 Positions

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [DIP SOCKET ASSY, LADDER, DIPLOMATE, RET. LEAD .300 C...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- [DIPLOMATE Dual Leaf \(DL\) Low-Profile DIP Sockets](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

[List all Documents](#)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Profile = Standard
- [Frame Style](#) = Ladder
- [Leg Style](#) = Retention
- Color = Black
- Qty. Tubes/Box = 100
- Product Series = Standard

Electrical Characteristics:

- Insulation Resistance (MΩ) = 10,000
- Contact Resistance (mΩ) = 30

Termination Features:

- [Contact Termination Type](#) = Through Hole
- [Termination Post Length \(mm \[in\]\)](#) = 3.05 [0.120]

Dimensions:

- [Height Above PC Board \(mm \[in\]\)](#) = 5.33 [0.210]

Body Features:

Housing Features:

- [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]
- Housing Material = Thermoplastic - GF
- UL Flammability Rating = UL 94V-0

Configuration Features:

- [Number of Positions](#) = 20

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Temperature Range (°C) = 125

- Row-to-Row Spacing (mm [in]) = 7.87 [0.310] - Mount Style = Vertical Contact Features: - Socket Style = Standard - Contact Base Material = Phosphor Bronze - Contact Plating, Mating Area, Material = Gold (15) - Contact Style = Stamped + Formed - Mating Contact Type = Dual Leaf - Solder Tail Contact Plating = Tin	Operation/Application: - Application = Production Packaging Features: - Packaging Method = Tube - Qty./Tube = 21 Other: - Brand = TE Connectivity - Proprietary Name = DIPLOMATE DL - Comment = ONLY sockets with straight solder tails are recommended for automatic insertion.
--	--

Corporate Information

- About TE
- Investors
- News Room
- Supplier Portal
- Careers
- Terms & Conditions
- Privacy Policy

Quick Links

- Distributor Inventory
- Product Cross Reference
- Documents & Drawings
- Product Compliance Support Center
- Site Map






Customer Support

- Email or Chat With Us
- Find a Phone Number
- Knowledge Base
- Manage Your Account

Keep Me Informed



LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	ECO-05-013690	02JAN05	BSV	KD
			A1	REVISED PER ECO-09-024927	07NOV09	KK	AEG

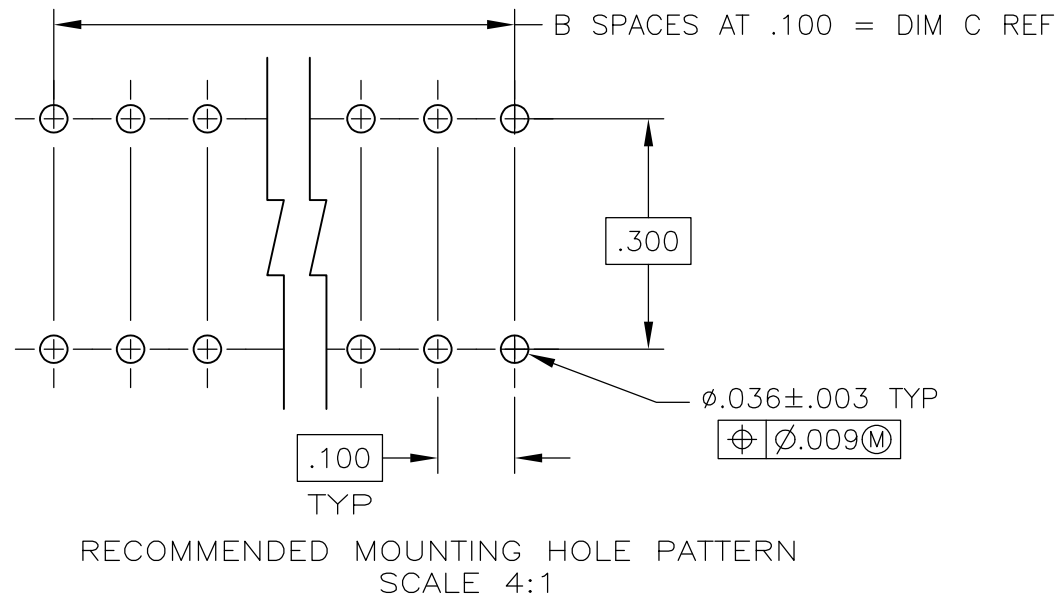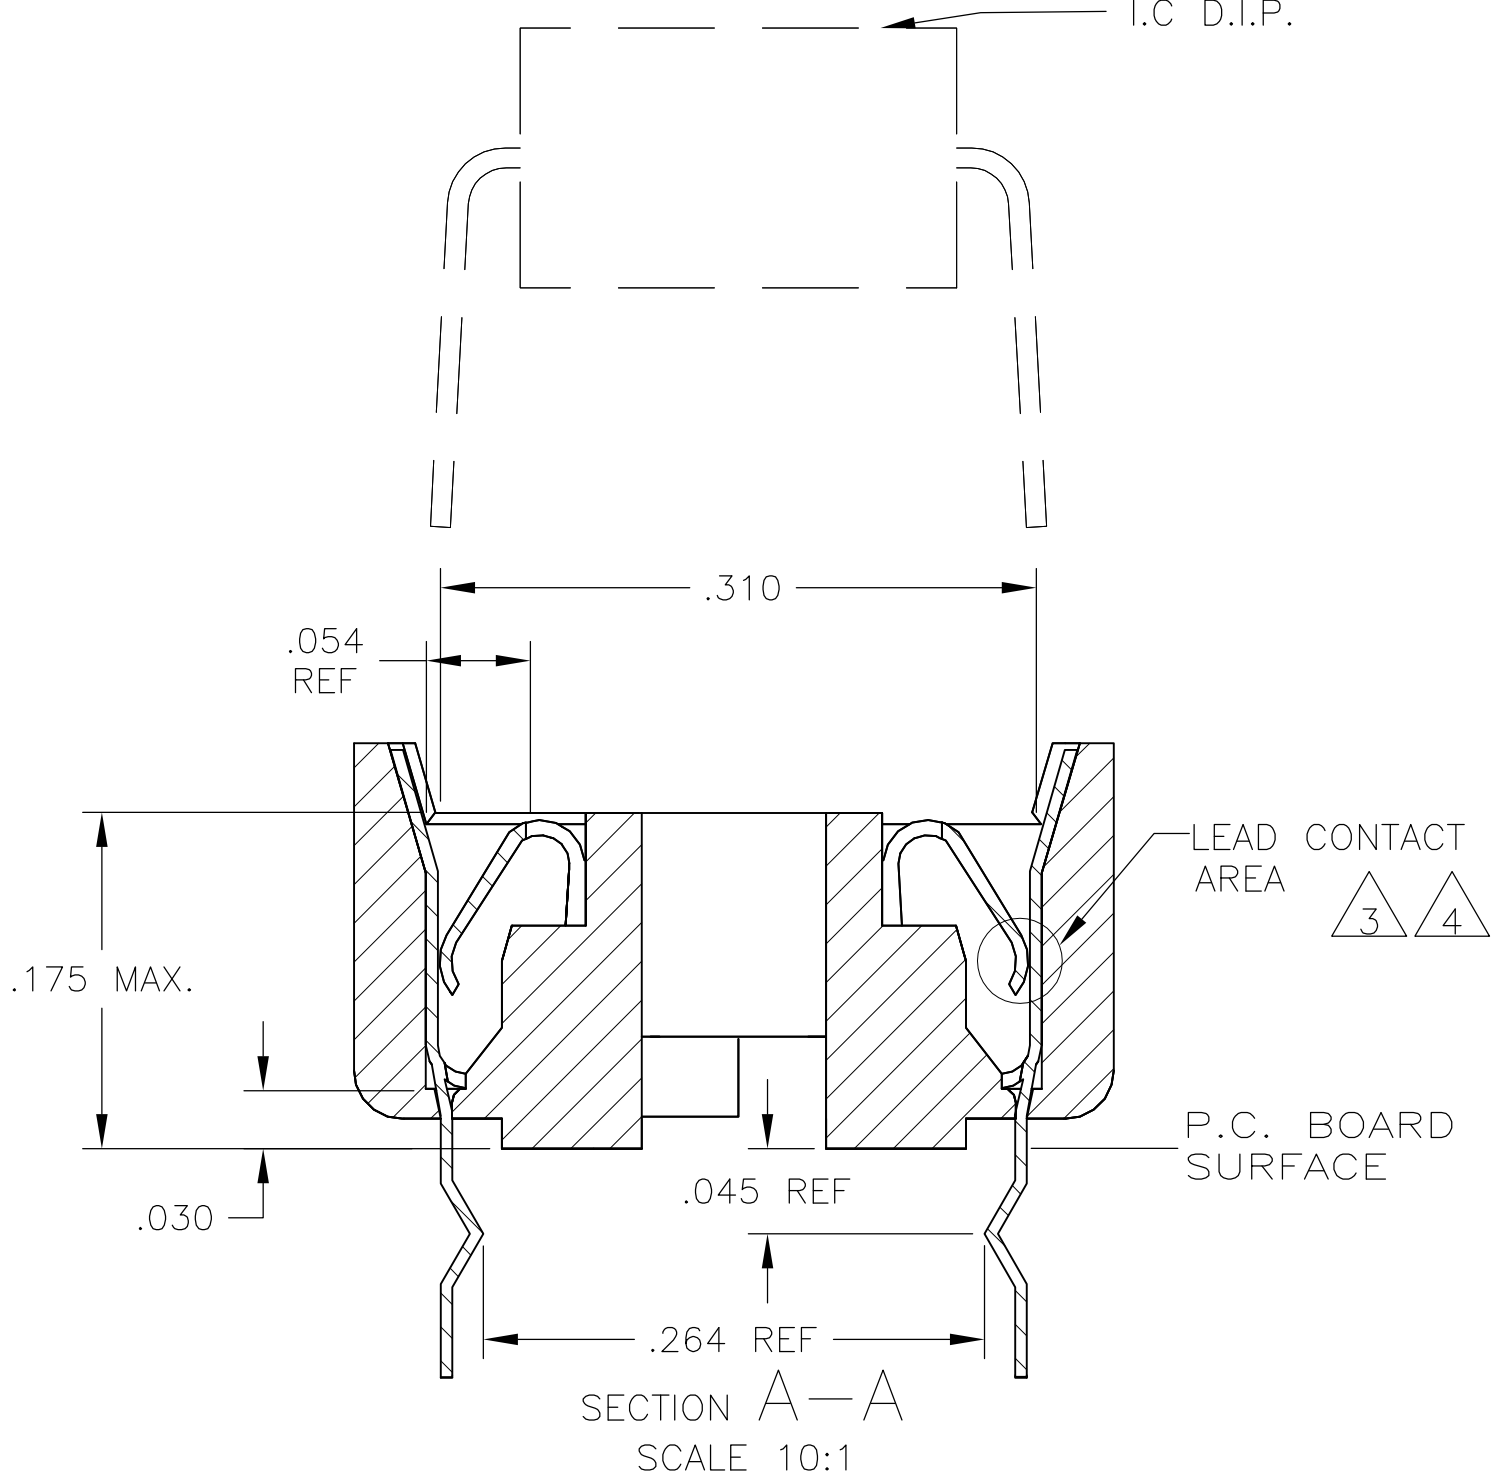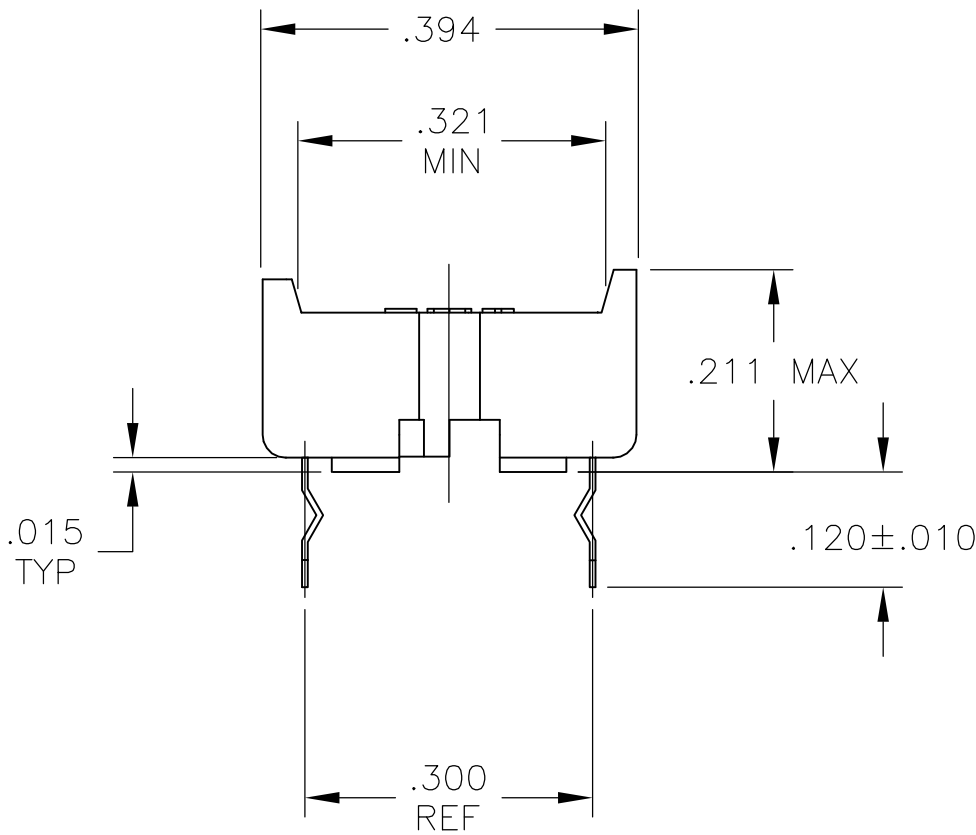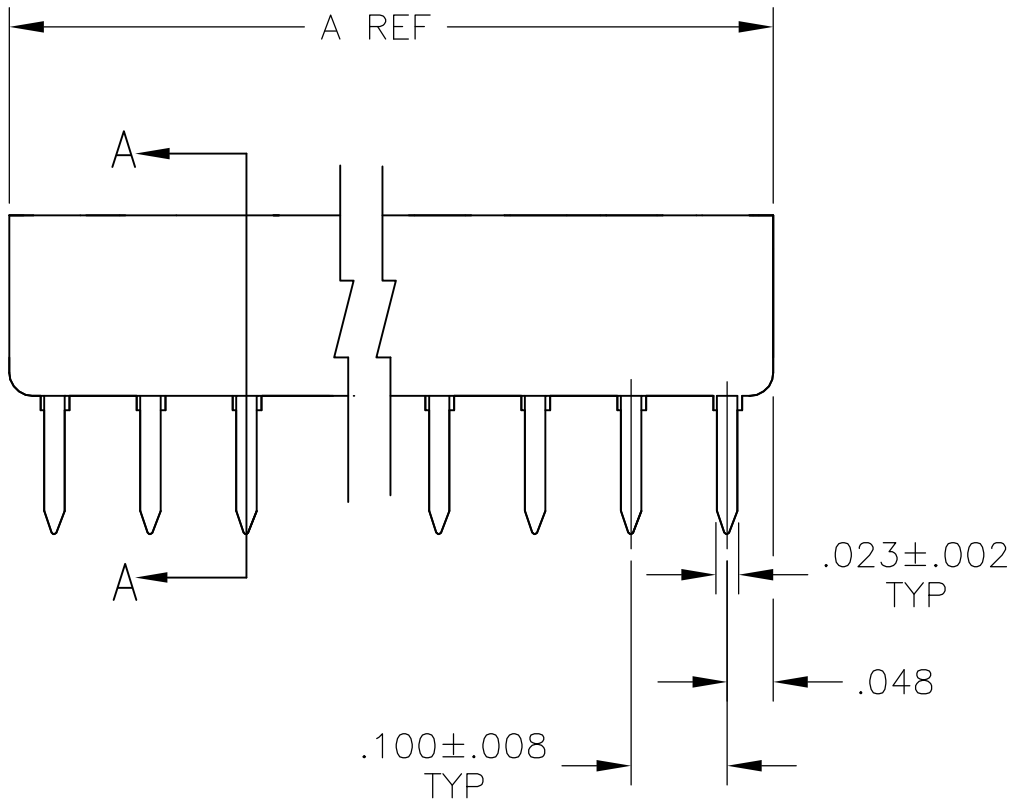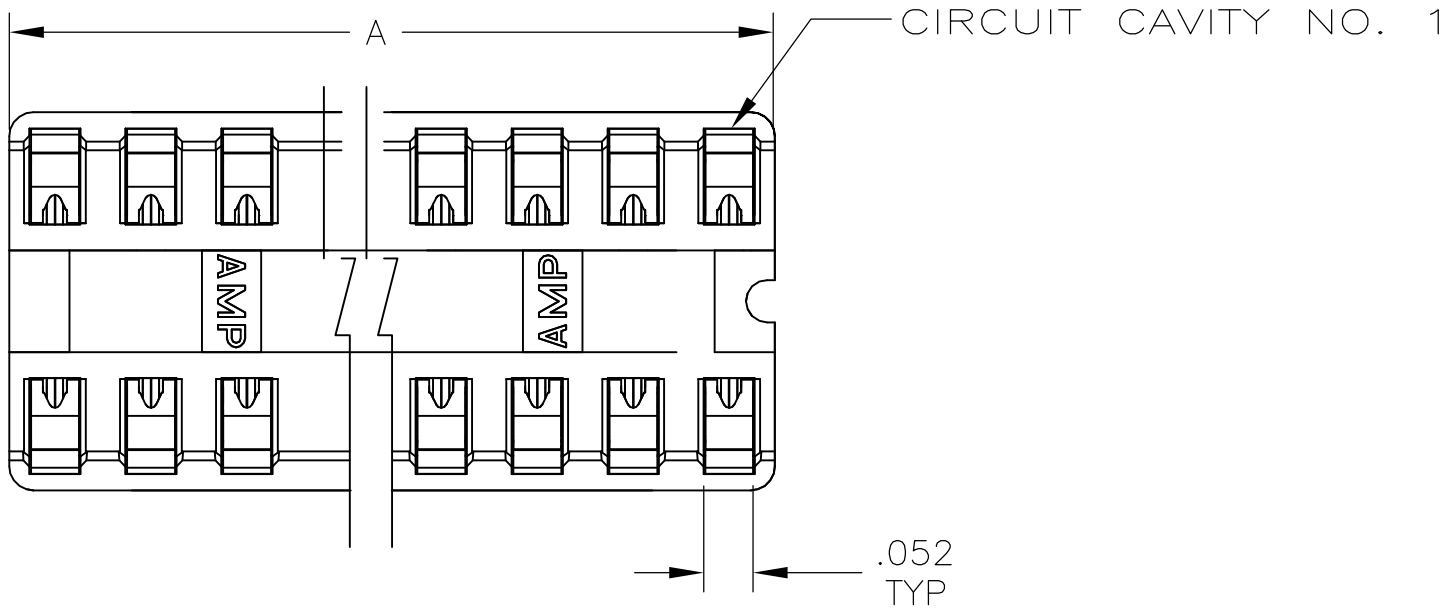

- 1 RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
- 2 TUBE LOADED FOR AUTOMATIC INSERTION.
- 3 BECU CONTACT -PLATED WITH TWO .000030 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 4 PHOS. BRZ CONTACT - PLATED WITH TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 5 GLASS FILLED THERMOPLASTIC, 94V-0, BLACK
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE 6	3	1.100	11	1.195	24	1-1825374-7
	3	.900	9	.995	20	1-1825374-6
	3	.800	8	.895	18	1-1825374-5
	3	.700	7	.795	16	1-1825374-4
	3	.600	6	.695	14	1-1825374-3
	3	.300	3	.395	8	1-1825374-2
OBSOLETE 6	4	1.100	11	1.195	24	1825374-7
	4	.900	9	.995	20	1825374-6
	4	.800	8	.895	18	1825374-5
OBSOLETE 6	4	.700	7	.795	16	1825374-4
	4	.600	6	.695	14	1825374-3
	4	.300	3	.395	8	1825374-2
	4	.200	2	.295	6	1825374-1
CONTACT & FINISH		DIM. C B	SPCS	DIM. A	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA	21APR05		Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK K WRIGHT	APVD -		NAME	
		PRODUCT SPEC 108-1066		SIZE		
		APPLICATION SPEC 114-1049		CAGE CODE		
MATERIAL SEE TABLE		WEIGHT -		DRAWING NO A2 00779		RESTRICTED TO -
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± 0°30' FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1