

Electrical connection technologies ▶ Round plug connector

Connecting cable, Series CN2

▶ Socket, M12x1, 5-pin, A-coded, straight ▶ without wire end ferrule, tin-plated, 4-pin



00107009_b

Ambient temperature min./max.
Protection class

-13°F / +158°F
IP67

Materials:
Cable sheath
Cable color


Polyurethane
Black

Technical Remarks

- The specified protection class is only valid in assembled and tested state.

	Operational voltage max.		Max. current [A]	Number of wires	Wire cross-section [mm ²]	Cable length L [ft.]	Weight [lbs]	Part No.
	[V AC]	[V DC]						
	48	48	4	4	0.34	9.84	0.2888	1834484256
						16.4	0.4431	1834484257
						32.81	0.8774	1834484258

Dimensions

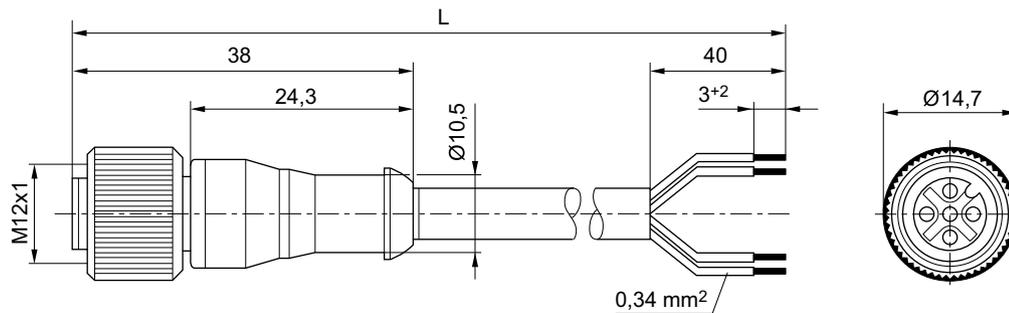

L = length

00127651


All dimensions in mm, unless specified otherwise.

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information

Pneumatics catalog, online PDF, as of 2016-10-21, ©AVENTICS S.à r.l., subject to change

Connecting cable, Series CN2

▶ Socket, M12x1, 5-pin, A-coded, straight ▶ without wire end ferrule, tin-plated, 4-pin

Pin assignment

Buchse_A-Codiert

- (1) BN=brown
- (2) WH=white
- (3) BU=blue
- (4) BK=black
- (5) not assigned