


Base strip - MC 1,5/17-GF-3,5 - 1843949

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


Header, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 17, pitch: 3.5 mm, Color: green, Contact surface: Tin, mounting: Wave soldering

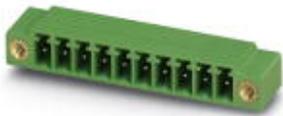

The figure shows a 10-position version of the product

Why buy this product

- ✓ Well-known mounting principle allows worldwide use
- ✓ Screwable flange for superior mechanical stability
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies

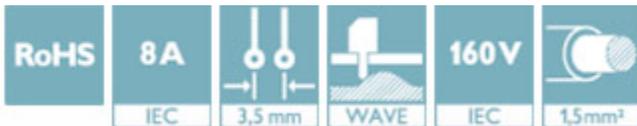

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 113056
GTIN	4017918113056
Weight per Piece (excluding packing)	5.520 g
Custom tariff number	85366930
Country of origin	Germany

Technical data

Dimensions

Length	9.2 mm
Pitch	3.5 mm
Dimension a	56.00 mm
Width	69.85 mm
Constructional height	7.25 mm

Base strip - MC 1,5/17-GF-3,5 - 1843949

Technical data

Dimensions

Height	10.65 mm
Length of the solder pin	3.4 mm
Pin dimensions	0,8 x 0,8
Hole diameter	1.2 mm

General

Range of articles	MC 1,5/...-GF
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	160 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A
Maximum load current	8 A
Insulating material	PBT
Flammability rating according to UL 94	V0
Color	green
Number of positions	17

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CSA
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Base strip - MC 1,5/17-GF-3,5 - 1843949

Diagram

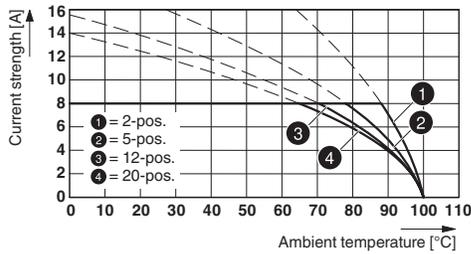


Dimensional drawing

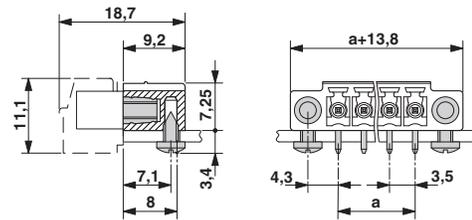


Type: FK-MCP 1,5/...-STF-3,5 with MC 1,5/...-GF-3,5

Drilling diagram

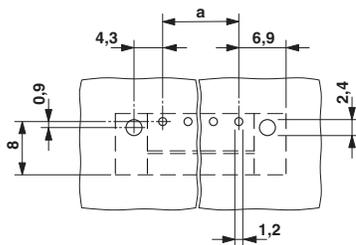

Diagram

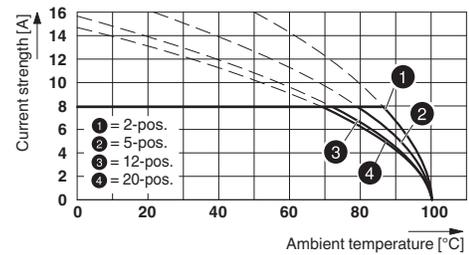

Type: MC 1,5/...-STF-3,5 with MC 1,5/...-GF-3,5

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637
ETIM 6.0	EC002637

Base strip - MC 1,5/17-GF-3,5 - 1843949

Approvals

Nominal voltage UN	160 V
--------------------	-------

CCA	CCA/ DE1 34219
Nominal current IN	8 A
Nominal voltage UN	160 V

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-20110128
	B	D	
Nominal current IN	8 A	8 A	
Nominal voltage UN	300 V	300 V	

EAC		B.01742
-----	------------------------------------------------------------------------------------	---------

Accessories

Accessories

Coding element

Coding profile - CP-MSTB - 1734634

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



Fiber optics

Fiber optics - MC 1,5/10-LWL 1,5-3,5 - 1841161



Base strip - MC 1,5/17-GF-3,5 - 1843949

Accessories

Fiber optics - MC 1,5/10-LWL 2,3-3,5 - 1841187



Fiber optics - MC 1,5/10-LWL 4-3,5 - 1841200



Labeled terminal marker

Marker card - SK 3,5/2,8:FORTL.ZAHLEN - 0804073



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, for terminal block width: 3.5 mm, Lettering field: 3.5 x 2.8 mm

Additional products

Printed-circuit board connector - MC 1,5/17-STF-3,5 - 1847275



Plug component, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 17, pitch: 3.5 mm, connection method: Screw connection with tension sleeve, Color: green, Contact surface: Tin

Printed-circuit board connector - FK-MCP 1,5/17-STF-3,5 - 1940240



Plug component, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 17, pitch: 3.5 mm, connection method: Push-in spring connection, Color: green, Contact surface: Tin

Base strip - MC 1,5/17-GF-3,5 - 1843949

Accessories

Printed-circuit board connector - FMC 1,5/17-STF-3,5 - 1966240



Plug component, nominal current: 8 A, rated voltage (III/2): 160 V, number of positions: 17, pitch: 3.5 mm, connection method: Push-in spring connection, Color: green, Contact surface: Tin
