




Mounting hole (inch)	0.2362"
Mounting hole (metric)	6mm
Indicator type	standard
Mounting type	with bezel
Bezel type	prominent
Bezel material	metal
Bezel color	black chrome
Bezel size	M6
Protection	IP40
Lens type	round
Lens color	white diffused
Lens size	3mm
Connector Tpe	tab terminals 2.0x0.5mm
Connector number	2
Connector for lamp test	no
Number LED chip	1
Indicator color	white
Dom wave length	0.31 / 0.32
Peak Wave Lenght (mA)	
Op. voltage (V)	12V DC
Forward volt max.	
Rectifier	Protection Diode
AC current	-
DC current	18mA
Lum in min (mcd)	
Lum in type (DC)	430mcd

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1902	Print date : 12/09/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :

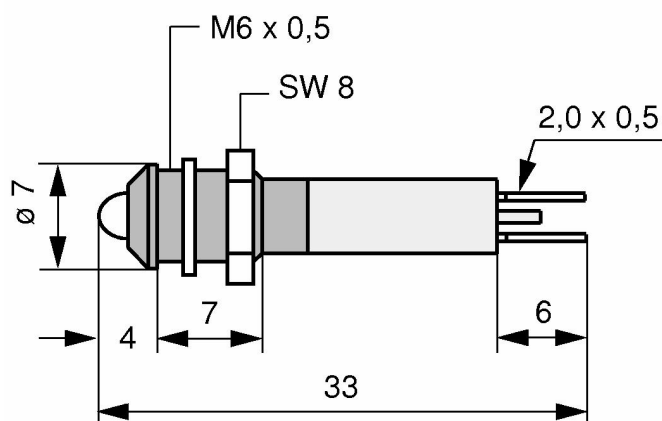

Part Number : 1902125W
Serial Number : 1902
LEDs Indicators

Voltage tolerance (%)	10%
Op. temperature (°C)	-25°C...+60°C
Storage temperature (°C)	-25°C...+60°C
Narrative	
Viewing angle (°)	
ROHS Status	Yes

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1902	Print date : 12/09/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :