

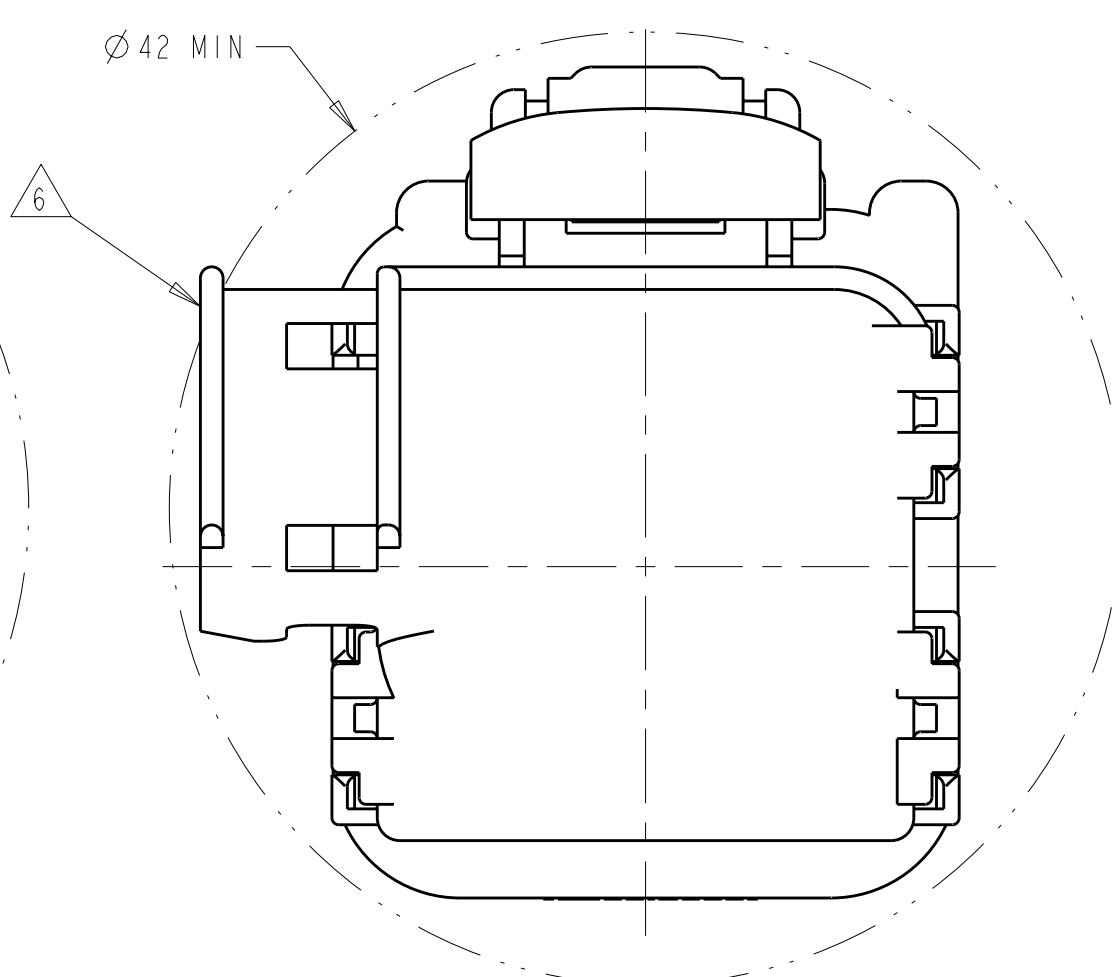



OPTION "F"

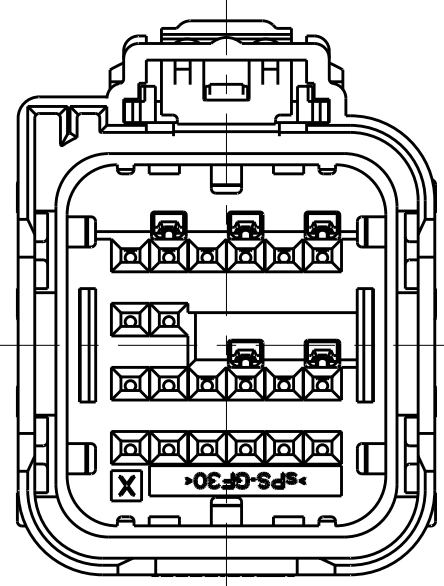

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

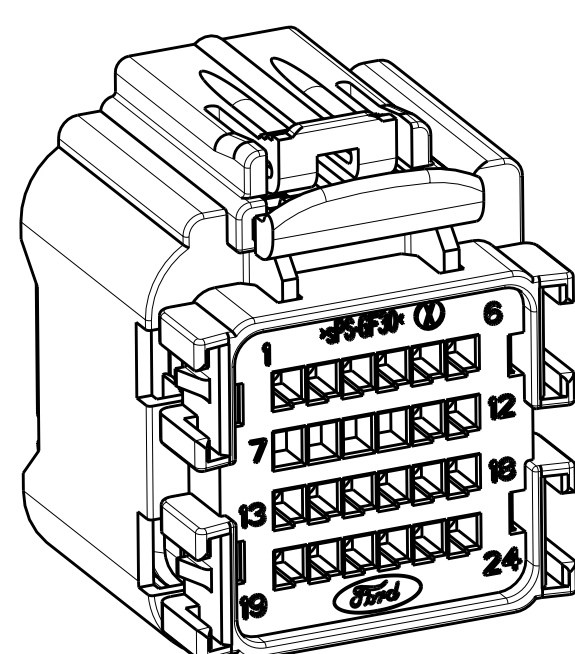

SCALE 2:1

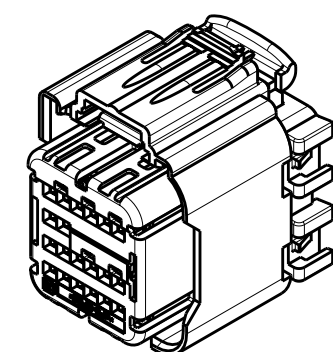

KEYING OPTION "A" SHOWN

Prof/ENGINEER DRAWING

					7	8	9	10	11						17	18				23	Y	3-1924672-0	KEY B	
					7	8	9	10	11						17	18				23	Y	2-1924672-9	KEY A	
					7	8	9	10													Y	2-1924672-8	KEY B	
			5	6	7	8	9	10							17	18	19			23	24	Y	2-1924672-7	KEY A
			5	6	7	8	9	10							17	18	19	20		23	24	Y	2-1924672-6	KEY A
					7	8	9	10							17	18	20	21	22		Y		2-1924672-5	KEY A
					7	8	9	10						15		18	20			23	24	Y	2-1924672-4	KEY A
					7	8	9	10						15		18				23	24	Y	2-1924672-3	KEY A
				5	6	7	8	9	10		13	14			17	18	19			23	24	Y	2-1924672-2	KEY A
			5	6	7	8	9	10			13	14			17	18	19	20		23	24	Y	2-1924672-1	KEY A
			5	6	7	8	9	10			13	14	15		17	18		21		23	Y	2-1924672-0	KEY A	
					7	8	9	10					15	17	18					23	24	Y	1-1924672-9	KEY A
					7	8	9	10					15	17	18			21		23	24	Y	1-1924672-8	KEY A
					7	8	9	10							18	19	21			23	24	Y	1-1924672-7	KEY A
					7	8	9	10							18	19				23	24	Y	1-1924672-6	KEY A
					7	8	9	10					15		18	20	21			23	24	Y	1-1924672-5	KEY A
					7	8	9	10				15		17	18	20	21			23	24	Y	1-1924672-4	KEY A
					7	8	9	10				15		17	18	20	21	22		23	24	Y	1-1924672-3	KEY A
					7	8	9	10						17	18					23	Y		1-1924672-2	KEY A
					7	8	9	10						17	18	19	21			23	24	Y	1-1924672-1	KEY A
					7	8	9	10						17	18	19	20	21		23	24	Y	1-1924672-0	KEY A
					7	8	9	10					15	17	18	20				23	24	Y	1924672-9	KEY A
			5	6	7	8	9	10							18	20	21			23	24	Y	1924672-8	KEY A
					7	8	9	10						17	18	20	21			23	24	Y	1924672-7	KEY A
					7	8	9	10						17	18					23	24	Y	1924672-6	KEY A
					7	8	9	10						17	18	20	21	22		24	Y		1924672-5	KEY A
					7	8	9	10						17	18	19	20	21	22		24	Y	1924672-4	KEY A

[illegible]

BLANK CAVITIES INDICATE
OPEN TERMINAL HOLE POSITIONS

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1924672-4](#)