



QM MULTIPOLE CONNECTORS

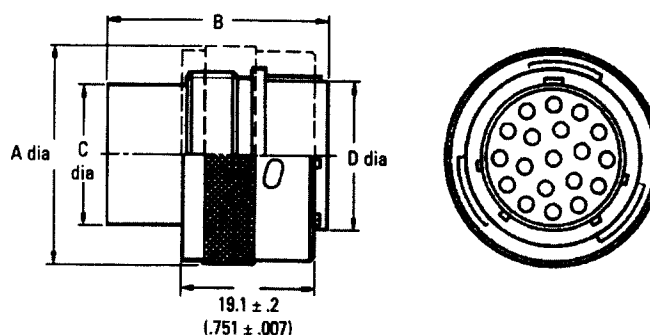

RS		Shell Size	Dimensions			
Stock No.						
	A ± .2 (.007)		B Max	C ± .15 (.005)	D ± .15 (.005)	
4-way	467-223	10	21.6 (.850)	31.8 (1.252)	10.9 (.429)	12.2 (.480)
7-way	474-530	18	34.3 (1.350)	33.0 (1.299)	22.5 (.885)	24.0 (.944)
8-way	467-239	12	24.8 (.976)	31.8 (1.252)	13.8 (.543)	15.1 (.594)
12-way	474-883	14	28.0 (1.102)	31.8 (1.252)	17.0 (.669)	18.3 (.720)
19-way	467-245	16	31.2 (1.228)	31.8 (1.252)	19.9 (.783)	21.4 (.842)
23-way	474-546	18	34.3 (1.350)	31.8 (1.252)	22.4 (.881)	24.0 (.944)
28-way	474-899	20	37.5 (1.476)	31.8 (1.252)	25.6 (1.007)	27.1 (1.066)
35-way	467-251	22	40.7 (1.602)	31.8 (1.252)	28.5 (1.122)	30.4 (1.196)
48-way	474-906	24	43.9 (1.728)	31.8 (1.252)	31.7 (1.248)	33.5 (1.318)

UNSEALED CABLE CLAMPS - STRAIN RELIEF AND WIRE PROTECTION

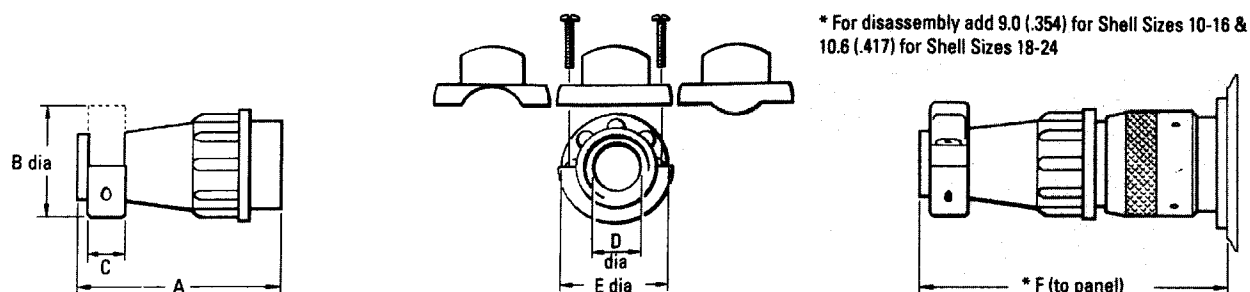

Clamp supplied
with RS Stock No.

	Shell Size	Dimensions					
		A ± .15 (.005)	B Max	C ± .15 (.005)	D Max	E ± .15 (.005)	F Max
467-223	10	39.9 (1.570)	21.5 (.846)	6.4 (.251)	8.7 (.342)	21.0 (.826)	61.3 (2.413)
467-239	12	40.0 (1.574)	24.9 (.980)	6.4 (.251)	12.8 (.503)	24.0 (.944)	61.3 (2.413)
474-883	14	46.0 (1.811)	27.0 (1.063)	6.4 (.251)	13.8 (.543)	27.0 (1.063)	67.1 (2.641)
467-245	16	46.0 (1.811)	30.1 (1.185)	6.4 (.251)	17.0 (.669)	30.2 (1.189)	67.1 (2.641)
474-530 & -546	18	50.0 (1.968)	32.0 (1.259)	7.0 (.275)	19.9 (.783)	33.2 (1.307)	70.8 (2.787)
474-899	20	55.0 (2.165)	34.3 (1.350)	7.0 (.275)	21.0 (.826)	36.4 (1.433)	79.3 (3.122)
467-251	22	60.0 (2.362)	37.1 (1.460)	8.2 (.322)	23.0 (.905)	39.6 (1.559)	85.3 (3.358)
474-906	24	65.0 (2.559)	41.8 (1.645)	8.2 (.322)	27.0 (1.063)	42.8 (1.685)	90.8 (3.574)