

Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




The figure shows a 10-position version of the product

Header, nominal current: 4 A, rated voltage (III/2): 160 V, number of positions: 2, pitch: 2.5 mm, Color: black, Contact surface: Tin, mounting: THR soldering, User information and design recommendations for through hole reflow technology can be found under "Downloads"

Why buy this product

- ✓ Designed for integration into the SMT soldering process

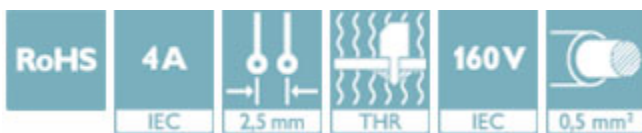

Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
GTIN	 4 017918 912253
GTIN	4017918912253
Weight per Piece (excluding packing)	2.100 g
Custom tariff number	85366930
Country of origin	Germany

Technical data

Dimensions

Length	10.1 mm
Pitch	2.5 mm
Dimension a	2.50 mm
Width	6.90 mm
Constructional height	8.1 mm
Height	11.9 mm

Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Technical data

Dimensions

Length of the solder pin	3.8 mm
Pin dimensions	0,8 x 0,8
Hole diameter	1.4 mm

General

Range of articles	MC 0,5/...-G-THT
Insulating material group	IIIa
Rated surge voltage (III/3)	1.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	32 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Maximum load current	4 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	black
Number of positions	2

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


Drawings

Base strip - MC 0,5/ 2-G-2,5 THT - 1963421


Dimensional drawing



Drilling diagram



Dimensional drawing

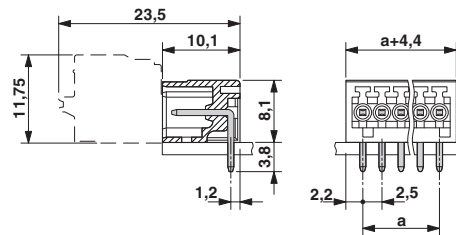

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637
ETIM 6.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409

Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Classifications

UNSPSC

UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCE CB Scheme / CCA / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
		B	
Nominal current I _N		4 A	
Nominal voltage U _N		125 V	

VDE Gutachten mit Fertigungsüberwachung		http://www.vde.com/en/Institute/OnlineService/ VDE-approved-products/Pages/Online-Search.aspx	40013394
Nominal current I _N		4 A	
Nominal voltage U _N		32 V	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
		B	
Nominal current I _N		4 A	
Nominal voltage U _N		125 V	

Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Approvals

IECEE CB Scheme	CB scheme	http://www.iecee.org/	DE1-56068-B1B2
Nominal current I _N	4 A		
Nominal voltage U _N	32 V		

CCA	CCA/ DE1 34250		
Nominal current I _N	4 A		
Nominal voltage U _N	32 V		

EAC	EAC	B.01742	
-----	------------	---------	--

cULus Recognized	cULus	http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	
------------------	--------------	---	--

Accessories

Accessories

Coding element

Coding profile - CP-MC 0,5 - 1881435



Coding profile, is inserted into the groove in the header, red insulating material

Labeled terminal marker

Marker card - SK 2,54/2,8:FORTL.ZAHLEN - 0804853



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, for terminal block width: 2.54 mm, Lettering field: 2.54 x 2.8 mm

Base strip - MC 0,5/ 2-G-2,5 THT - 1963421

Accessories

Additional products

Printed-circuit board connector - FK-MC 0,5/ 2-ST-2,5 - 1881325



Plug component, nominal current: 4 A, rated voltage (III/2): 160 V, number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, Color: green, Contact surface: Tin
