



		1					
LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED PER ECO 08-023142	9-18-08	CT	DW

D


C

B

A

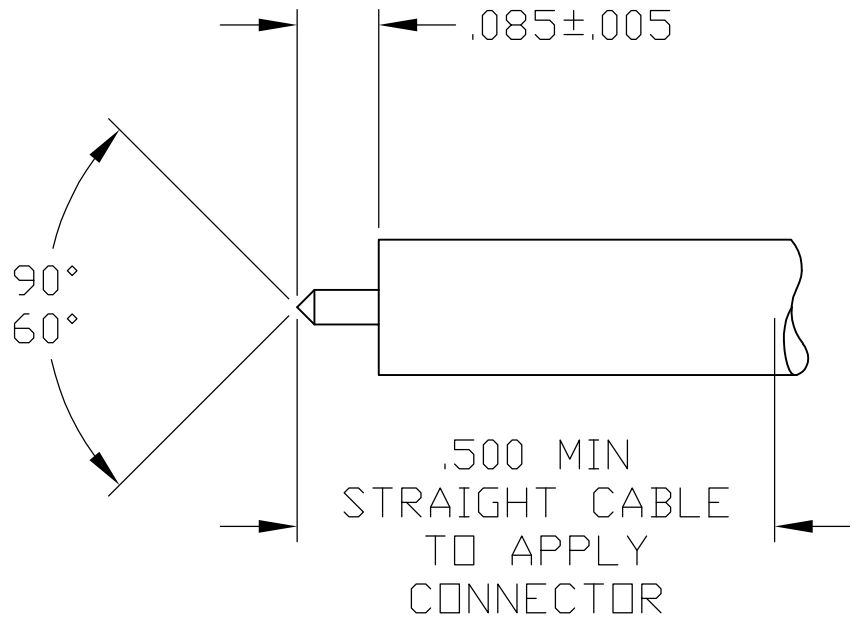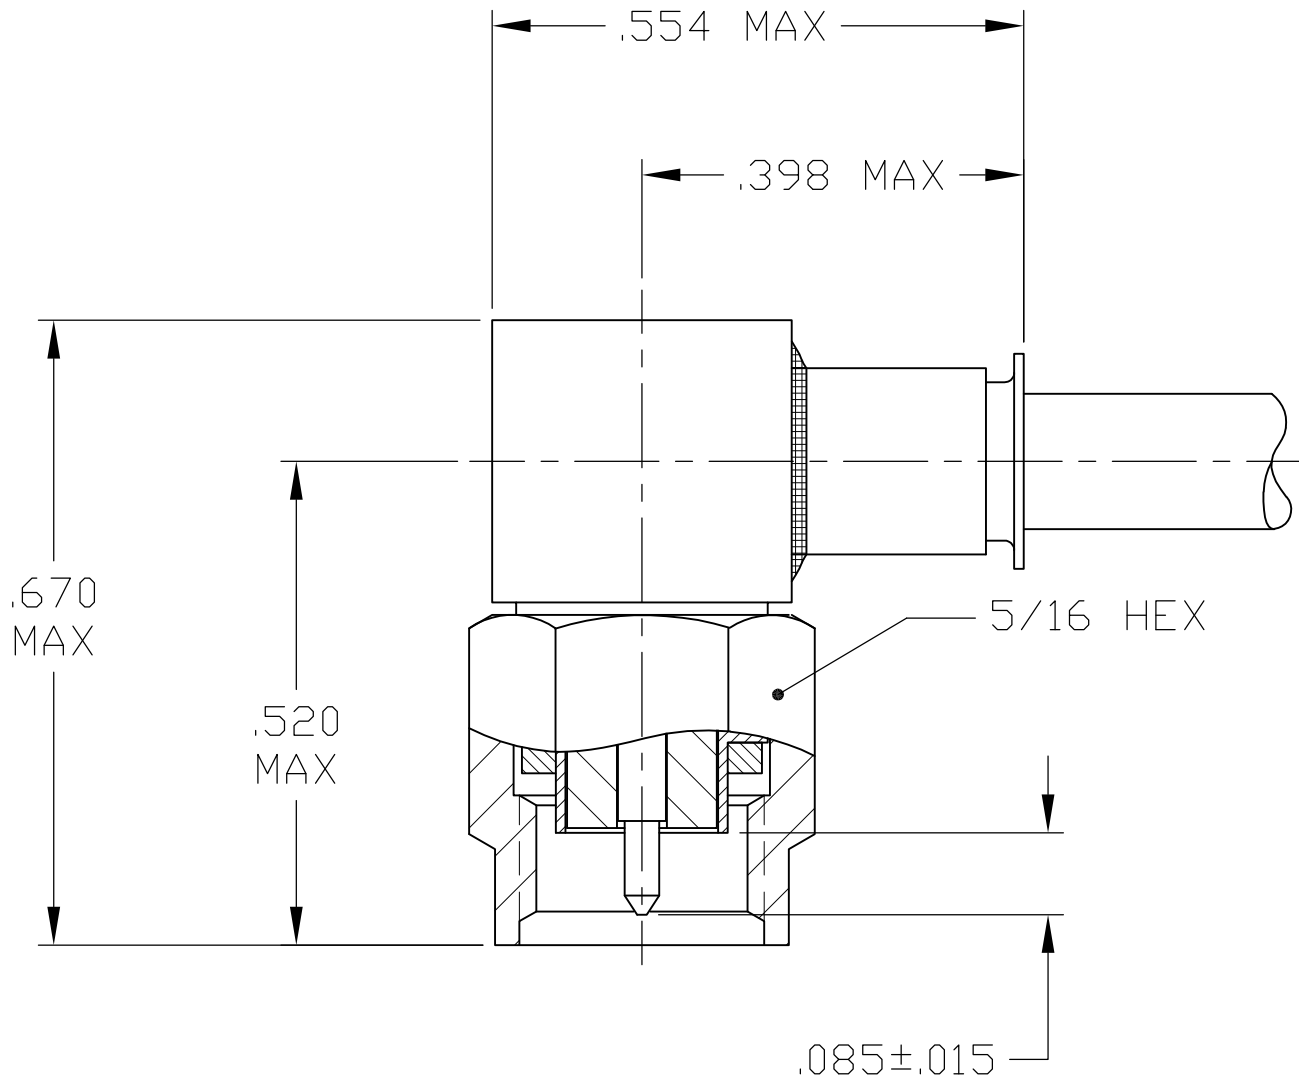

RECOMMENDED STRIP LENGTH

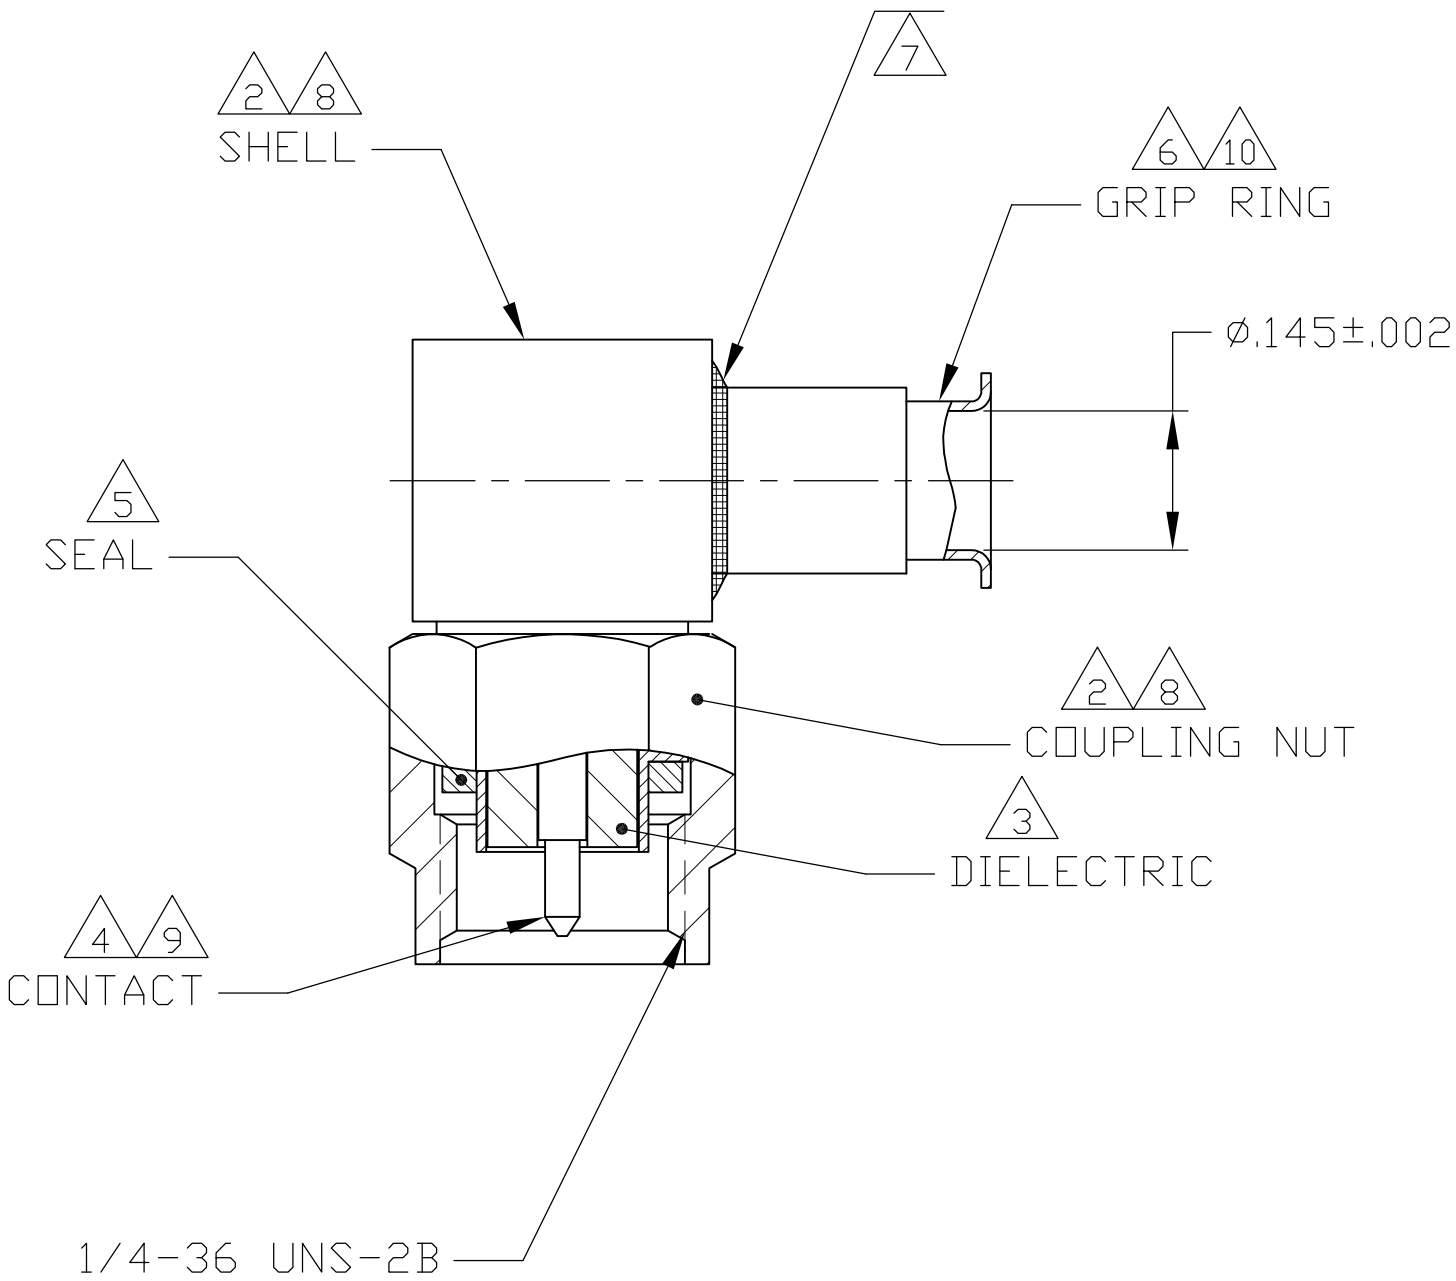

- FOR USE WITH RG-402/U CABLE, (.141 SEMI-RIGID).
- STAINLESS STEEL PER ASTM-A-582.
- PTFE PER MIL-P-19468.
- BERYLLIUM COPPER PER ASTM-B-196.
- SILICONE RUBBER PER ZZ-R-765.
- BRASS PER ASTM-B-16.
- SEALENT
- PASSIVATION PER SAE-AMS-2700.
- GOLD PL PER ASTM-B-488.
- NICKEL PL PER AMS-QQ-N-290.
- FREQUENCY RANGE: 0 - 26.5 GHZ.

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 9-18-08	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608							
		CHK D.WILSON 9-18-08								
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D.WILSON 9-18-08	NAME PLUG,RIGHT ANGLE, WEATHERPROOF,SERIES SMA						
	0 PLC ± -		PRODUCT SPEC							
	1 PLC ± -		—							
	2 PLC ± -		APPLICATION SPEC							
	3 PLC ± .008									
4 PLC ± -		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
MATERIAL		FINISH	WEIGHT	A2	00779	C=1996407	—			
NOTE 2 THRU 7		NOTE 8 THRU 10	CUSTOMER DRAWING				SCALE	SHEET	OF	REV
							5:1	1	1	A

1996407

1996407-1

PART NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1996407-1](#)