

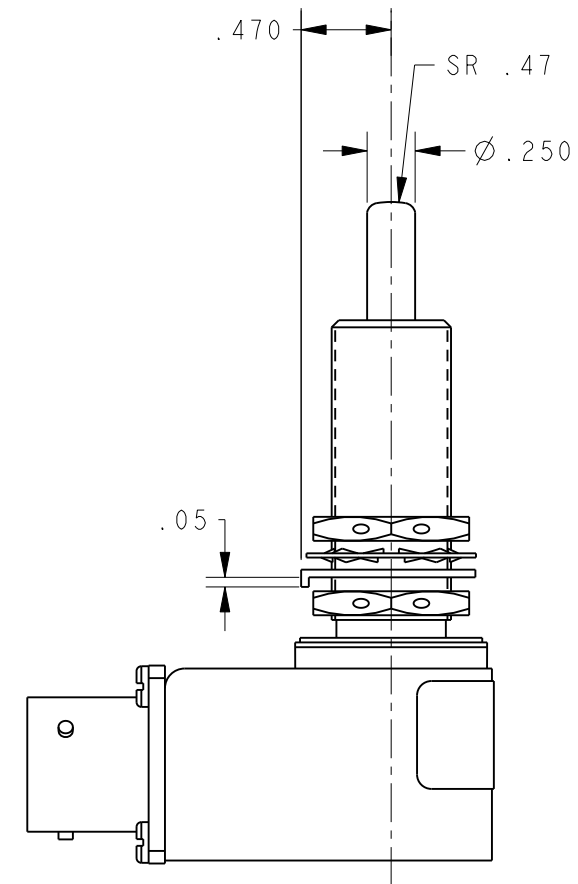
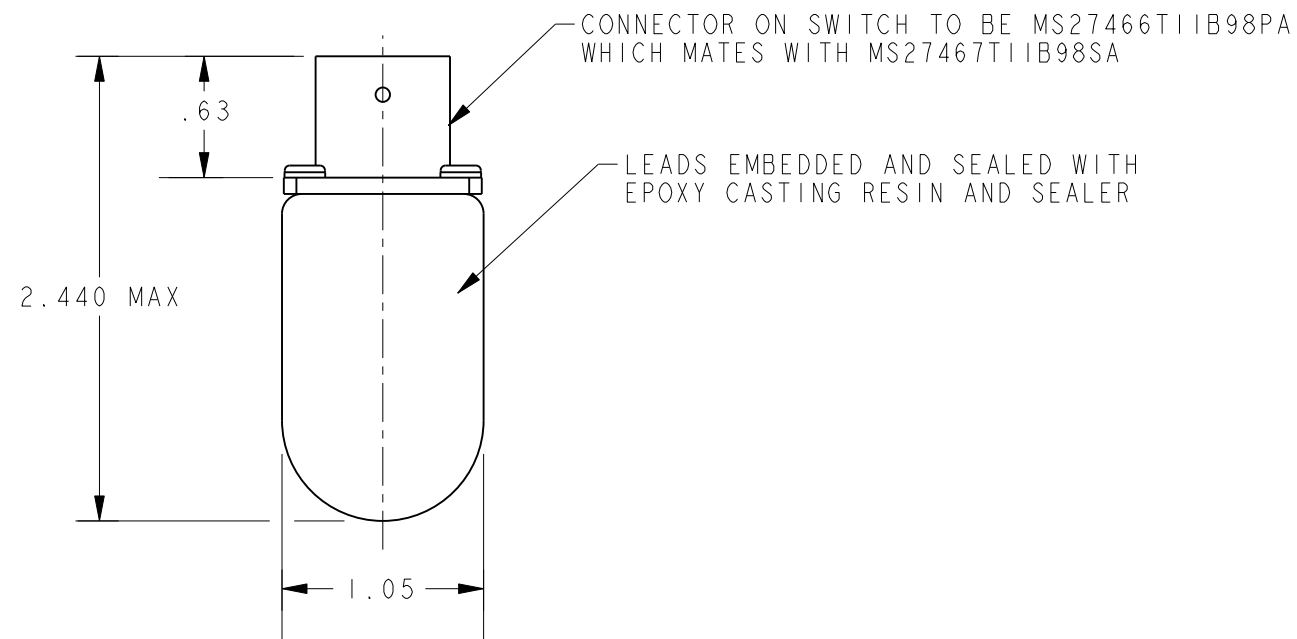


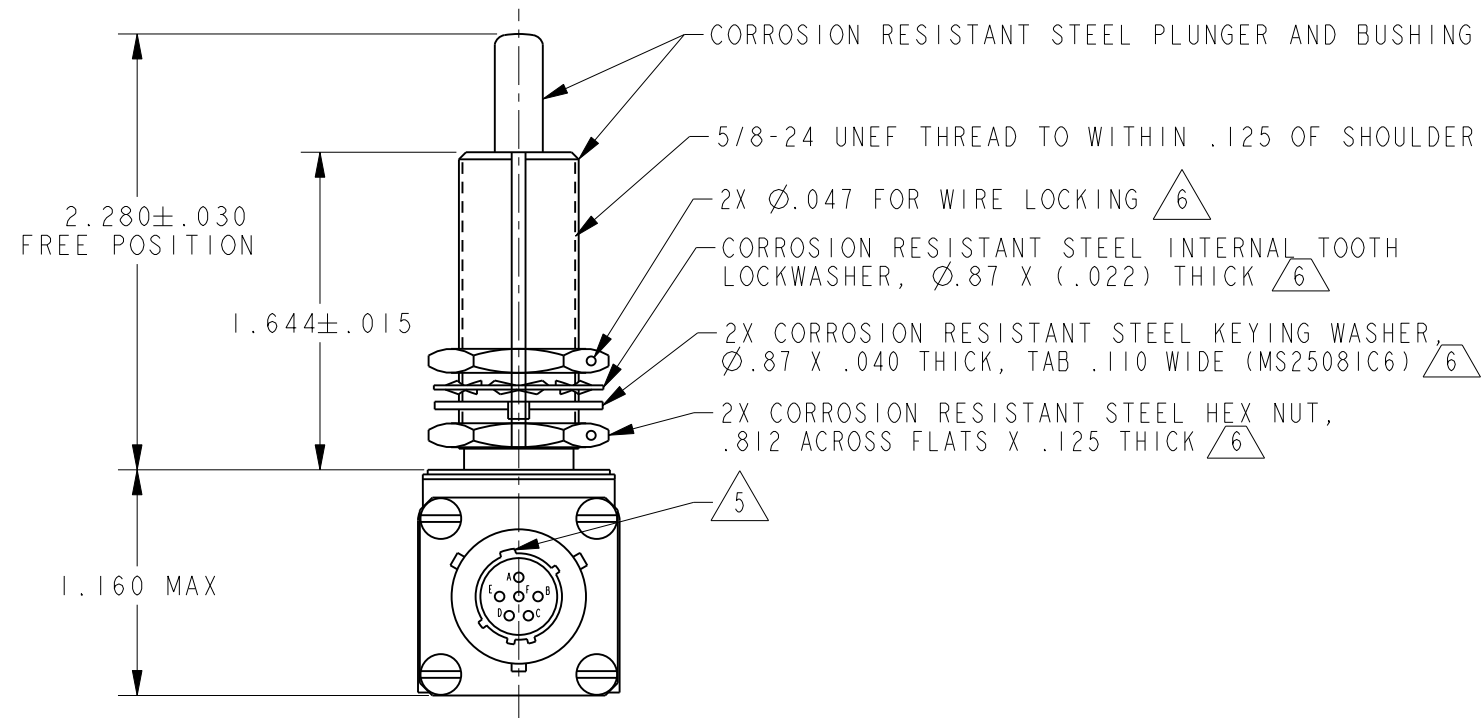

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - UNIT MEETS IMMERSION TEST REQUIREMENTS OF MIL-5272
PROCEDURE I
 - 3 - CIRCUIT DIAGRAM, CATALOG LISTING, FEDERAL MFR NO., AND
CUSTOMER PART NO. ARE SHOWN ON NAMEPLATE
 - 4 - CONTACT OPEN AND CLOSE WITHIN .010
 -  5 MAIN KEYWAY ORIENTED UP
 -  6 HARDWARE MAY BE PACKAGED UNASSEMBLED PER
MIL-PRF-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
OPERATING FORCE ----- 6-12 LB	CONTACT ARRANGEMENT 2 X S P D T		DO NOT SCALE PRINT
DIFFERENTIAL FORCE			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE ----- 4 LB MIN	LOAD	28 VDC	ONE PLACE (.0) ±.030
PRETRAVEL ----- .040 MAX		SEA LEVEL	50,000 FT
DIFFERENTIAL TRAVEL ----- .020 MAX	RES	4	THREE PLACE (.000) ±.005
OVERTRAVEL ----- .500 MIN	IND	2	ANGLES ±
FREE POSITION	MOTOR	4	WEIGHT 5.0 OZ MAX
FULL OVERTRAVEL FORCE ----- 30 LB MAX	LAMP		

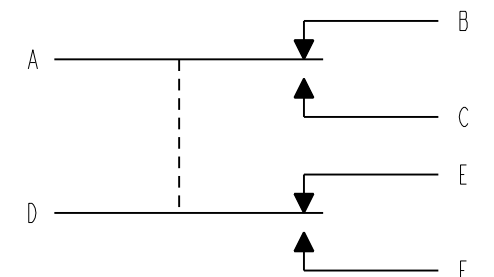

CIRCUIT DIAGRAM

ANSI Y14.5M-1982 APPLIES