

1N746A THRU 1N759A

SILICON ZENER DIODES
500mW, 3.3 THRU 12 VOLT
5% TOLERANCE



DO-35 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N746A series silicon Zener diode is a highly reliable voltage regulator designed for use in industrial, commercial, entertainment and computer applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_L=75^{\circ}\text{C}$)

Power Dissipation

Operating and Storage Junction Temperature

SYMBOL

P_D

T_J, T_{stg}

500

-65 to +200

UNITS

mW

$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$) $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$ (for all types)

Type	Zener Voltage $V_Z @ I_{ZT}$			Test Current	Maximum Zener Impedance	Maximum Reverse Leakage Current		Maximum Reverse Leakage Current @ $T_A=150^{\circ}\text{C}$		Maximum Regulator Current
	MIN	NOM	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		$I_R @ V_R$		I_{ZM}
	V	V	V	mA	Ω	μA	V	μA	V	mA
1N746A	3.135	3.3	3.465	20	28	10	1.0	30	1.0	110
1N747A	3.420	3.6	3.780	20	24	10	1.0	30	1.0	100
1N748A	3.705	3.9	4.095	20	23	10	1.0	30	1.0	95
1N749A	4.085	4.3	4.515	20	22	2.0	1.0	30	1.0	85
1N750A	4.465	4.7	4.935	20	19	2.0	1.0	30	1.0	75
1N751A	4.845	5.1	5.355	20	17	1.0	1.0	20	1.0	70
1N752A	5.320	5.6	5.880	20	11	1.0	1.0	20	1.0	65
1N753A	5.890	6.2	6.510	20	7.0	0.1	1.0	20	1.0	60
1N754A	6.460	6.8	7.140	20	5.0	0.1	1.0	20	1.0	55
1N755A	7.125	7.5	7.875	20	6.0	0.1	1.0	20	1.0	50
1N756A	7.790	8.2	8.610	20	8.0	0.1	1.0	20	1.0	45
1N757A	8.645	9.1	9.555	20	10	0.1	1.0	20	1.0	40
1N758A	9.50	10	10.50	20	17	0.1	1.0	20	1.0	35
1N759A	11.40	12	12.60	20	30	0.1	1.0	20	1.0	30

1N746A THRU 1N759A
SILICON ZENER DIODES
500mW, 3.3 THRU 12 VOLT
5% TOLERANCE



DO-35 CASE - MECHANICAL OUTLINE

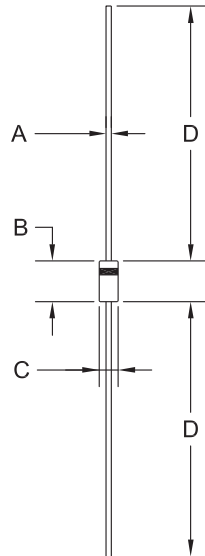

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.018	0.022	0.46	0.56
B	0.120	0.200	3.05	5.08
C	0.060	0.090	1.52	2.29
D	1.000	-	25.40	-

DO-35 (REV: R1)

MARKING: FULL PART NUMBER

R1

R1 (17-December 2013)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[1N753A TR \(10K TAPE & REEL\)](#) [1N757A TR](#) [1N750D BK](#) [1N757A](#) [1N750A](#) [1N748A](#) [1N754A](#) [1N747A](#) [1N756A](#)
[1N749A](#) [1N755A](#) [1N753A](#) [1N759A](#) [1N746A](#) [1N751A](#) [1N752A](#) [1N758A](#) [1N751A TR](#) [1N750A TR](#) [1N749A TR](#)
[1N752A TR](#) [1N756A TR](#) [1N753A TR](#) [1N759A TR](#) [1N757A BK](#) [1N758A TR](#) [1N746A TR](#) [1N748A BK](#)